Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

SKU: 9781107107922-SOLUTIONS

CHAPTER 2

P. P 2.1

$$P=\lim_{T\to\infty}\frac{1}{2T}\int_{-T}^{T}y^2(t)dt=\lim_{T\to\infty}\frac{1}{2T}\int_{-T}^{T}4\cos^2\pi t dt=\lim_{T\to\infty}\frac{4}{2T}\int_{-T}^{T}\frac{1}{2}(1+\cos 2\pi t)dt$$

$$=\lim_{T\to\infty}\frac{4}{2T}\frac{2T}{2}=2$$


Since 0<P<∞, i.e. the signal has finite power, it is a power signal.

P.P. 2.2


(a) $$t(2-t)=\begin{cases}2(2-t), & 0<2-t<1\\ 3-(2-t), & 1<2-t<3\end{cases}=\begin{cases}4-2t, & 1<t<2\\ 1+t, & -1<t<1\end{cases}=\begin{cases}1+t, & -1<t<1\\ 4-2t, & 1<t<2\end{cases}$$

(b) $$y(1+t/3)=\begin{cases}2(1+t/3), & 0\le 1+t/3<1\\ 3-(1+t/3), & 1\le 1+t/3\le 3\end{cases}=\begin{cases}2+2t/3, & -3\le t\le 0\\ 2-t/3, & 0<t<6\end{cases}$$

These are sketched below.

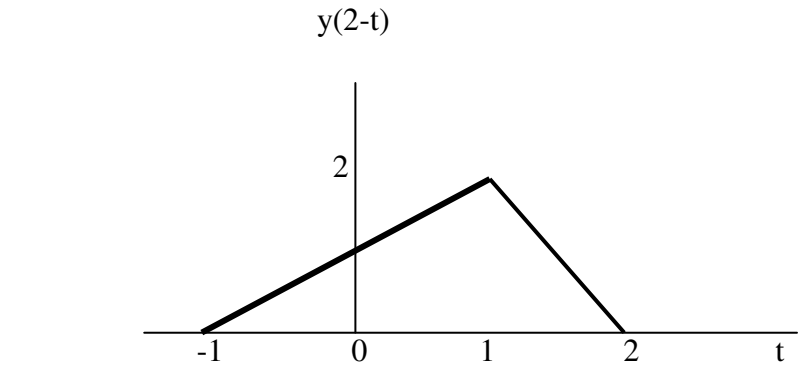

(a)

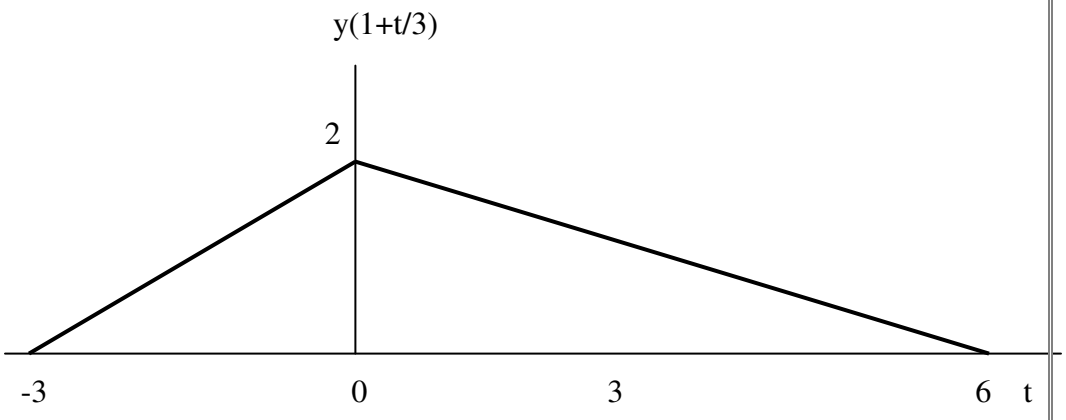

(b)

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

P.P. 2.3

Comparing the given signal with the square wave in Table 2.2, we notice that

$A = 1,\ T = 2, \omega_o = 2\pi / T = \pi.$ Hence,

$$f(t) = \frac{4}{\pi}\sum_{n=1}^{\infty}\frac{1}{2n-1}\sin(2n-1)\pi t = \frac{4}{\pi}\sum_{k=1}^{\infty}\frac{1}{n}\sin \pi n t, \qquad n = 2k-1$$


P.P. 2.4

We **c**omparing the given signal with the triangular wave in Table 2.2, we notice that

$A = 4, T = 2, \omega_o = 2\pi / T = \pi.$ Hence,

$$h(t) = \frac{4}{2} - \frac{16}{\pi^2}\sum_{n=1}^{\infty}\frac{\cos(2n-1)\pi t}{(2n-1)^2} = 2 - \frac{16}{\pi^2}\sum_{k=1}^{\infty}\frac{\cos n\pi t}{n^2}, \qquad n = 2k-1$$

The phase spectrum is zero, while the amplitude spectrum is shown below.

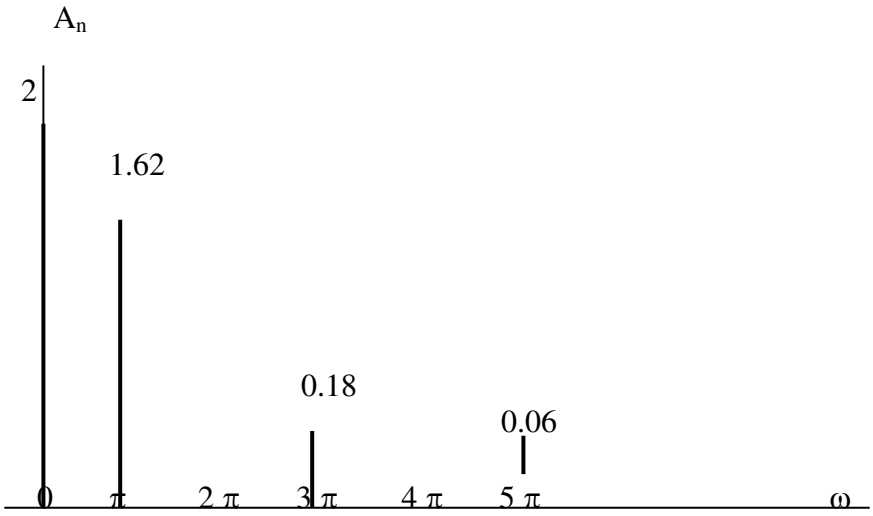

P.P. 2.5

$T = 10, \omega_o = 2\pi / T = \pi / 5$

$$c_n = \frac{1}{T}\int_{-T/2}^{T/2} f(t)e^{-jn\omega_o t}dt = \frac{1}{10}\int_{-1}^{1} 10e^{-jn\omega_o t}dt = \frac{1}{-jn\omega_o}e^{-jn\omega_o t}\Big|_{-1}^{1} = \frac{1}{-jn\omega_o}\left(e^{-jn\omega_o} - e^{jn\omega_o}\right)$$

$$= \frac{2}{n\omega_o}\left(\frac{e^{jn\omega_o} - e^{-jn\omega_o}}{2j}\right) = 2\frac{\sin n\omega_o}{n\omega_o} = 2\frac{\sin n\pi/5}{n\pi/5}$$

$$f(t) = 2\sum_{n=-\infty}^{\infty}\frac{\sin\lambda}{\lambda}e^{j\lambda t}, \qquad \lambda = \frac{n\pi}{5}$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

P.P. 2.6

$$C_n = \frac{1}{T}\int_0^T f(t)e^{-j\omega_o nt}dt, \quad \omega_o = \frac{2\pi}{2} = \pi$$

$$C_n = \frac{1}{2}\int_{-1}^{1} te^{-jn\pi t}dt$$

Using integration by parts,

$$u = t \text{ and } du = dt$$

$$dv = e^{-jn\pi t}dt \text{ which leads to } v = -[1/(2jn\pi)]e^{-jn\pi t}$$

$$C_n = -\frac{t}{2jn\pi}e^{-jn\pi t}\Big|_{-1}^{1} - \frac{1}{2jn\pi}\int_{-1}^{1} e^{-jn\pi t}dt$$

$$= \frac{j}{2n\pi}\left[e^{-jn\pi} + e^{jn\pi t}\right] + \frac{1}{2n^2\pi^2(-j)^2}e^{-jn\pi t}\Big|_{-1}^{1}$$

$$= [j/(n\pi)]\cos(n\pi) - [1/(2n^2\pi^2)](e^{-jn\pi} - e^{jn\pi})$$


$$C_n = \frac{j(-1)^n}{n\pi} - \frac{2j}{2n^2\pi^2}\sin(n\pi) = \frac{j(-1)^n}{n\pi}$$

Thus


$$f(t) = \sum_{n=-\infty}^{\infty} C_n e^{jn\omega_o t} = \sum_{n=-\infty}^{\infty} (-1)^n \frac{j}{n\pi} e^{jn\pi t}$$

The amplitude and phase spectra are shown next.

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

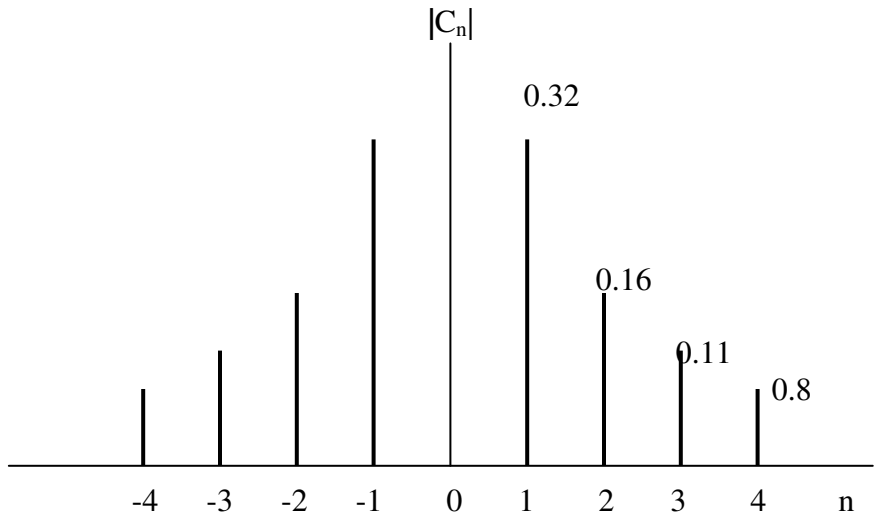

(a)

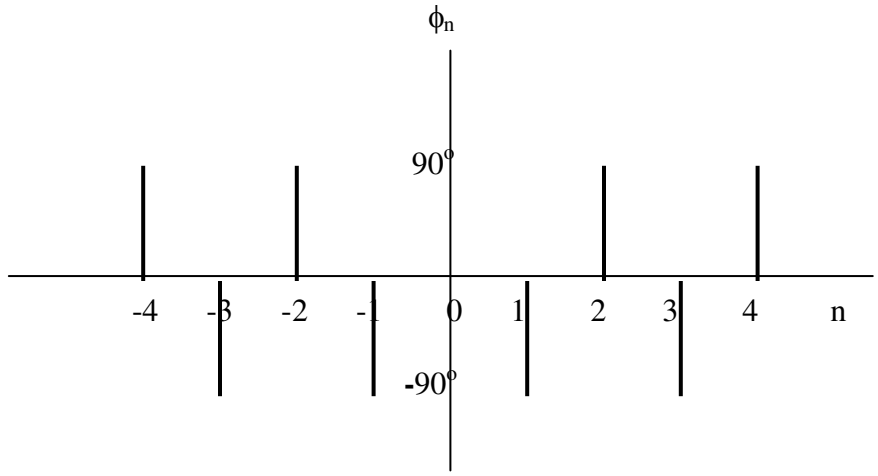

(b)

P.P. 2.7

$$P = \frac{1}{T}\int_0^T f^2(t)dt = \frac{1}{2\pi}\int_0^\pi (1)^2 dt = \frac{\pi}{2\pi} = 0.5$$

$$C_o = \frac{1}{T}\int_0^T f(t)dt = \frac{1\times\pi}{2\pi} = 0.5$$


$$\omega_o = 2\pi/T = 1$$

$$C_n = \frac{1}{T}\int_0^T f(t)e^{-jn\omega_o t}dt = \frac{1}{2\pi}\int_0^\pi (1)e^{-jnt}dt = \frac{1}{2\pi(-jn)}(e^{-jn\pi}-1)$$

$$= \frac{j}{2n\pi}(\cos n\pi - j\sin n\pi - 1) = \begin{cases} \dfrac{-j}{n\pi}, & n = 1,3,5,7,... \\ 0, & n = 2,4,6,... \end{cases}$$

$$|C_n|^2 = \begin{cases} \dfrac{1}{n^2\pi^2}, & n = 1,3,5,7,... \\ 0, & n = 2,4,6,... \end{cases}$$

The power spectrum is shown below.

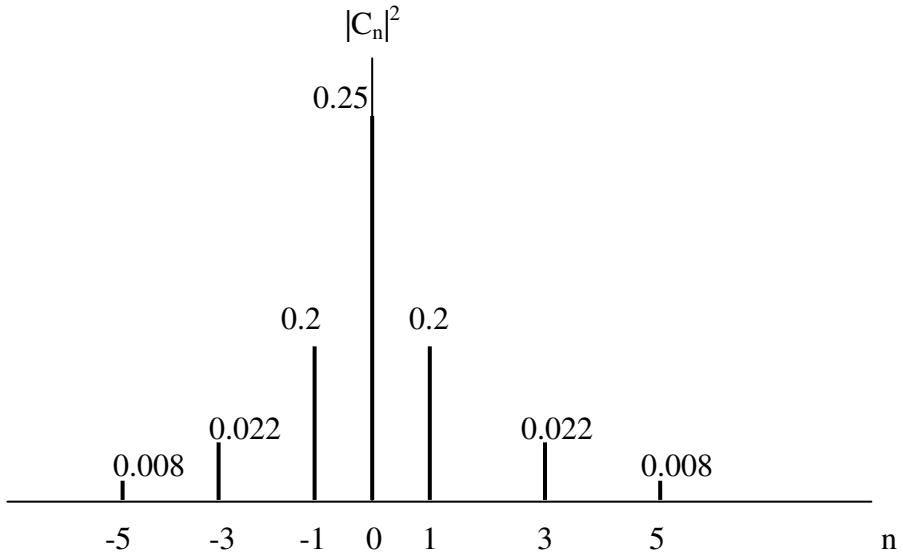

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

P.P. 2.8

(a) $X(\omega)=\int_0^1 (1)e^{-j\omega t}=-\frac{1}{j\omega}\left[e^{-j\omega}-1\right]=\frac{1}{j\omega}\left[1-e^{-j\omega}\right]$

(b) $\mathcal{F}[\delta(t-t_o)=e^{-j\omega t_o}$

Let $t_o=-3.$

$$X(\omega)=e^{j3\omega}$$

(c) $X(\omega)=2\mathcal{F}\left[\frac{e^{j\omega t}+e^{-j\omega t}}{2}\right]$

$$=2\pi\left[\delta(\omega+\omega_o)+\delta(\omega-\omega_o\right]$$

P.P. 2.9

$$X(\omega)=\int_{-\tau}^{0}\left(1+\frac{t}{\tau}\right)e^{-j\omega t}dt+\int_0^{\tau}\left(1-\frac{t}{\tau}\right)e^{-j\omega t}dt$$

$$=\int_0^{\tau}\left(1-\frac{t}{\tau}\right)e^{+j\omega t}dt+\int_0^{\tau}\left(1-\frac{t}{\tau}\right)e^{-j\omega t}dt$$

$$=2\int_0^{\tau}\left(1-\frac{t}{\tau}\right)\cos\omega t dt$$

$$=\frac{2\sin\omega t}{\omega}-\frac{2}{\tau\omega^2}(\cos\omega\tau+\omega\tau\sin\omega\tau-1)$$

$$=\frac{2}{\tau\omega^2}(1-\cos\omega\tau)$$

But $\cos 2u=1-2\sin^2 u$

$$1-\cos\omega\tau=2\sin^2\omega\tau/2$$

$$X(\omega)=\frac{4}{\tau\omega^2}\sin^2\omega\tau/2=\tau\frac{\sin^2\omega\tau/2}{(\omega\tau/2)^2}$$

$$=\tau\sin c^2\frac{\omega\tau}{2}$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

P.P. 2.10

$$f(t)=\begin{cases} e^{at}, & t<0 \\ 0, & t>0 \end{cases}$$

$$F(\omega)=\int_{-\infty}^{\infty} f(t)e^{-j\omega t}dt=\int_{-\infty}^{0} e^{at}e^{-j\omega t}dt=\int_{-\infty}^{0} e^{(a-j\omega)t}dt$$

$$=\frac{1}{a-j\omega}e^{(a-j\omega)t}\Big|_{-\infty}^{0}=\frac{1}{a-j\omega}$$

The energy spectral density is

$$G(\omega)=|F(\omega)|^2=\frac{1}{a^2+\omega^2}, \qquad \omega=2\pi f \qquad (2.10.2)$$

Thus, the energy contained in the frequency range of $-f_o < f < f_o$ is

$$E=\int_{-f_o}^{f_o}\frac{df}{a^2+(2\pi f)^2} \qquad (2.10.3)$$

The integrand is even so that we can integrate from 0 to f_o and multiply by 2.

If we let $u = 2\pi f/a$ so that $df = adu/2\pi$, eq. (2.10.3) becomes

$$E=\frac{2a}{2\pi a^2}\int_{0}^{2\pi f_o/a}\frac{du}{1+u^2}=\frac{1}{\pi a}\tan^{-1}\frac{2\pi f_o}{a}$$

P.P. 2.11

(a) $X(\omega)=1\left(e^{-j\omega 2}+e^{-j\omega}+e^{j\omega}+e^{j\omega 2}\right)=2\left(\cos\omega+\cos 2\omega\right)$

(b) $y(t)=2te^{-t}u(t)$


Let $g(t)=2e^{-t}u(t) \longrightarrow G(\omega)=\frac{2}{1+j\omega}$

$$y(t)=tg(t) \longrightarrow j\frac{dG(\omega)}{d\omega}=j2(-1)j(1+j\omega)^{-2}$$

$$Y(\omega)=\frac{2}{(1+j\omega)^2}$$

(c) z(t) and its derivatives are shown below.

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

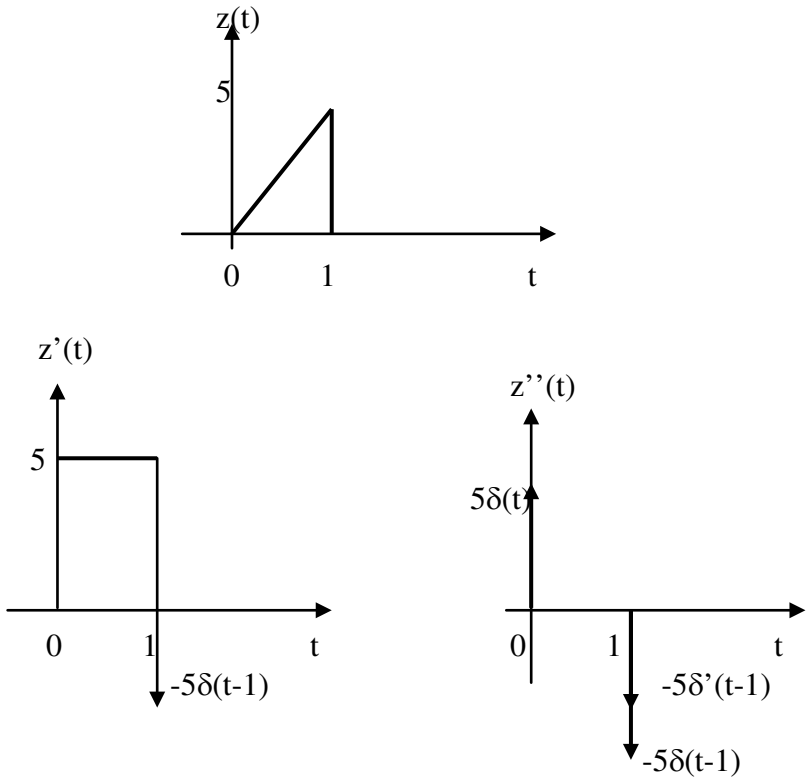

$$z''(t) = 5\delta(t) - 5\delta(t-1) - 5\delta'(t-1)$$

$$(j\omega)^2 Z(\omega) = 5 - 5e^{-j\omega} - 5j\omega e^{-j\omega}$$

$$Z(\omega) = \frac{-5}{\omega^2}(1 - e^{-j\omega} - j\omega e^{-j\omega})$$

P.P. 2.12

Taking the first derivative gives y'(t) in Fig. A. Taking the second derivative gives y''(t) as in Fig. B.

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

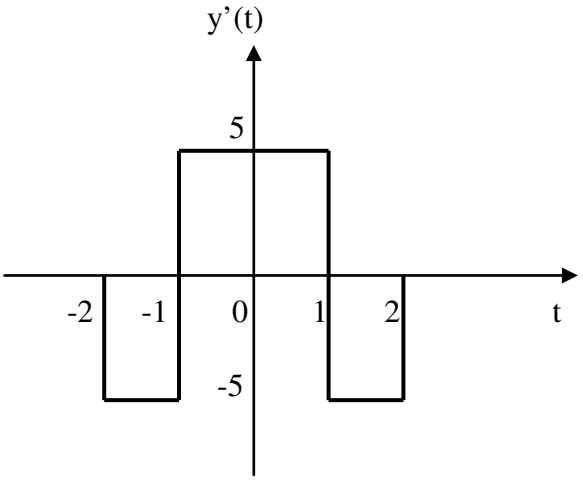


Fig. A

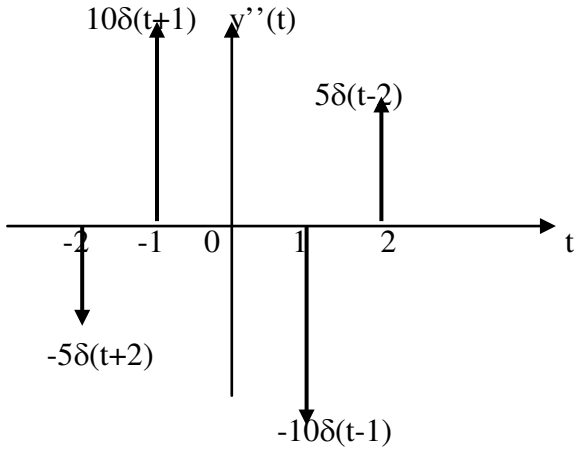


Fig. B

From Fig. B,

$$y''(t) = -5\delta(t+2) + 10\delta(t+1) - 10\delta(t-1) + 5\delta(t-2)$$

Taking the Fourier transform of each term,

$$(j\omega)^2 Y(\omega) = -5e^{j2\omega} + 10e^{j\omega} - 10e^{-j\omega} + 5e^{-j2\omega}$$

$$= -5(e^{j2\omega} - e^{-j2\omega}) + 10(e^{j\omega} - e^{-j\omega})$$

$$-\omega^2 Y(\omega) = 20j\sin\omega - 10j\sin 2\omega$$

or

$$Y(\omega) = \frac{j10}{\omega^2}(\sin 2\omega - \sin\omega)$$

P.P. 2.13

(a) $f(t) = e^{-(t-2)}u(t-2)$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

(b) $$g(t)=\frac{1}{2\pi}\int_{-\infty}^{\infty}G(\omega)e^{j\omega t}\,d\omega=\frac{1}{2\pi}\int_{-\infty}^{\infty}\frac{\pi\delta(\omega)\,e^{j\omega t}}{(5+j\omega)(2+j\omega)}d\omega$$

$$=\frac{1}{2}\,\frac{1}{(5)(2)}=\frac{1}{20}=0.05$$

P.P. 2.14

$$-20=20\log|H| \quad\longrightarrow\quad H=10^{-20/20}=0.1$$

$$1+\left(\frac{\omega}{\omega_c}\right)^2=\frac{1}{0.1^2}=100$$

Let $$X=\frac{\omega}{\omega_c}=\frac{2\pi f}{2\pi f_c}=\frac{f}{f_c}$$

$$X^n=99 \quad\longrightarrow\quad X=99^{1/n}=99^{1/3}=4.6261$$

$$f_c=\frac{f}{X}=\frac{50}{4.6261}=10.81\text{ MHz}$$

$$H(s)=\frac{\omega_c^3}{s^3+2\omega_c s^2+2\omega_c^2 s+\omega_c^3}$$

where $\omega_c=2\pi f_c=2\pi\times10.81\times10^6$ rad/s=6.791×10^7 rad/s

P.P. 2.15

$$H(\omega)=\frac{V_o}{V_i}=\frac{R\,\|\,\frac{1}{j\omega C}}{j\omega L+R\,\|\,\frac{1}{j\omega C}}=\frac{\frac{R}{j\omega C}}{R+\frac{1}{j\omega C}}=\frac{\frac{R}{1+j\omega RC}}{j\omega L+\frac{R}{1+j\omega RC}}$$

$$=\frac{R}{R(1-\omega^2LC)+j\omega L}$$

Since R = 1,

$$H(s)=\frac{1}{s^2LC+sL+1} \qquad (s=j\omega)$$

$$H(s)=\frac{1/LC}{s^2+s/C+1/LC}$$

We compare this with

$$H(s)=\frac{k}{s^2+1.4142\omega_c s+\omega_c^2}$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

$$H(0) = \frac{k}{\omega_c^2} = 1$$

$$\omega_c^2 = \frac{1}{LC}$$

$$\frac{1}{C} = 1.4142 \quad \longrightarrow \quad C = 0.7071 = 707.1 \text{ mF}$$

If $\omega_c = 1, \quad L = 1/C = 1.4142$ H

Prob.2.1

(a) An analog signal is a continuous-time signal in which the variation with time is analogous to some physical phenomenon.
(b) A digital signal is a discrete-time signal that can have a finite number of values (usually binary).
(c) A continuous-time signal takes a value at every instant of time.
(d) A discrete-time signal is defined only at particular instants of time.

Prob. 2.2


(a) A periodic signal is one that repeats itself every T seconds.
(b) An aperiodic signal is a nonperiodic signal, i.e. it does not repeat itself.
(c) A signal is said to be an energy signal when the total energy E of the signal satisfies the condition $0 < E < \infty$

(d)A signal is called a power signal when its average power P satisfies the condition

$0 < P < \infty$


Prob. 2.3

(a) $x_1(t)$ is sketched below.

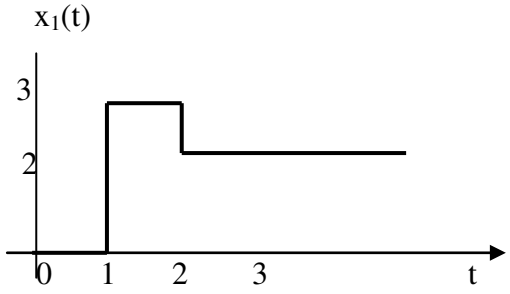


Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

(b) $x_2(t) = 2\Pi(10t) = 2\Pi(t/0.1)$. It is sketched below.

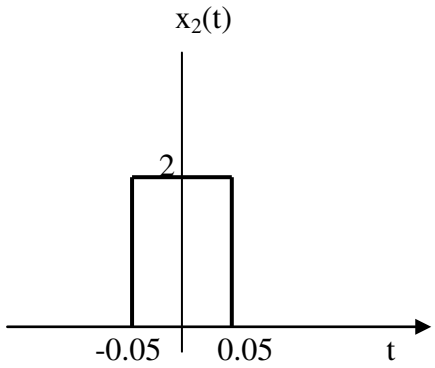

(c) $x_3(t)$ is shown below.

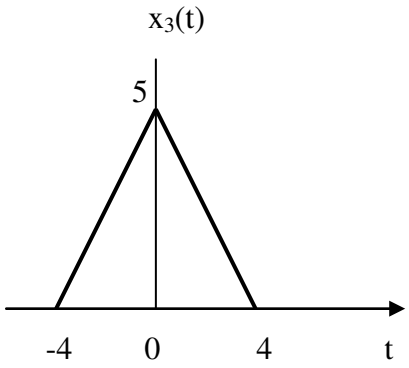


Prob. 2.4

(a) Since sinc (x)= sin(x)/x,


$\sin(\pi t_o / 3) = \sin(n\pi) \longrightarrow t_o = 3n$

$y_1(t)$ is sketched below.


Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

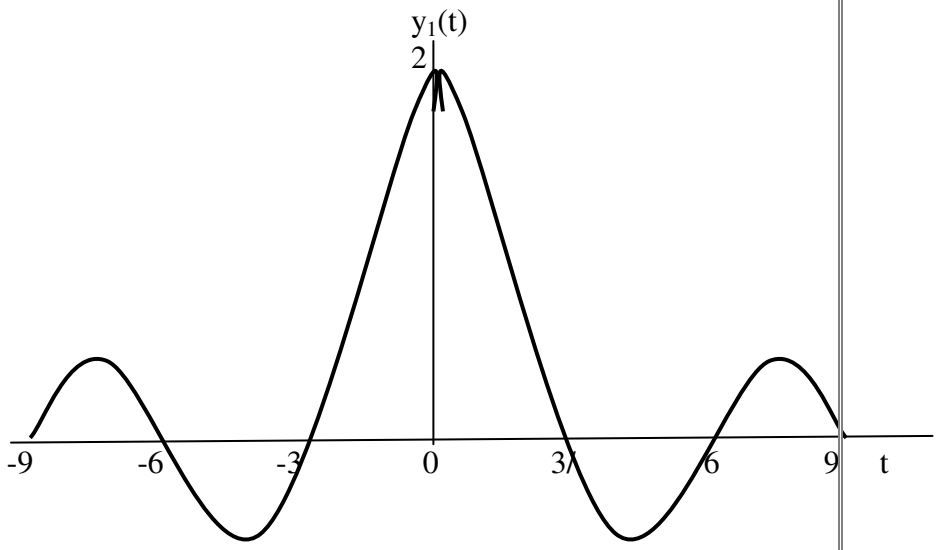

(b) $y_2(t)$ is sketched below.

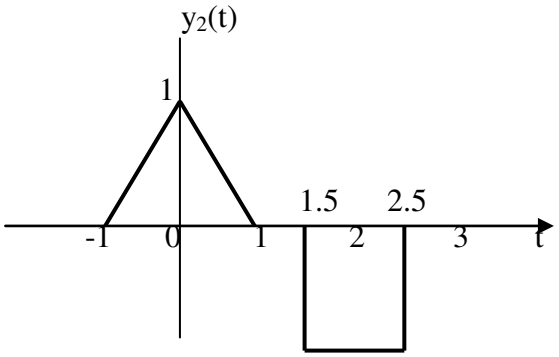


(c) $y_3(t)$ is shown below.

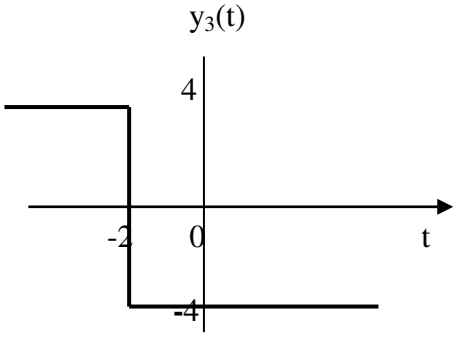


Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Prob. 2.5


(a) $x_1(t) = x(-t)$ is sketched below.




(b) $x_2(t) = x(t+2)$ is sketched below.



(c) $x_3(t) = 1 + 2x(t)$ is shown below.

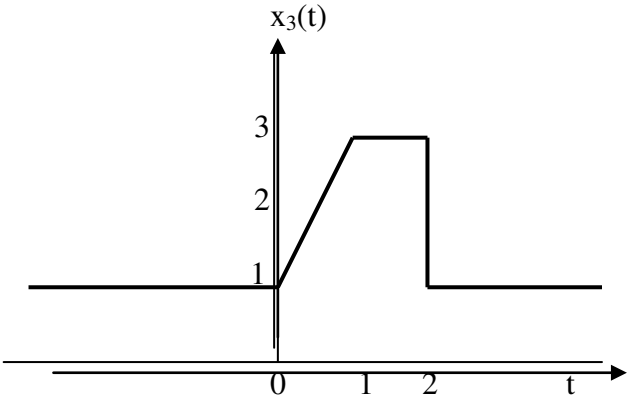


(d) $x_4(t) = x(2t)$ is shown below.



Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

(e) $x_5(t) = x(t/4)$ is sketched below.

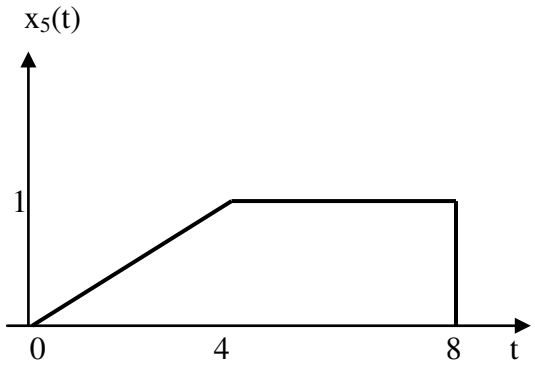

Prob. 2.6

(a) $$E = \int_{-\infty}^{\infty} (x(t))^2 dt = \int_{-\infty}^{\infty} e^{-2|t|} d = 2\int_{0}^{\infty} e^{-2t} dt = \frac{2}{-2} e^{-2t} \Big|_0^{\infty} = 1 < \infty$$

i.e. $x(t)$ is an energy signal.

(b) $$E = \lim_{T\to\infty} \int_0^T (y(t))^2 dt = \lim_{T\to\infty} \int_0^T t^2 dt = \lim_{T\to\infty} \frac{T^3}{3} = \infty$$

$$P = \lim_{T\to\infty} \frac{1}{T} \int_0^T (y(t))^2 dt = \lim_{T\to\infty} \frac{1}{T} \int_0^T t^2 dt = \lim_{T\to\infty} \frac{1}{T} \frac{T^3}{3} = \infty$$

i.e. $y(t)$ is neither energy nor power signal.

(c) $$E = \int_{-\tau}^{\tau} (z(t))^2 dt = 2\int_0^{\tau} \left(1 - \frac{t}{\tau}\right)^2 dt = 2\left(t - \frac{t^2}{\tau} + \frac{t^3}{3\tau^2}\right)\Big|_0^{\tau} = 2\left(\tau - \tau + \frac{1}{3}\tau\right) = \frac{2}{3}\tau$$

Hence, $z(t)$ is an energy signal.

Prob. 2.7

It is not possible to generate power signal in a lab because such a signal would have infinite duration and infinite energy. Signals generated in the lab have finite energy and are energy signals.

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Prob. 2.8

$$P = \frac{1}{T}\int_0^T f^2(t)dt$$

$$P_g = \frac{1}{T}\int_0^T g^2(t)dt = \frac{1}{T}\int_0^T a^2 f^2(bt+c)dt$$

Let $bt + c = \lambda, \quad dt = d\lambda / b$

$$P_g = \frac{a^2}{b}\frac{1}{T}\int_c^{bT+c} f^2(\lambda)d\lambda = \frac{a^2}{b}P$$

Prob. 2.9

(a) A system is linear when its output is linearly related to its input.
(b) A nonlinear system is one in which the output is not linearly related to its input.
(c) A continuous-time system has input and output signals that are continuous-time.
(d) A discrete-time system has input and output signals that are discrete-time.

Prob. 2.10

(a) A time-varying system is one in which the input-output relationship varies with time.
(b) A time-invariant system is one in which the input-output relationship does not vary with time.
(c) A casual system is one whose output signal (response) does not start before the input signal (excitation) is applied.
(d) A noncausal system is one in which the response depends on the future values of the input.
(e) An analog system is one whose input signal is analog.
(f) A digital system is one whose input is in the form of a sequence of digits.

Prob. 2.11

(a) Linear
(b) Nonlinear
(c) Linear

Prob. 2.12

(a) Linear
(b) Nonlinear
(c) Nonlinear

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Prob. 2.13

$T = 4, \omega_o = 2\pi / T = \pi / 2$

$$f(t) = \begin{cases} 5, & 0 < t < 1 \\ 10, & 1 < t < 2 \\ 0, & 2 < t < 4 \end{cases}$$

$$a_0 = \frac{1}{T}\int_0^T f(t)dt = \frac{1}{4}\left[\int_0^1 5dt + \int_1^2 10dt\right] = 3.75$$

$$a_n = \frac{2}{T}\int_0^T f(t)\cos n\omega_o t dt = \frac{2}{4}\left[\int_0^1 5\cos\frac{n\pi t}{2}dt + \int_1^2 10\cos\frac{n\pi t}{2}dt\right] = \frac{-5}{n\pi}\sin\frac{n\pi}{2}$$

$$b_n = \frac{2}{T}\int_0^T f(t)\sin n\omega_o t dt = \frac{2}{4}\left[\int_0^1 5\sin\frac{n\pi t}{2}dt + \int_1^2 10\sin\frac{n\pi t}{2}dt\right] = \frac{5}{n\pi}\left(1 - 2\cos n\pi + \cos\frac{n\pi}{2}\right)$$

Prob. 2.14

$T = 4, \omega_0 = 2\pi / T = \pi / 2, \quad b_n = 0$ since $f(t)$ is an even function.

$$f(t) = \begin{cases} 0, & -2 < t < -1 \\ \cos\frac{\pi}{2}t, & -1 < t < 1 \\ 0, & 1 < t < 2 \end{cases}$$

$$a_0 = \frac{2}{T}\int_0^{T/2} f(t)dt = \frac{2}{4}\int_0^1 \cos\frac{\pi}{2}t dt = \frac{1}{2}\frac{2}{\pi}\sin\frac{\pi}{2}t\Big|_0^1 = \frac{1}{\pi}$$

$$a_n = \frac{4}{T}\int_0^T f(t)\cos n\omega_0 t dt = \int_0^1 \cos\frac{\pi}{2}t\cos\frac{n\pi t}{2}dt$$

We apply the trig identity: cosAcosB = ½[cos(A+B) + cos(A-B)]

$$a_n = \frac{1}{2}\int_0^1\left[\cos\frac{\pi}{2}(n+1)t + \cos\frac{\pi}{2}(n-1)t\right]dt$$

For n = 1.

$$a_1 = \frac{1}{2}\int_0^1\left[\cos\pi t + 1\right]dt = \frac{1}{2}\left[\frac{\sin\pi t}{\pi} + t\right]\Big|_0^1 = \frac{1}{2}$$

For n > 1,

$$a_n = \frac{1}{\pi(n+1)}\sin\frac{\pi}{2}(n+1) + \frac{1}{\pi(n-1)}\sin\frac{\pi}{2}(n-1)$$

When n = odd, (n+1) and (n-1) are even so that $a_n = 0$.

When n = even, (n+1) and (n-1) are odd so that

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

$$\sin\frac{\pi}{2}(n+1) = -\sin\frac{\pi}{2}(n-1) = \cos\frac{\pi}{2}n = (-1)^{n/2}$$

$$a_n = \frac{(-1)^{n/2}}{\pi(n+1)} + \frac{-(-1)^{n/2}}{\pi(n-1)} = \frac{-2(-1)^{n/2}}{\pi(n^2-1)}$$

Thus,

$$f(t) = \frac{1}{\pi} + \frac{1}{2}\cos\frac{\pi}{2}t - \frac{2}{\pi}\sum_{n=even}^{\infty}\frac{(-1)^{n/2}}{(n^2-1)}\cos\frac{n\pi}{2}t$$

Prob. 2.15

$$T = 4, \omega_0 = 2\pi/T = \pi/2, \qquad a_0 = 0, \qquad f(t) = 2(t-1)$$

$$a_n = \frac{2}{T}\int_0^T f(t)\cos n\omega_o t dt = \frac{2}{4}\int_0^2 2(t-1)\cos\frac{n\pi}{2}tdt = \frac{1}{a^2}\cos at + \frac{1}{a}t\sin at - \frac{1}{a}\sin at\Big|_0^2, \qquad a = \frac{n\pi}{2}$$

$$a_n = \frac{1}{a^2}(\cos n\pi - 1) + \frac{2}{a}\sin n\pi - 0 - \frac{1}{a}\sin n\pi - 0 = \frac{4}{n^2\pi^2}(\cos n\pi - 1)$$

$$b_n = \int_0^2 (t-1)\sin atdt = \frac{1}{a^2}\sin at - \frac{1}{a}t\cos at + \frac{1}{a}\cos at\Big|_0^2$$

$$= 0 - \frac{1}{a}(2\cos n\pi - 1) + \frac{1}{a}(\cos n\pi - 1) = \frac{-2}{n\pi}(2 + \cos n\pi)$$

$$f(t) = \sum_{n=1}^{\infty}\left[\frac{4}{n^2\pi^2}(\cos n\pi - 1)\cos\frac{n\pi}{2}t - \frac{2}{n\pi}(2+\cos n\pi)\sin\frac{n\pi}{2}t\right]$$

Prob. 2.16

$b_n = 0$ since this is an even function

$T = 6, \ \omega = 2\pi/6 = \pi/3$

$$a_o = \frac{2}{T}\int_0^{T/2} f(t)dt = \frac{2}{6}\left[\int_1^2 (4t-4)dt + \int_2^3 4 \ dt\right]$$

$$= \frac{1}{3}\left[(2t^2 - 4t)\Big|_1^2 + 4(3-2)\right] = 2$$

$$a_n = \frac{4}{T}\int_0^{T/4} f(t)\cos(n\pi t/3)dt$$

$$= (4/6)[\int_1^2 (4t-4)\cos(n\pi t/3)dt + \int_2^3 4\cos(n\pi t/3)dt]$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

$$= \frac{16}{6}\left[\frac{9}{n^2\pi^2}\cos\left(\frac{n\pi t}{3}\right) + \frac{3t}{n\pi}\sin\left(\frac{n\pi t}{3}\right) - \frac{3}{n\pi}\sin\left(\frac{n\pi t}{3}\right)\right]_1^2 + \frac{16}{6}\left[\frac{3}{n\pi}\sin\left(\frac{n\pi t}{3}\right)\right]_2^3$$

$$= [24/(n^2\pi^2)][\cos(2n\pi/3) - \cos(n\pi/3)]$$

Thus $$f(t) = 2 + \frac{24}{\pi^2}\sum_{n=1}^{\infty}\frac{1}{n^2}\left[\cos\left(\frac{2\pi}{n}\right) - \cos\left(\frac{\pi}{n}\right)\right]\cos\left(\frac{n\pi}{3}\right)$$

At t = 2,

$$f(2) = 2 + (24/\pi^2)[(\cos(2\pi/3) - \cos(\pi/3))\cos(2\pi/3)$$

$$+ (1/4)(\cos(4\pi/3) - \cos(2\pi/3))\cos(4\pi/3)$$

$$+ (1/9)(\cos(2\pi) - \cos(\pi))\cos(2\pi) + \text{-----}]$$

$$= 2 + 2.432(0.5 + 0 + 0.2222 + \text{-----})$$

$$f(2) = 3.756$$


Prob. 2.17

Express each term in the standard form as $a_n \cos(\omega_n t + \theta_n)$.


$$\frac{1}{4}\sin(5t + 25^o) = \frac{1}{4}\cos(5t + 25^o - 90^o) = \frac{1}{4}\cos(5t - 65^o)$$

$$-\frac{1}{2}\cos(3t + 20^o) = \frac{1}{2}\cos(3t - 160^o)$$

Thus, the magnitude and phase spectra are shown below.

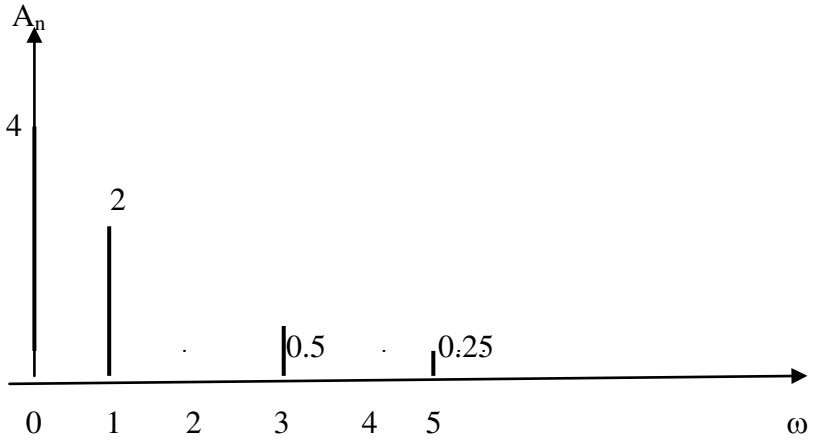

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

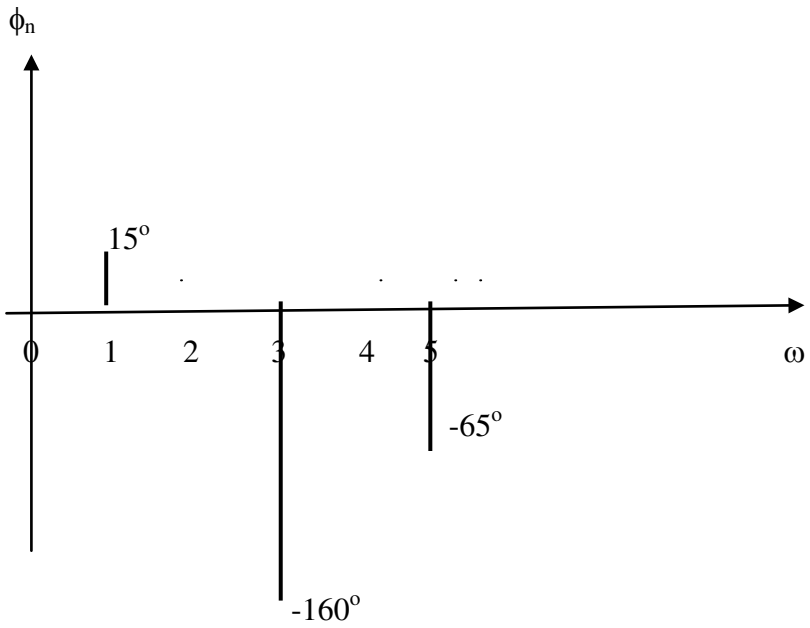

Prob. 2.18

$a_n = 20/(n^2\pi^2)$, $b_n = -3/(n\pi)$, $\omega_n = 2n$

$$A_n = \sqrt{a_n^2 + b_n^2} = \sqrt{\frac{400}{n^4\pi^4} + \frac{9}{n^2\pi^2}}$$


$$= \frac{3}{n\pi}\sqrt{1 + \frac{44.44}{n^2\pi^2}}, \quad n = 1, 3, 5, 7, 9, \text{ etc.}$$

n	A_n
1	2.24
3	0.39
5	0.208
7	0.143
9	0.109

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

$$\phi_n = \tan^{-1}(b_n/a_n) = \tan^{-1}\{[-3/(n\pi)][n^2\pi^2/20]\} = \tan^{-1}(-nx0.4712)$$

n	ϕ_n
1	–25.23°
3	–54.73°
5	–67°
7	–73.14°
9	–76.74°
∞	–90°

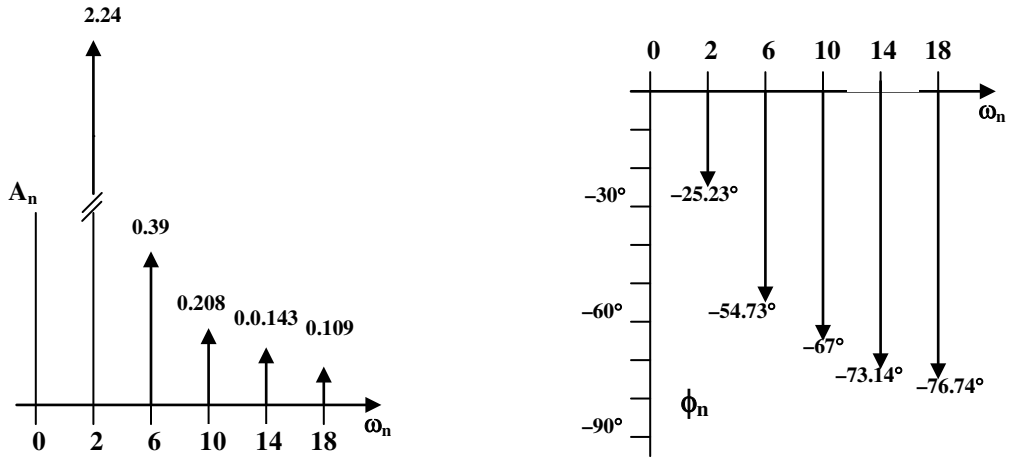

Prob. 2.19

$f(t) = 40\cos 5\pi t - 20\sin(2\pi t + \pi/6)\cos 5\pi t$

But $2\sin A\cos B = \sin(A+B) + \sin(A-B)$

$f(t) = 40\cos 5\pi t - 10\sin(7\pi t + \pi/6) - 10\sin(-3\pi t + \pi/6)$

Also, $\sin\alpha = \cos(\alpha - 90^o)$

$f(t) = 40\cos 5\pi t - 10\cos(7\pi t - 60^o) + 10\cos(3\pi t - 120^o)$

Thus,

$a_1 = 40, a_2 = -10, a_3 = 10, \omega_1 = 5\pi, \omega_2 = 7\pi, \omega_3 = 3\pi, \theta_1 = 0, \theta_2 = -60^2, \theta_3 = -120^o$

Prob. 2.20

This is an even function.

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

$b_n = 0, T = 4, \omega_o = 2\pi / T = \pi / 2$

$$a_0 = \frac{\frac{1}{2}(2+4)4}{4} = 3$$

$$f(t) = \begin{cases} 4t, & 0 < t < 1 \\ 4, & 1 < t < 3 \\ 8 - 4t, & 3 < t < 4 \end{cases}$$

$$a_n = \frac{4}{T}\int_0^{T/2} f(t)\cos n\omega_o t dt, \qquad \alpha = n\omega_0 = n\pi/2$$

$$a_n = \frac{4}{4}\left[\int_0^1 4t\cos\alpha t dt + \int_1^2 4\cos\alpha t dt\right] = 4\left[\frac{1}{\alpha^2}\cos\alpha t + \frac{t}{\alpha}\sin\alpha t\right]\Bigg|_0^1 - \frac{4}{\alpha}\cos\alpha t\Bigg|_1^2$$

$$= 4\left[\frac{1}{\alpha^2}(\cos\alpha - 1) + \frac{1}{\alpha}\sin\alpha - 0\right] - \frac{4}{\alpha}(\cos 2\alpha - \cos\alpha)$$

$$= \frac{16}{n^2\pi^2}(\cos\frac{n\pi}{2} - 1) + \frac{8}{n\pi}(\sin\frac{n\pi}{2} + \cos\frac{n\pi}{2} - \cos n\pi)$$

$$f(t) = 3 + \sum_{n=1}^{\infty} a_n \cos\frac{n\pi}{2} t$$

Prob. 2.21

(a) Since f(t) is an odd function, $a_0 = 0 = a_n$. $\quad T = \pi, \omega_o = 2\pi / T = 2$

$$b_n = \frac{4}{T}\int_0^{T/2} f(t)\sin n\omega_o t dt = \frac{4}{\pi}\int_0^{\pi/2} t\sin 2nt dt = \frac{4}{\pi}\left[\frac{1}{4n^2}\sin 2nt - \frac{t}{n\pi}\cos 2nt\right]\Bigg|_0^{\pi/2}$$

$$= \frac{4}{\pi}\left[-\frac{\pi}{2n\pi}\cos n\pi\right] = \frac{2}{n\pi}(-1)^{n+1}$$

$$f(t) = \frac{2}{\pi}\sum_{n=1}^{\infty}\frac{(-1)^{n+1}}{n}\sin 2nt$$

(b) The total average power is

$$P_T = \frac{1}{T}\int_0^T f^2(t)dt = \frac{2}{\pi}\int_0^2 \frac{4t^2}{\pi^2}dt = \frac{8}{\pi^3}\frac{t^3}{3}\Bigg|_0^{\pi/2} = \frac{1}{3}$$

$$P_4 = a_0^2 + \frac{1}{2}\sum A_n^2 = \frac{1}{2}\sum b_n^2 = \frac{1}{2}\left(\frac{4}{\pi^2} + \frac{4}{4\pi^2} + \frac{4}{9\pi^2} + \frac{4}{25\pi^2}\right) = \frac{2}{\pi^2}(1 + \frac{1}{4} + \frac{1}{9} + \frac{1}{25})$$

$$= 0.2026(1.4011) = 0.2839$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Prob. 2.22

$T = 2\pi, \omega_0 = 2\pi / T = 1$

$$C_n = \frac{1}{2\pi}\int_{-\pi}^{\pi} t^2 e^{-jnt} dt$$

We integrate by parts twice and obtain

$$C_n = \frac{2}{n^2}\cos n\pi = \frac{2}{n^2}(-1)^n, \qquad n \neq 0$$

For $n = 0,$

$$C_0 = \frac{1}{2\pi}\int_{-\pi}^{\pi} t^2 dt = \frac{\pi^2}{3}$$

Hence,

$$f(t) = \frac{\pi^2}{3} + \sum_{n=-\infty, n\neq 0}^{\infty} \frac{2(-1)^n}{n^2} e^{jnt}$$

Prob. 2.23

$$C_n = \frac{1}{T}\int_0^T f(t)e^{-j\omega_0 nt} dt = \frac{1}{T}\int_{-\tau}^{0} (1)e^{-j\omega_0 nt} dt + \frac{1}{T}\int_0^{\tau} (-1)e^{-j\omega_0 nt} dt$$

$$= \frac{1}{T}\frac{e^{-j\omega_0 nt}}{-j\omega_0 n}\bigg|_{-\tau}^{0} - \frac{1}{T}\frac{e^{-j\omega_0 nt}}{-j\omega_0 n}\bigg|_{0}^{\tau} = \frac{1}{-j\omega_0 nT}(1 - e^{-j\omega_0 n\tau}) + \frac{1}{j\omega_0 nT}(e^{-j\omega_0 n\tau} - 1) = \frac{2}{j\omega_0 nT}(e^{-j\omega_0 n\tau} - 1)$$

But $\omega_o = \frac{2\pi}{T},$

$$C_n = \frac{1}{jn\pi}(e^{-j2n\pi\tau/T} - 1), n \neq 0$$

For $n = 0,$

$$C_0 = \frac{1}{T}\int_{-\tau}^{0} e^{-j\omega_0 t} dt + \frac{1}{T}\int_0^{\tau} (-1)e^{-j\omega_0 t} dt = \frac{1}{T}\frac{e^{-j\omega_0 t}}{-j\omega_0}\bigg|_{-\tau}^{0} - \frac{1}{T}\frac{e^{-j\omega_0 t}}{-j\omega_0}\bigg|_{0}^{\tau}$$

But $\omega_0 = \frac{2\pi}{T} \longrightarrow \omega_o T = 2\pi$

$$C_0 = \frac{-1}{2\pi}(1 - e^{j\omega_0\tau}) + \frac{1}{2\pi}(e^{-j\omega_0\tau} - 1) = \frac{1}{\pi}(\cos\omega_0\tau - 1)$$

$$f(t) = \frac{1}{\pi}(\cos 2\pi\tau/T - 1) + \sum_{\substack{n=-\infty \\ n\neq 0}}^{\infty} \frac{1}{jn\pi}(e^{-j2n\pi\tau/T} - 1)e^{jn\pi t/T}$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Prob. 2.24

$$T = 2, \omega_0 = 2\pi / T = \pi$$

$$C_n = \frac{1}{2}\int_{-1}^{0} 4(1+t)e^{-jn\pi t}dt = 2\left[\frac{e^{-jn\pi t}}{-jn\pi} + \frac{e^{-jn\pi t}}{-n^2\pi^2}(-jn\pi t - 1)\right]\Bigg|_{-1}^{0}$$

$$= 2\left[\frac{(1-e^{jn\pi})}{-jn\pi} - \frac{1}{n^2\pi^2} + \frac{e^{jn\pi}}{n^2\pi^2}(jn\pi - 1)\right] = 2\left[\frac{(1-\cos n\pi - j\sin n\pi)}{-jn\pi} - \frac{1}{n^2\pi^2} + \frac{(\cos n\pi + \sin n\pi)}{n^2\pi^2}(jn\pi -\right.$$

$$= 2\left[\frac{j}{n\pi}(1-\cos n\pi) - \frac{1}{n^2\pi^2} + \frac{(jn\pi - 1)}{n^2\pi^2}\cos n\pi\right]$$

Prob. 2.25

(a) $g(t) = f(t-2) = \sum C_n e^{jn\omega_o(t-2)} = \sum C_n e^{-j2n\omega_0} e^{jn\omega_o t}$

$$C_n^{'} = C_n e^{-j2n\omega_0}$$

(b) $h(t) = 2\frac{df}{dt} = \sum 2C_n(jn\omega_0)e^{jn\omega_o t}$

$$C_n^{'} = 2jn\omega_0 C_n$$

(c) $y(t) = \frac{d^2 f}{dt^2} - \frac{df}{dt} = \sum C_n(j^2 n^2\omega_0^2 - jn\omega_0)e^{jn\omega_o t}$

$$C_n^{'} = -C_n(n^2\omega_0^2 + jn\omega_0)$$

Prob. 2.26

(a) $X(\omega) = \frac{\pi}{(1+j\omega)^2 + \pi^2}$

(b) $Y(\omega) = \frac{1}{3}\left[e^{-j\omega/3} + e^{j\omega/3}\right]$

(c) sgn(t) $\Leftrightarrow \frac{2}{j\omega}$

$$Z(\omega) = \frac{2}{j(\omega+1)}$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Prob. 2.27

(a) $X(\omega)=\int_{-1}^{1}4e^{-j\omega t}dt=\frac{4}{-j\omega}e^{-j\omega t}\Big|_{-1}^{1}=\frac{4}{-j\omega}(e^{-j\omega}-e^{j\omega})$

$=\frac{8}{\omega}\frac{(e^{j\omega}-e^{-j\omega})}{j2}=\frac{8}{\omega}\sin\omega=8\sin c\omega$

Or $X(\omega)=\mathcal{F}[4\Pi(t/\tau)]=4\tau\sin c(\omega\tau/2)=8\sin c\omega, \qquad (\tau=2)$

(b) $Y(\omega)=\int_{0}^{1}2e^{-j\omega t}dt+\int_{1}^{2}(1)e^{-j\omega t}dt=\frac{2}{-j\omega}e^{-j\omega t}\Big|_{0}^{1}+\frac{1}{-j\omega}e^{-j\omega t}\Big|_{1}^{2}$

$=\frac{1}{j\omega}(2-e^{-j\omega}-e^{-j2\omega})$

Or $y'(t)=2\delta(t)-\delta(t-1)-\delta(t-2)$

$j\omega Y(\omega)=(2-e^{-j\omega}-e^{-j2\omega})$

$Y(\omega)=\frac{1}{j\omega}(2-e^{-j\omega}-e^{-j2\omega})$

(c) $z''(t)=\delta(t+1)-2\delta(t)+\delta(t-1)$

$-\omega^2Z(\omega)=e^{j\omega}-2+e^{-j\omega}=2\cos\omega-2$

$Z(\omega)=\frac{-2}{\omega^2}(\cos\omega-1)$

But $\cos 2A=1-2\sin^2 A$

$Z(\omega)=\frac{4\sin^2\omega/2}{\omega}=\sin c^2(\omega/2)$

Or $z(t)=\Delta(t) \longrightarrow Z(\omega)=\sin c^2(\omega/2)$

Prob. 2.28

(a) Taking the first and second derivatives gives

$f''(t)=\delta(t+2)-4\delta(t-1)+3\delta(t-2)$

Taking the Fourier transform of each term:

$-\omega^2F(\omega)=e^{j2\omega}-4e^{-j\omega}+3e^{-j2\omega}$

$F(\omega)=\frac{1}{\omega^2}\left(4e^{-j\omega}-3e^{-j2\omega}-e^{j2\omega}\right)$

(b) $g(t)=2\Delta(t-1)-2\Pi[(t-3)/2]$

$G(\omega)=2e^{-j\omega}\sin c^2(\omega/2)-2e^{-j3}2\sin c\omega$

$G(\omega)=2e^{-j\omega}\sin c^2(\frac{\omega}{2})-4e^{-j3}\sin c\omega$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Prob. 2.29

Taking second derivative of the signal gives

$$h''(t) = A\delta'(t) - \frac{A}{\tau}\delta(t) + \frac{A}{\tau}\delta(t-\tau)$$

$$-\omega^2 H(\omega) = Aj\omega - \frac{A}{\tau}(1) + \frac{A}{\tau}e^{-j\omega\tau}$$

$$H(\omega) = \frac{A}{\omega^2\tau}\left[1 - j\omega\tau - e^{-j\omega\tau}\right]$$

Prob. 2.30

(a) Let $h(t) = 1 + m\cos\alpha t$

$$H(\omega) = 2\pi\delta(\omega) + m\pi\left[\delta(\omega+\alpha) + \delta(\omega-\alpha)\right]$$

$$F(\omega) = \frac{1}{2}\left[H(\omega+\beta) + H(\omega-\beta)\right]$$

$$= \pi\left[\delta(\omega+\beta) + \delta(\omega-\beta)\right] + \frac{m\pi}{2}[\delta(\omega+\alpha+\beta) + \delta(\omega+\alpha-\beta)$$

$$+\delta(\omega-\alpha+\beta) + \delta(\omega-\alpha-\beta)]$$

(b) $g(t) = \sin(t) = \dfrac{e^{jt} - e^{-jt}}{2j}, \quad 0 < t < 2\pi$

$$G(\omega) = \int_0^{2\pi} \frac{e^{jt} - e^{-jt}}{2j} e^{-j\omega t}dt = \frac{1}{2j}\int_0^{2\pi}(e^{jt(1-\omega)} - e^{-jt(1+\omega)})dt$$

$$= \frac{1}{2j}\left[\frac{e^{jt(1-\omega)}}{j(1-\omega)} + \frac{e^{-jt(1+\omega)}}{j(1+\omega)}\right]\Bigg|_0^{2\pi} = \frac{-1}{2}\left[\frac{e^{j2\pi(1-\omega)} - 1}{(1-\omega)} + \frac{e^{-j2\pi(1+\omega)} - 1}{(1+\omega)}\right]$$

But $e^{j2\pi} = \cos(2\pi) + j\sin 2\pi = 1$

$$G(\omega) = \frac{-1}{2}\left[\frac{e^{-j2\pi\omega} - 1}{(1-\omega)} + \frac{e^{-j2\pi\omega} - 1}{(1+\omega)}\right] = \frac{-1}{2}\frac{(e^{-j2\pi\omega} - 1)(2)}{(1-\omega^2)} = \frac{1 - e^{-j2\pi\omega}}{1-\omega^2}$$


Prob. 2.31

$$P(\omega) = \int_{-\tau/2}^{\tau/2} \cos\frac{\pi t}{2} e^{-j\omega t}dt = \frac{2\tau}{\pi}\frac{\cos(\omega\tau/2)}{1 - \left(\dfrac{\omega\tau}{\pi}\right)^2}$$

Prob. 2.32

(a) r(t) is sketched below.

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

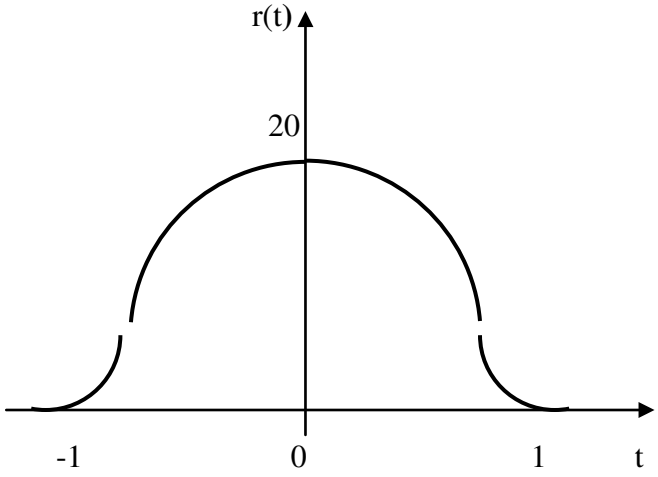

(b) $$R(\omega)=\int_{-\infty}^{\infty} r(t)e^{-j\omega t}dt=\int_{-1}^{1}10(1+\cos\pi t)e^{-j\omega t}dt$$

$$=10\frac{e^{-j\omega t}}{-j\omega}\bigg|_{-1}^{1}+5\int_{-1}^{1}(e^{j\pi t}+e^{-j\pi t})e^{-j\omega t}dt$$

$$=\frac{10}{-j\omega}(e^{-j\omega}-e^{j\omega})+\frac{5e^{j(\pi-\omega)t}}{j(\pi-\omega)}+\frac{5e^{-j(\pi+\omega)t}}{-j(\pi+\omega)}\bigg|_{-1}^{1}$$

$$=\frac{20}{\omega}\sin\omega+5\frac{(e^{j(\pi-\omega)}-e^{-j(\pi-\omega)})}{j(\pi-\omega)}-5\frac{(e^{-j(\pi+\omega)}-e^{j(\pi+\omega)})}{j(\pi+\omega)}$$

$$=20\sin c\omega+10\sin c(\pi-\omega)+10\sin c(\pi+\omega)$$

Prob. 2.33

(a) $$F_1(\omega)=\frac{1}{2}(e^{j\omega a}+e^{-j\omega a}),\qquad a=\pi/4$$

$$f_1(t)=\frac{1}{2\pi}\int_{-\infty}^{\infty}F_1(\omega)e^{j\omega t}d\omega=\frac{1}{2\pi}\int_{-\infty}^{\infty}\frac{1}{2}\left[e^{j\omega(t+a)}+e^{j\omega(t-a)}\right]d\omega$$

But $$\int_{-\infty}^{\infty}e^{j(t\pm a)\omega}d\omega=2\pi\delta(t\pm a)$$

$$f_1(t)=\frac{1}{4\pi}\,2\pi[\delta(t+a)-\delta(t-a)]=\frac{1}{2}[\delta(t+\pi/4)-\delta(t-\pi/4)]$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

(b) $f_2(t) = e^{-4(t-2)}u(t-2)$

(c) Let $\omega^2 = x$

$$F_3 = \frac{x+2}{x^2+3x+2} = \frac{x+2}{(x+2)(x+1)} = \frac{1}{x+1} = \frac{1}{\omega^2+1}$$

$$f_3(t) = \frac{1}{2}e^{-|t|}$$

Prob. 2.34

$$2\sin\pi\omega = \frac{2}{2j}[e^{j\pi\omega} - e^{-j\pi\omega}]$$

$$f(t) = \frac{1}{2\pi j}\int_{-1}^{1}[e^{j\pi\omega} - e^{-j\pi\omega}]e^{j\omega t}d\omega = \frac{1}{2\pi j}\int_{-1}^{1}[e^{j\omega(\pi+t)} - e^{-j\omega(\pi-t)}]d\omega$$

$$= \frac{1}{2\pi j}\left[\frac{e^{j\omega(\pi+t)}}{j(\pi+t)} + \frac{e^{-j\omega(\pi-t)}}{j(\pi-t)}\right]\Bigg|_0^1 = \frac{2j\sin t}{t^2-\pi^2}$$

Prob. 2.35

$$f(t) = \frac{1}{2\pi}\int_{-\infty}^{\infty}F(\omega)e^{j\omega t}d\omega$$

$$= \frac{1}{2\pi}\int_{-\omega_o-\tau}^{-\omega_o+\tau}\frac{A}{2}e^{j\omega t}d\omega + \frac{1}{2\pi}\int_{-\tau}^{\tau}Ae^{j\omega t}d\omega + \frac{1}{2\pi}\int_{\omega_o-\tau}^{\omega_o+\tau}\frac{A}{2}e^{j\omega t}d\omega$$

$$= \frac{A}{4\pi}\frac{e^{j\omega t}}{jt}\Bigg|_{-\omega_o-\tau}^{-\omega_o+\tau} + \frac{A}{2\pi}\frac{e^{j\omega t}}{jt}\Bigg|_{-\tau}^{\tau} + \frac{A}{4\pi}\frac{e^{j\omega t}}{jt}\Bigg|_{\omega_o-\tau}^{\omega_o+\tau}$$

$$= A\frac{e^{-j\omega_o t}}{2\pi t}\sin\tau t + \frac{A\tau}{\pi}\sin c(\tau t) + A\frac{e^{j\omega_o t}}{2\pi t}\sin\tau t$$

$$f(t) = \frac{A\tau}{\pi}\sin(\tau t)\left[1+\cos(\omega_o t)\right]$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Prob. 2.36

$$f(t)=\frac{1}{2\pi}\int_{-\infty}^{\infty}F(\omega)e^{j\omega t}d\omega=\frac{1}{2\pi}[\int_{-1}^{0}(-2\omega)e^{j\omega t}d\omega+\int_{0}^{1}(2\omega)e^{j\omega t}d\omega]$$

$$=\frac{1}{2\pi}\left[-\frac{2e^{j\omega t}(j\omega t-1)}{\omega^2}\Bigg|_{-1}^{0}+\frac{2e^{j\omega t}(j\omega t-1)}{\omega^2}\Bigg|_{0}^{1}\right]$$

$$=\frac{1}{\pi\omega^2}\left[1-jte^{-jt}-e^{-jt}+jte^{jt}-e^{jt+1}\right]$$

$$=\frac{1}{\pi\omega^2}\left[2-2t\sin t-2\cos t\right]$$

Prob. 2.37

(a) Let $h(t)=g(-2t)$

$$H(\omega)=\frac{1}{2}\frac{20}{(1-\frac{j\omega}{2})}=\frac{20}{2-j\omega}$$

(b) Let $f(t)=tg(t)$

$$F(\omega)=j\frac{dG(\omega)}{d\omega}=20j(-j)(1+j\omega)^{-2}=\frac{20}{(1+j\omega)^2}$$

Let $h(t)=(t+1)g(t+1)u(t+1)=f(t+1)u(t+1)$

$$H(\omega)=e^{j\omega}F(\omega)=\frac{20e^{j\omega}}{(1+j\omega)^2}$$

(c) $\frac{dg}{dt} \Leftrightarrow \frac{20j\omega}{1+j\omega}$

$$t\frac{dg}{dt}=j\frac{d}{d\omega}\left(\frac{20j\omega}{1+j\omega}\right)=j20\frac{[(1+j\omega)j-j\omega(j)]}{(1+j\omega)^2}=-\frac{20}{(1+j\omega)^2}$$

(d) Let $y(t)=g(t)\cos\pi t$

$$Y(\omega)=\frac{1}{2}[G(\omega+\pi)+G(\omega-\pi)]=\left[\frac{10}{1+j(\omega+\pi)}+\frac{10}{1+j(\omega-\pi)}\right]$$

Prob. 3.38

(a) Let $f(t)=x(t)e^{-j2t}$

$$F(\omega)=X(\omega+2)=\frac{4+j(\omega+2)}{-(\omega+2)^2+j2(\omega+2)+2}$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

(b) Let $g(t) = x(t)\sin\pi(t-1) = x(t)[\sin\pi t\cos\pi - \cos\pi t\sin\pi]$

Since $\cos\pi$=-1 and $\sin\pi$=0,

$g(t) = -x(t)\sin\pi t$

$$G(\omega) = -\frac{1}{2}\left[X(\omega+\pi) - X(\omega-\pi)\right]$$

$$= \frac{\frac{1}{2}\left[4 + j(\omega-\pi)\right]}{-(\omega-\pi)^2 + j2(\omega-\pi)+3} - \frac{\frac{1}{2}\left[4 + j(\omega+\pi)\right]}{-(\omega+\pi)^2 + j2(\omega+\pi)+3}$$

(c) Let $h(t) = x(t) * \delta(t-2) = x(t-2)$

$$H(\omega) = e^{-j2\omega}X(\omega) = \frac{(4+j\omega)e^{-j2\omega}}{-\omega^2 + j2\omega + 3}$$

(d) Let $y(t) = \int_{-\infty}^{t} x(\tau)d\tau$

$$Y(\omega) = \frac{X(\omega)}{j\omega} + \pi X(0)\delta(\omega) = \frac{4+j\omega}{j\omega(-\omega^2 + j2\omega + 3)} + \frac{4}{3}\pi\delta(\omega)$$

Prob. 2.39

(a) $u(t+\tau) - u(t-\tau) \quad \Leftrightarrow \quad \frac{2\sin\omega\tau}{\omega}$

$$\frac{\sin\omega\tau}{\omega\tau} \quad \Leftrightarrow \quad \frac{1}{2\tau}\left[u(t+\tau) - u(t-\tau)\right]$$

Let τ=1

$$\frac{\sin\omega}{\omega} \quad \Leftrightarrow \quad \frac{1}{2}\left[u(t+1) - u(t-1)\right]$$

$$\mathcal{F}\left[\frac{\sin t}{t}\right] = \frac{1}{2}2\pi\left[u(-\omega+1) - u(-\omega-1)\right]$$

$$\int_{-\infty}^{\infty}\frac{\sin^2 t}{t^2}dt = \frac{1}{2\pi}\int_{-\infty}^{\infty}\pi^2\left[u(-\omega+1) - u(-\omega-1)\right]^2 d\omega$$

$$= \frac{\pi}{2}\Big|_{-\omega-1}^{-\omega+1} = \frac{\pi}{2}(2) = \pi$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

(b) Let $f(t) = \dfrac{4}{t^2+4}$

$$\frac{2a}{t^2+a^2} \quad \Leftrightarrow \quad 2\pi e^{-a|\omega|}, \qquad a = 2$$

$$f^2(t) = \frac{16}{(t^2+4)^2}$$

$$\int_{-\infty}^{\infty} f^2(t)dt = \frac{1}{2\pi}\int_{-\infty}^{\infty} |F(\omega)|^2 \, d\omega$$

$$\int_{-\infty}^{\infty} \frac{dt}{(t^2+4)^2} = \frac{1}{16}\frac{1}{2\pi}\int_{-\infty}^{\infty} 4\pi^2 e^{-4|\omega|}d\omega = \frac{\pi}{4}\int_{0}^{\infty} e^{-4\omega}d\omega$$

$$= \frac{\pi}{4}\frac{e^{-4\omega}}{-4} = \frac{\pi}{16}$$

Prob. 2.40

(a) $X(\omega) = \dfrac{1}{a+j\omega}, \qquad a = 3$

$$|X(\omega)|^2 = \frac{1}{a^2+\omega^2}$$

$$E = \frac{1}{2\pi}\int_{-\infty}^{\infty} \frac{d\omega}{a^2+\omega^2} = \frac{2}{2\pi}\frac{1}{3}\tan^{-1}\frac{\omega}{3}\Big|_0^{\infty} = \frac{2}{2\pi}\frac{1}{3}\frac{\pi}{2} = \frac{1}{6} = 0.1667 \text{ W}$$

(b) $Y(\omega) = 4\sin c\left(\dfrac{\omega 4}{2}\right) = 4\sin c(2\omega)$

$$E = \frac{1}{2\pi}\int_{-\infty}^{\infty} 16\sin c^2(2\omega)d\omega$$

But $\displaystyle\int \frac{\sin^2 x}{x^2}dx = \int \sin c^2 x dx = \frac{\pi}{2}$

Let $2\omega = x \longrightarrow d\omega = \dfrac{dx}{2}$

$$E = \frac{16}{2\pi}\int \sin c^2 x \frac{dx}{2} = \frac{8}{2\pi}\frac{\pi}{2} = 2$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Prob. 2.41

$$F(\omega) = 5(2)\sin c\left(\frac{\omega 2}{2}\right) = 10\sin c\omega$$

Applying the time shifting property,

$$G(\omega) = F(\omega)e^{j\omega 2} + F(\omega)e^{-j\omega 2} = 10\sin c\omega\left(e^{j\omega 2} + e^{-j\omega 2}\right)$$

$$G(\omega) = 20\cos(2\omega)\sin c\omega$$

Prob. 2.42

$$H(\omega) = \frac{V_o(\omega)}{V_i(\omega)} = \frac{j\omega RC}{1 + j\omega RC - \omega^2 LC}$$

$H(0) = 0, \quad H(\infty) = 0 \quad \longrightarrow \quad$ a bandpass filter

Prob. 2.43

$$E_x = \int_{-\infty}^{\infty} x^2(t)dt = \int_0^{\infty} e^{-200\pi t}dt = \frac{1}{200\pi}$$

$$x(t) = e^{-100\pi t} \quad \longrightarrow \quad X(\omega) = \frac{1}{100\pi + j\omega}$$

$$Y(\omega) = H(\omega)X(\omega) = \frac{1}{100\pi + j\omega}, \quad -B < \omega < B$$

$$E_{out} = \frac{1}{3}E_x = \frac{1}{600\pi} = \frac{1}{2\pi}\int_{-B}^{B} |Y(\omega)|^2 \, d\omega = \frac{1}{\pi}\int_0^B \frac{d\omega}{\pi^2 10^4 + \omega^2}$$

$$\frac{1}{600\pi} = \frac{1}{\pi}\left(\frac{1}{100\pi}\tan^{-1}\frac{B}{100\pi}\right) \quad \longrightarrow \quad \frac{B}{100\pi} = \tan\frac{\pi}{6}$$

$$B = 100\pi\tan\frac{\pi}{6} = 5,441.4 \text{ rad/s}$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Prob. 5.44

$$H(s)=\frac{\omega_c^3}{s^3+2\omega_c s+2\omega_c^2+\omega_c^3}=\frac{1}{s^3+2s^2+2s+1}=\frac{1}{(s+1)(s^2+s+1)}$$

$$H(s)=\frac{A}{s+1}+\frac{Bs+C}{s^2+s+1}$$

$$1=A(s^2+s+1)+B(s^2+s)+C(s+1)$$

Equating coefficients,

s^2: $\quad 0=A+B \longrightarrow B=-A$

s: $\quad 0=A+B+C=0+C \longrightarrow C=0$

constant: $\quad 1=A+C \longrightarrow A=1, B=-1$

$$H(s)=\frac{1}{s+1}-\frac{s}{s^2+s+1}=\frac{1}{s+1}-\frac{s}{(s+1/2)^2+\left(\frac{\sqrt{3}}{2}\right)^2}$$

$$=\frac{1}{s+1}-\frac{(s+1/2)}{(s+1/2)^2+\left(\frac{\sqrt{3}}{2}\right)^2}+\frac{1/2}{(s+1/2)^2+\left(\frac{\sqrt{3}}{2}\right)^2}$$

$$=\frac{1}{s+1}-\frac{(s+1/2)}{(s+1/2)^2+\left(\frac{\sqrt{3}}{2}\right)^2}+\frac{1/2}{\frac{\sqrt{3}}{2}}\frac{\frac{\sqrt{3}}{2}}{(s+1/2)^2+\left(\frac{\sqrt{3}}{2}\right)^2}$$

$$h(t)=e^{-t}-e^{-t/2}\cos\left(\frac{\sqrt{3}}{2}t\right)+\frac{1}{\sqrt{3}}e^{-t/2}\sin\left(\frac{\sqrt{3}}{2}t\right)$$

Prob. 2.45

This is H(s) for third-order Butterworth filter. Hence,

$$H(s)=\frac{1}{s^3+2s^2+2s+1}$$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Prob. 2.46

$$Z_1 = 1 + sL, Z_2 = \frac{1}{sC} \| 1 = \frac{\frac{1}{sC}}{1 + \frac{1}{sC}} = \frac{1}{1 + sC}$$

$$V_o = \frac{Z_2}{Z_1 + Z_2} V_s$$

$$H = \frac{V_o}{V_s} = \frac{Z_2}{Z_1 + Z_2} = \frac{\frac{1}{1 + sC}}{1 + sL + \frac{1}{1 + sC}} = \frac{1}{s^2 LC + s(L + C) + 2}$$

$$= \frac{1/LC}{s^2 + s(1/C + 1/L) + 2/LC}$$

Comparing this with

$$H(s) = \frac{k}{s^2 + 1.414\omega_c s + \omega_c^2}$$

we get

$$k = 1/LC, \quad \omega_c^2 = \frac{2}{LC}, \qquad 1.414\omega_c = \frac{1}{C} + \frac{1}{L},$$

$$\frac{1}{C} = \frac{L\omega_c^2}{2} = 50L$$

$$14.14 = 50L + \frac{1}{L} \longrightarrow 50L^2 - 14.14L + 1 = 0$$

$$L = \frac{14.14 \pm \sqrt{14.14^2 - 4(50)(1)}}{100} \| 0.1414$$


$$L = 141.4 \text{ mH}, \quad C = \frac{1}{50L} = 0.1414 = 141.4 \text{ mF}$$

Prob. 2.47

(a) The MATLAB code with the plot is presented below.


```
t=-2:0.1:2;
x = t.*t -2*t +3;
plot(t,x)
```

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

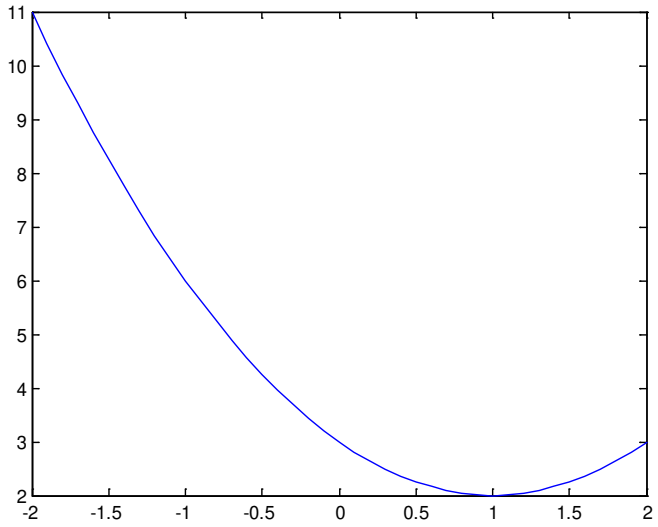

(b) The MATLAB codes with the plot is shown below.

```
t=-pi:pi/40:pi;
y = 4*cos(2*pi*t - 12*pi/180) + 3*sin(2*pi*t);
plot(t,y)
```

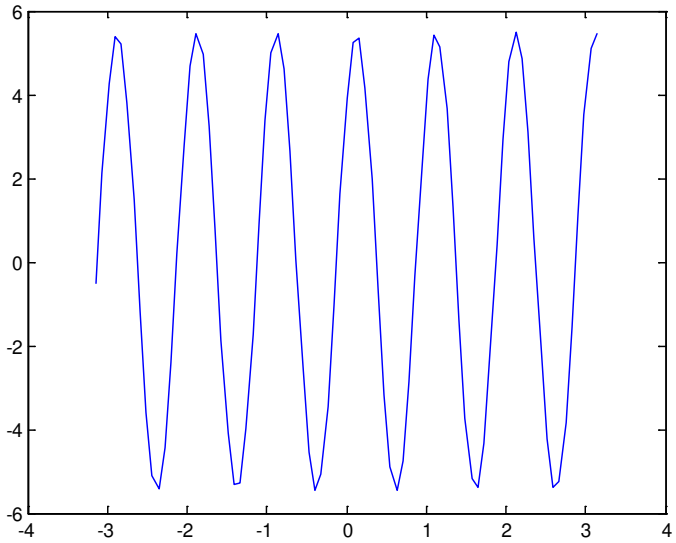


(c) The MATLAB code with the plot is shown below.

```
t= 0:0.05:5;
z = 10*( 1 - exp(-2*t));
```

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual


```
plot(t,z)
```

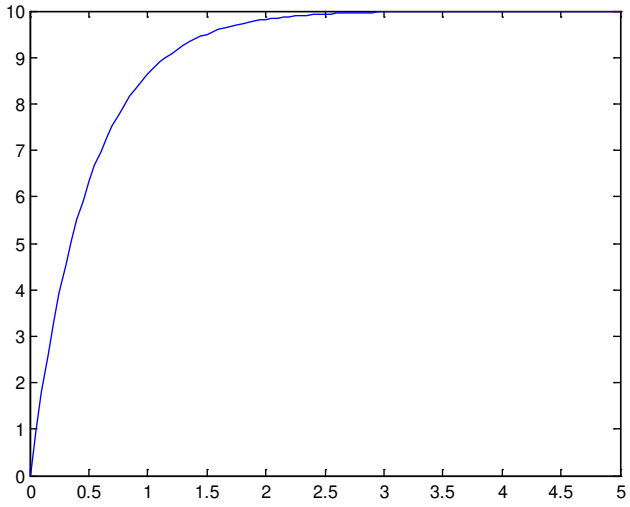

Prob. 2.48

(a) The MATLAB with the plot is shown below.

```
w= -5:0.1:5;
F = 1./sqrt( 4 + w.*w);
plot(w,F)
```

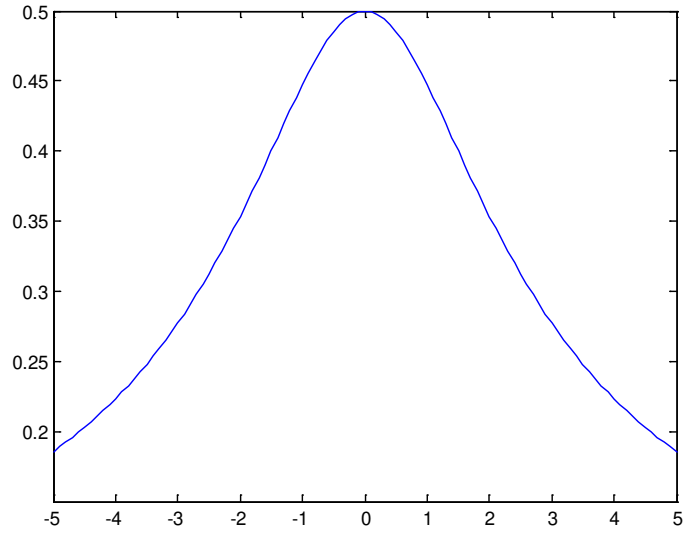


(b) The MATLAB with the plot is shown below.

```
w= -4:0.1:4;
G = 10*( sin(5*w).*sin(5*w) )./(25*w.*w);
```

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

```
plot(w,G)
```

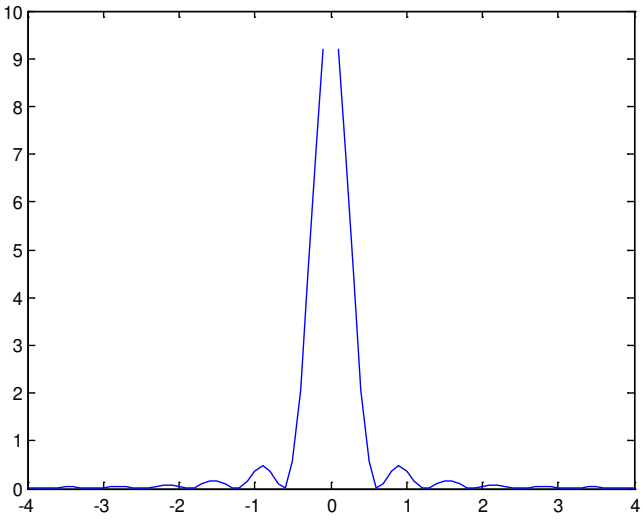


Prob. 4.49

The MATLAB code with the plots is presented below.

```
w= -5:0.1:5;
a=pi*w
F =  10*j.*exp(-j*a).*sin(a) ./(1-w.*w);
FM = abs(F);
FP = angle(F)*180/pi;
subplot(2,1,1); plot(w,FM);
xlabel('\omega'); ylabel('magnitude');
subplot(2,1,2); plot(w,FP);
xlabel('\omega'); ylabel('phase');
```

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

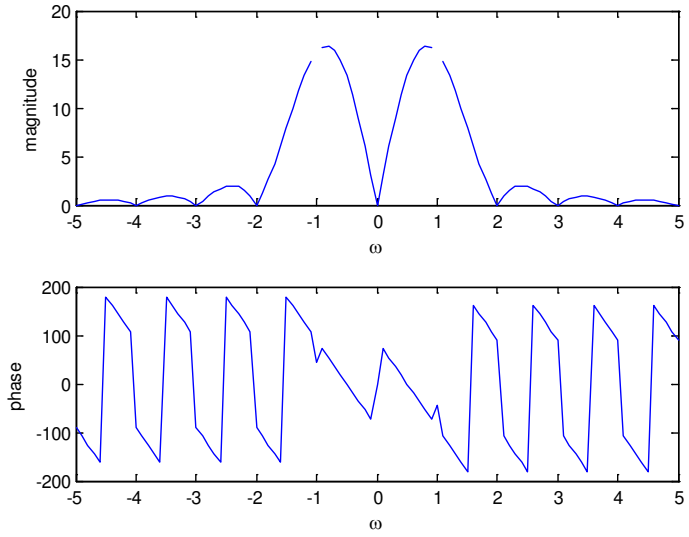

Prob. 2.50

From Prob. 2.13,


$$a_0 = 3.75, a_n = \frac{-5}{n\pi}\sin\frac{n\pi}{2}, b_n = \frac{5}{n\pi}\left(1-2\cos n\pi+\cos\frac{n\pi}{2}\right)$$

$$fN = 3.75+\sum_{n=1}^{\infty} a_n\cos(n\omega_0 t)+b_n\sin(n\omega_o t), \qquad \omega_o = \frac{\pi}{2}$$

The MATLAB code with the plot of partial sum is shown below.

```
N=15;
t = -2:0.01:2;
w = pi/2
f0=3.75;
fN = f0*ones(size(t));
for n=1:N
    fac=5/(pi*n);
    an= -fac*sin(w*n);
    bn=fac*(1 - 2*cos(n*pi) + cos(w*n));
    fN = fN +an*cos(n*w*t) + bn*sin(n*w*t);
end
plot(t,fN)
```

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

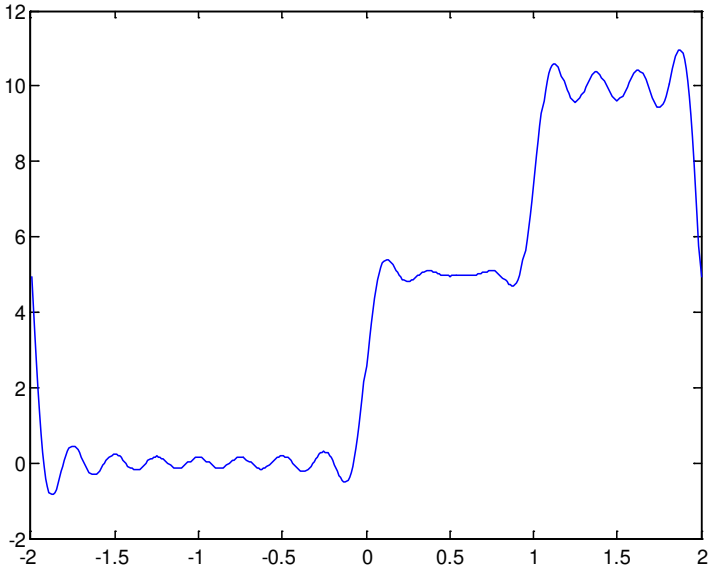

Prob. 2.51


From Problem 2.14,

$$f(t) = \frac{1}{\pi} + \frac{1}{2}\cos\frac{\pi}{2}t - \frac{2}{\pi}\sum_{n=even}^{\infty}\frac{(-1)^{n/2}}{(n^2-1)}\cos\frac{n\pi}{2}t$$

The MATLAB code with the plot is shown below.

```
N = 25;
t = -2:0.01:2;
w = pi/2;
f0 = 1/pi;
fN = f0*ones(size(t));
fN = fN + 0.5*cos(w*t)
fac=-2/pi;
for k=1:N
    n=2*k;
    fac1= (-1)^(n/2);
    fac2 = n^2 -1;
    fN = fN +fac*fac1*cos(n*w*t)/fac2;
end
plot(t,fN)
```

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

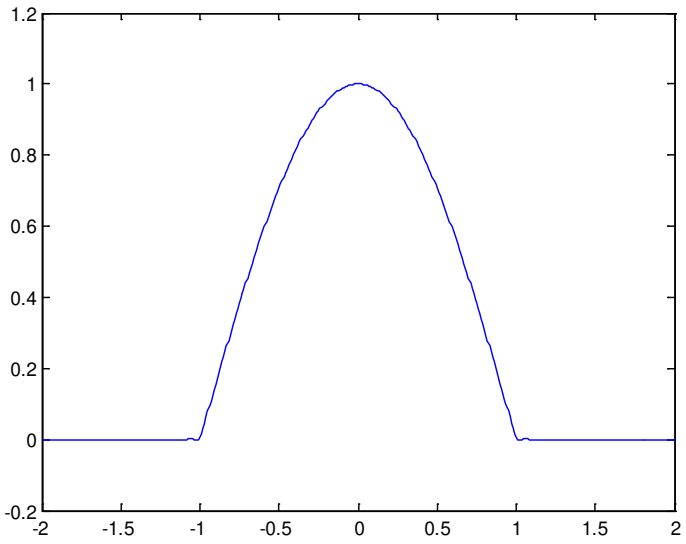

Prob. 2.52

From Problem 2.20,


$$a_n = \frac{16}{n^2\pi^2}\left(\cos\frac{n\pi}{2} - 1\right) + \frac{16}{n\pi}\sin\frac{n\pi}{2}$$

$$f(t) = 3 + \sum_{n=1}^{\infty} a_n \cos\frac{n\pi}{2}t$$

The MATLAB code with the plot of partial sum is shown below.

```
N = 31;
t = 0:0.01:2;
w = pi/2;
f0 = 3;
fN = f0*ones(size(t));
for n=1:N
    fac1= 16*( cos(w*n) -1)/(n*n*pi*pi);
    fac2 = 16*sin(w*n)/(n*pi);
    an=fac1 + fac2;
    fN = fN + an*cos(n*w*t);
end
plot(t,fN)
```

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

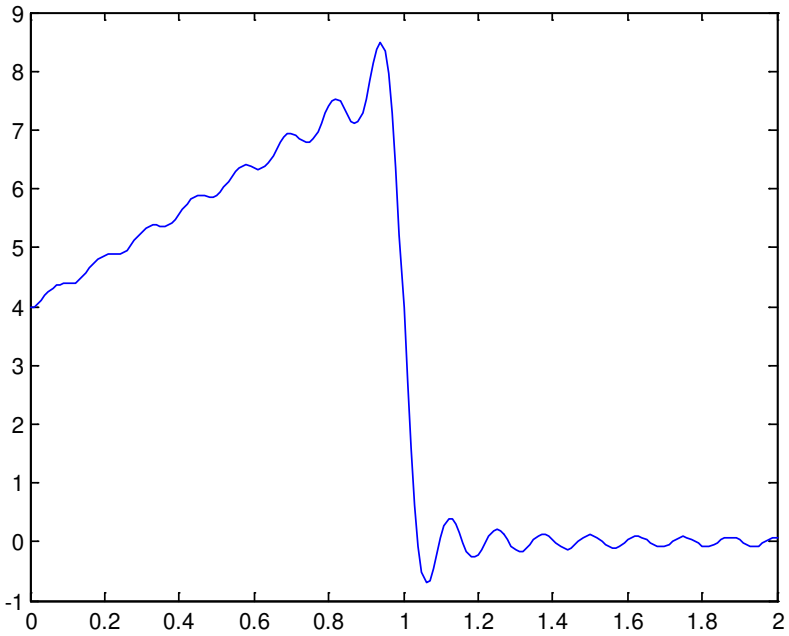

Prob. 2.53

The MATLAB code is shown below.

```
den = [ 1   3.236   5.236   5.236 3.236 1];
roots(den)

ans =

  -0.3090 + 0.9510i
  -0.3090 - 0.9510i
  -1.0000 + 0.0000i
  -0.8090 + 0.5879i
  -0.8090 - 0.5879i
```


Prob. 2.54

The MATLAB code with the plot is shown below.

```
[z,p,k]=buttap(6);  %  returns the zeros, poles, and constant k of the
% 6th-order Butterworth  filter
  num=k*poly(z);  % forms the numerator
  den=poly(p);      %  forms the denominator
  [mag,phase,w]=bode(num,den);  % returns magnitude, phase (in
%degrees), and  frequency vector  w (automatically)
  semilogx(w,20*log10(abs(mag)))
% plot(w,mag)    % plots the magnitude verse w
  title('Magnitude  of the frequency response')
```

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

```
xlabel('Omega')
ylabel('Magnitude')
```

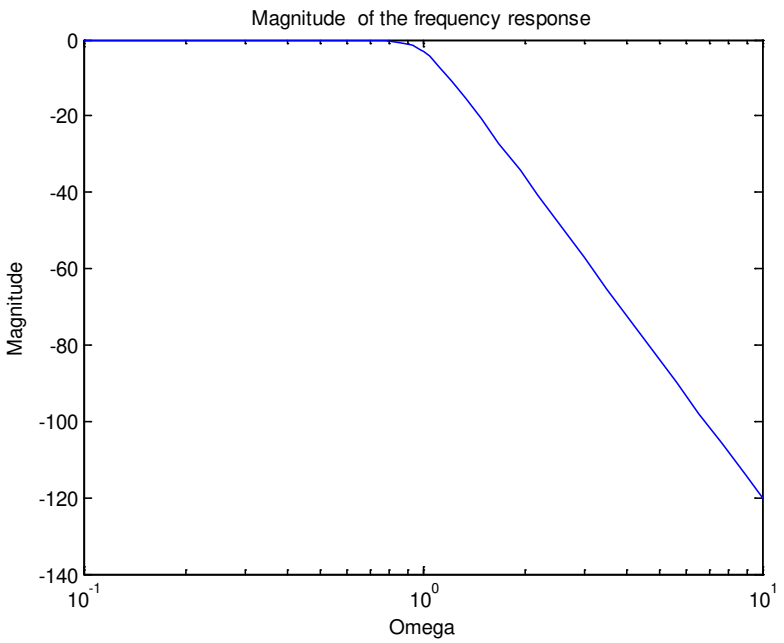

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual

Chapter 3

3.1 (a) $L_{\min} = 0.1\lambda = 0.1\dfrac{c}{f_m} = 0.1\dfrac{3\times10^8 \text{ m/s}}{30\times10^3 \text{ Hz}}$

$L_{\min} = 10^3 \text{ m or } 1 \text{ km}$

(b) $f_c = 100 f_m = 100\times30\times10^3 \text{ Hz} = 3\times10^6 \text{ Hz}$

$L_{\min} = 0.1\lambda = 0.1\dfrac{c}{f_c} = 0.1\dfrac{3\times10^8 \text{ m/s}}{3\times10^6 \text{ Hz}} = 10 \text{ m}$

3.2 (a) For $f_c = 550$ kHz,

$H_{\min} = 0.1\lambda = 0.1\dfrac{c}{f_c} = 0.1\dfrac{3\times10^8 \text{ m/s}}{550\times10^3 \text{ Hz}} = 54.54 \text{ m}$

(b) For $f_c = 1600$ kHz,

$H_{\min} = 0.1\lambda = 0.1\dfrac{c}{f_c} = 0.1\dfrac{3\times10^8 \text{ m/s}}{1600\times10^3 \text{ Hz}} = 18.75 \text{ m}$

3.3 $A_c = 10$; Modulation index $= \mu = \dfrac{M_p}{A_c} = \dfrac{A_m}{A_c}$

For waveform sketches, $A_{\max} = A_c + A_m$; $A_{\min} = A_c - A_m$

For From Figure 3.35 (a), $A_{\max} = A_c + A_{\text{m}} = 8$; $A_{\min} = A_c - A_{\text{m}} = 2$

$\therefore A_c = \dfrac{1}{2}(A_{\max} + A_{\min}) = \dfrac{1}{2}(8+2) = 5$; $A_m = \dfrac{1}{2}(A_{\max} - A_{\min}) = \dfrac{1}{2}(8-2) = 3$

$\mu = \dfrac{A_m}{A_c} = \dfrac{3}{5} = 0.6 \text{ or } 60\%$

(a) $\mu = \dfrac{4}{10} = 0.4$

Sketch is similar to Fig. 3.2 (a) but $A_{\max} = 10+4 = 14$ and $A_{\min} = 10-4 = 6$.

(b) For $A_m = 10$, $\mu = \dfrac{10}{10} = 1.0$ (100% modulation, not recommended!)

Sketch is similar to Fig. 3.2 (b) but $A_{\max} = 10+10 = 20$ and $A_{\min} = 10-10 = 0$

Principles of Modern Communication Systems 1st edition Agbo Solutions Manual