System Dynamics 4th edition Palm Solutions Manual

SKU: 9780078140051-SOLUTIONS

Solutions Manual ©

to accompany

System Dynamics, Fourth Edition

by

William J. Palm III

University of Rhode Island

Solutions to Problems in Chapter One

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.1 $W = mg = 3(32.2) = 96.6$ lb.

1.2 $m = W / g = 100 / 9.81 = 10.19$ kg. $W = 100(0.2248) = 22.48$ lb.
$m = 10.19(0.06852) = 0.698$ slug.

1.3 $d = (50 + 5/12)(0.3048) = 15.37$ m.

1.4 $d = 3(100)(0.3048) = 91.44$ m

1.5 $d = 100(3.281) = 328.1$ ft

1.6 $d = 50(3600)/5280 = 34.0909$ mph

1.7 $v = 100(0.6214) = 62.14$ mph

1.8 $n = 1/\left[60\left(1.341 \times 10^{-3}\right)\right] = 12.43$, or approximately 12 bulbs.

1.9 $5(70 - 32)/9 = 21.1^{\circ}$ C

1.10 $9(30)/5 + 32 = 86^{\circ}$ F

1.11 $\omega = 3000(2\pi)/60 = 314.16$ rad/sec. Period $P = 2\pi/\omega = 60/3000 = 1/50$ sec.

1.12 $\omega = 5$ rad/sec. Period $P = 2\pi/\omega = 2\pi/5 = 1.257$ sec. Frequency $f = 1/P = 5/2\pi =$ 0.796 Hz.

1.13 Speed $= 40(5280)/3600 = 58.6667$ ft/sec. Frequency $= 58.6667/30 = 1.9556$ times per second.

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.14 $x = 0.005\sin 6t$, $\dot{x} = 0.005(6)\cos 6t = 0.03\cos 6t$. Velocity amplitude is 0.03 m/s. $\ddot{x} = -6(0.03)\sin 6t = -0.18\sin 6t$. Acceleration amplitude is 0.18 m/s^2. Displacement, velocity and acceleration all have the same frequency.

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.15 Physical considerations require the model to pass through the origin, so we seek a model of the form $f = kx$. A plot of the data shows that a good line drawn by eye is given by $f = 0.2x$. So we estimate k to be 0.2 lb/in.

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.16 The script file is

```
x = [0:0.01:1];
subplot(2,2,1)
plot(x,sin(x),x,x),xlabel('x (radians)'),ylabel('x and sin(x)'),...
gtext('x'),gtext('sin(x)')
subplot(2,2,2)
plot(x,sin(x)-x),xlabel('x (radians)'),ylabel('Error: sin(x) - x')
subplot(2,2,3)
plot(x,100*(sin(x)-x)./sin(x)),xlabel('x (radians)'),...
ylabel('Percent Error'),grid
```

The plots are shown in the figure.

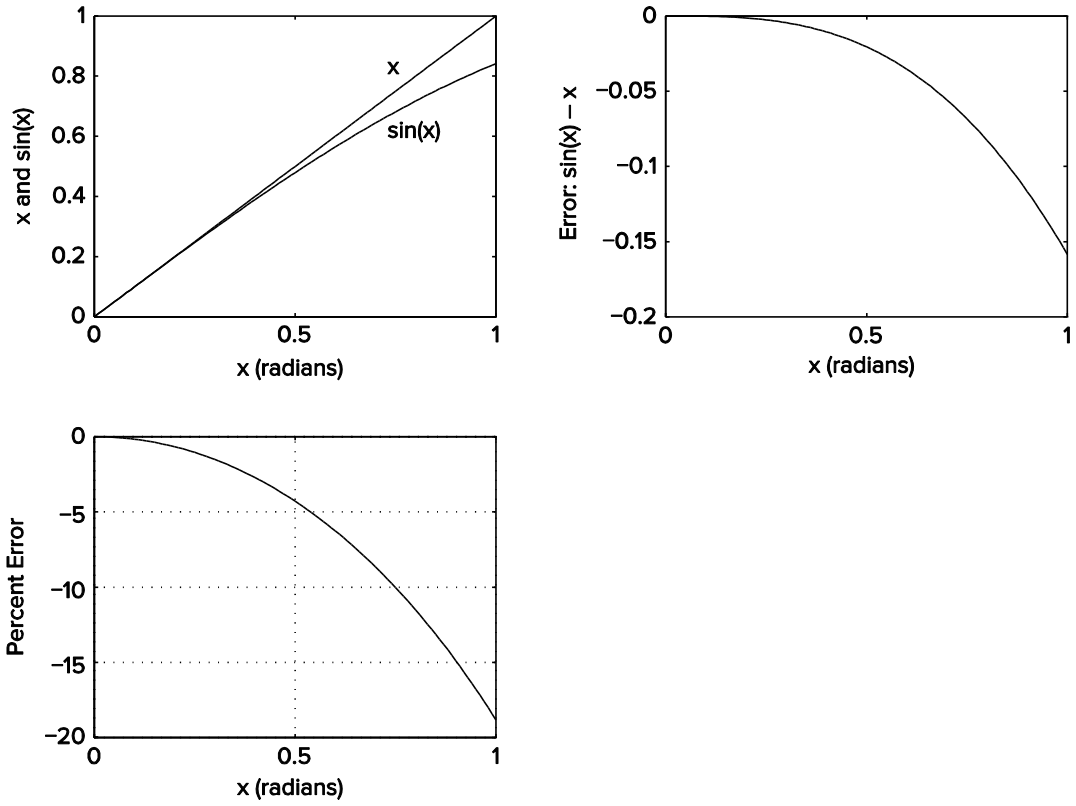


Figure : for Problem 1.16.

From the third plot we can see that the approximation $\sin x \approx x$ is accurate to within 5% if $|x| \leq 0.5$ radians.

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.17 For θ near $\pi/4$,

$$f(\theta) \approx \sin\frac{\pi}{4} + \left(\cos\frac{\pi}{4}\right)\left(\theta - \frac{\pi}{4}\right)$$

For θ near $3\pi/4$,

$$f(\theta) \approx \sin\frac{3\pi}{4} + \left(\cos\frac{3\pi}{4}\right)\left(\theta - \frac{3\pi}{4}\right)$$

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.18 For θ near $\pi/3$,

$$f(\theta) \approx \cos\frac{\pi}{3} - \left(\sin\frac{\pi}{3}\right)\left(\theta - \frac{\pi}{3}\right)$$

For θ near $2\pi/3$,

$$f(\theta) \approx \cos\frac{2\pi}{3} - \left(\sin\frac{2\pi}{3}\right)\left(\theta - \frac{2\pi}{3}\right)$$

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.19 For h near 25,

$$f(h) \approx \sqrt{25} + \frac{1}{2\sqrt{25}}(h-25) = 5 + \frac{1}{10}(h-25)$$

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.20 For r near 5,

$$f(r) \approx 5^2 + 2(5)(r-5) = 25 + 10(r-5)$$

For r near 10,

$$f(r) \approx 10^2 + 2(10)(r-10) = 100 + 20(r-10)$$

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.21 For h near 16,

$$f(h) \approx \sqrt{16} + \frac{1}{2\sqrt{16}}(h-16) = 4 + \frac{1}{8}(h-16)$$

and $f(h) \geq 0$ if $h > -16$.

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.22 Construct a straight line the passes through the two endpoints at $p=0$ and $p=900$. At $p=0$, $f(0)=0$. At $p=900$, $f(900)=0.002\sqrt{900}=0.06$. This straight line is

$$f(p)=\frac{0.06}{900}p=\frac{1}{15{,}000}p$$

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.23 a)

$$4\int_2^x dx = 3\int_0^t t\,dt$$

$$x(t) = 2 + \frac{3}{8}t^2$$

b)

$$5\int_3^x dx = 2\int_0^t e^{-4t}\,dt$$

$$x(t) = 3.1 - 0.1e^{-4t}$$

c) Let $v = \dot{x}$.

$$3\int_7^v dv = 5\int_0^t t\,dt$$

$$v(t) = \frac{dx}{dt} = 7 + \frac{5}{6}t^2$$

$$\int_2^x dx = \int_0^t \left(7 + \frac{5}{6}t^2\right) dt$$

$$x(t) = 2 + 7t + \frac{5}{18}t^3$$

d) Let $v = \dot{x}$.

$$4\int_2^v dv = 7\int_0^t e^{-2t}\,dt$$

$$v(t) = \frac{23}{8} - \frac{7}{8}e^{-2t}$$

$$\int_4^x dx = \int_0^t \left(\frac{23}{8} - \frac{7}{8}e^{-2t}\right) dt$$

$$x(t) = \frac{57}{16} + \frac{23}{8}t + \frac{7}{16}e^{-2t}$$

e) $\dot{x} = C_1$, but $\ddot{x}(0) = 5$, so $C_1 = 5$. $x = 5t + C_2$, but $x(0) = 2$, so $C_2 = 2$. Thus $x = 5t + 2$.

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.24 From (1.4.4),

$$\alpha = \frac{(10)^2}{2(2)(1000)} = 0.025$$

$$f = (\alpha + 1)mg = 1.025(5000)(2) = 10{,}250 \text{ N}$$

From (1.4.2),

$$t_f = \frac{v_0}{\alpha g} = \frac{10}{0.025(2)} = 200 \text{ s}$$

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.25 Let $\dot{h}(0) = b = -v_0$.

$$\dot{h}(t_f) = 0 = at_f - v_0$$

so

$$a = \frac{v_0}{t_f}$$

Thus

$$h(t) = \frac{a}{2}t^2 - v_0 t + h_0 = \frac{v_0}{2t_f}t^2 - v_0 t + h_0$$

and

$$h(t_f) = \frac{v_0}{2t_f}t_f^2 - v_0 t_f + h_0 = 0$$

which gives

$$t_f = \frac{2h_0}{v_0}$$

and

$$a = -\frac{v_0}{t_f} = \frac{v_0^2}{2h_0}$$

Also, since $\ddot{h} = a$,

$$f = m(\ddot{h} + g) = m(a + g) = m\left(\frac{v_0^2}{2h_0} + g\right)$$

© *McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.*

System Dynamics 4th edition Palm Solutions Manual

1.26 We require that $\dot{h}(t_f) = -v_f$. From (1.4.3),

$$h(t) = \alpha g \frac{t^2}{2} - v_0 t + h_0$$

$$\dot{h} = \alpha g t - v_0$$

$$\dot{h}(t_f) = \alpha g t_f - v_0 = -v_f$$

so

$$t_f = \frac{v_0 - v_f}{\alpha g} = (v_0 - v_f)\frac{2h_0}{v_0^2}$$

Equation (1.4.4) stays the same, so the thrust stays the same as (1.4.6):

$$f = (\alpha + 1)mg$$

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.27 a.

$$f = m\left(\ddot{h} + g\right) = m\left(2at + b + g\right)$$

Find a and b.

$$\dot{h}\left(t_f\right) = at_f^2 + bt_f - v_0 = 0 \quad (1)$$

$$h(t) = \frac{a}{3}t^3 + \frac{b}{2}t^2 - v_0 t + h_0$$

and

$$h(t) = \frac{a}{3}t_f^3 + \frac{b}{2}t_f^2 - v_0 t_f + h_0 = 0 \quad (2)$$

Solve (1) and (2) for a and b:

$$a = \frac{6h_0 - 3v_0 t_f}{t_f^3}$$

$$b = \frac{4v_0}{t_f} - \frac{6h_0}{t_f^2}$$

Thus t_f is free to be chosen.

b. 1.

$$a = \frac{6(500) - 3(5)(200)}{(200)^3} = 0$$

$$b = \frac{4(5)}{200} - \frac{6(500)}{(200)^2} = 0.025$$

$$f = 5062.5$$

2.

$$a = \frac{6(500) - 3(5)(100)}{(100)^3} = 0.0015$$

$$b = \frac{4(5)}{100} - \frac{6(500)}{(100)^2} = -0.1$$

$$f = 2500(0.003t + 1.9) = 7.5t = 4750$$

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.28 The total inertia is $I = I_m + I_S + I_L = 0.005 + 0.002 + 0.008 = 0.015$. From Figure 1.5.4 we obtain the required angular acceleration from the slope of the velocity curve. This gives

$$\dot{\omega} = \begin{cases} \dfrac{200}{0.1} = 2000 & 0 \le t \le 0.1 \\ 0 & 0.1 < t < 4.5 \\ -\dfrac{200}{0.1} = -2000 & 4.5 \le t \le 4.6 \end{cases}$$

Thus the required torque is

$$T = I\dot{\omega} = \begin{cases} 30 & 0 \le t \le 0.1 \\ 0 & 0.1 < t < 4.5 \\ -30 & 4.5 \le t \le 4.6 \end{cases}$$

So the maximum required torque is 30 N · m.

The rms average torque is calculated as follows:

$$T_{rms} = \sqrt{\frac{1}{4.6}\left[(30)^2(0.1) + (0)^2(4.4) + (-30)^2(0.1)\right]} = 6.255 \text{ N} \cdot \text{m}$$

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.29 The equation of motion is now

$$I\dot{\omega} = T - T_F \qquad \omega > 0$$

Thus

$$T = I\dot{\omega} + T_F = \begin{cases} 30+3=33 & 0 \le t \le 0.1 \\ 3 & 0.1 < t < 4.5 \\ -30+3=-27 & 4.5 \le t \le 4.6 \end{cases}$$

So the maximum required torque is 33 and the rms torque is

$$T_{rms} = \sqrt{\frac{1}{4.6}\left[(33)^2(0.1)+(3)^2(4.4)+(-27)^2(0.1)\right]} = 6.938 \ \text{N}\cdot\text{m}$$

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.30 The total load displacement is given as $\theta_f = 10\pi$ rad. We also have $t_f = 0.5$ s and a slew time of $t_2 - t_1 = 0.4$ s. Using a symmetrical velocity profile requires that $t_1 = 0.05$ and $t_2 = 0.45$. The total inertia is $I = 6\times10^{-3} + 5\times10^{-4} + 10^{-3} = 7.5\times10^{-3}$. From Table 1.5.1 we have $\omega_{max} = 10\pi / 0.4 = 69.813$ rad/s or $60\omega_{max} / (2\pi) = 666.667$ rpm. So the load will rotate at that speed for 0.4 s.

We are given that $T_d = 2$ N·m. So the maximum torque required is $T_{max} = 12.4720$ N·m and the rms average torque is $T_{rms} = 5.0924$ N·m.

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.31 The total load displacement is given as $\theta_f = 4\pi$ rad. We also have $t_f = 1$ s and a slew time of $t_2 - t_1 = 0.6$ s. Using a symmetrical velocity profile requires that $t_1 = 0.2$ and $t_2 = 0.8$. The total inertia is $I = 10^{-2} + 6\times10^{-4} + 2\times10^{-3} = 11.6\times10^{-3}$. From Table 1.5.1 we have $\omega_{max} = 4\pi / 0.8 = 15.7083$ rad/s or $60\omega_{max} / (2\pi) = 150$ rpm. So the load will rotate at that speed for 0.6 s.

We are given that $T_d = 0.5$ N·m. So the maximum torque required is $T_{max} = 1.4111$ N·m and the rms average torque is $T_{rms} = 0.7629$ N·m.

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.32 The equivalent inertia of the load mass is, from (1.5.11),

$$I_L = \frac{50(0.008)^2}{4\pi^2} = 8.106\times 10^{-7}$$

The mass of the screw is

$$m_r = \rho V = 7700\pi(0.01)^2(0.7) = 1.6933 \text{ kg}$$

and the inertia of the screw is

$$I_r = \frac{1}{2}1.6933(0.01)^2 = 8.467\times 10^{-5}$$

So the total system inertia is

$$I = I_m + I_L + I_r = 2\times 10^{-4} + 8.106\times 10^{-7} + 8.467\times 10^{-5} = 2.855\times 10^{-4} \quad \text{kg}\cdot\text{m}^2$$

From the equation of motion, the required torque is $T = I\dot{\omega}$. The linear displacement x of the mass is related to the rotation angle θ of the screw by $x = L\theta / 2\pi$. Thus the linear acceleration $\ddot{x}$ is related to the angular acceleration $\ddot{\theta} = \dot{\omega}$ by $\dot{\omega} = 2\pi\ddot{x} / L$.

The given linear acceleration is $\ddot{x} = (0.3 - 0)/0.2 = 2 = 1.5$ m/s^2. Thus

$$\dot{\omega} = \frac{2\pi(1.5)}{0.008} = 1178.1 \text{ rad/s}^2$$

Thus the required torque is $T = 2.855\times 10^{-4}(1178.1) = 0.3363$ N$\cdot$m.

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.33

```
>> x=2;y=5;(y*x^3)/(x-y)
ans =
-13.3333
>> 3*x/(2*y)
ans =
0.6000
>> (3.2)*x*y
ans =
32
>> x^5/(x^5-1)
ans =
1.0323
```

1.34

```
>> x=-7-5j;y=4+3j;
>> x+y
ans =
-3.0000 - 2.0000i
>> x*y
ans =
-13.0000 -41.0000i
>> x/y
ans =
-1.7200 + 0.0400i
```

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

1.35

```
>> (3+6j)/(-7-9j)
ans =
-0.5769 - 0.1154i
>> (5+4j)/(5-4j)
ans =
0.2195 + 0.9756i
>> (3/2)*j
ans =
0.0000 + 1.5000i
>> 3/(2j)
ans =
0.0000 - 1.5000i
```

1.36

```
>> x=5+8j;y=-6+7j;
v>> u=x+y
u =
v -1.0000 +15.0000i
>> v=x*y
v =
-86.0000 -13.0000i
>> w=x/y
w =
0.3059 - 0.9765i
>> z=exp(x)
z =
-2.1594e+01 + 1.4683e+02i
>> r=sqrt(y)
r =
1.2688 + 2.7586i
>> s=x*y^2
s =
6.0700e+02 - 5.2400e+02i
```

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

1.37

```
>> exp(2)
ans =
7.3891
>> log10(2)
ans =
0.3010
>> log(2)
ans =
0.6931
```

1.38

```
>> cos(pi/3)
ans =
0.5000
>> cosd(80)
ans =
0.1736
>> acos(0.7)
ans =
0.7954
>> acosd(0.6)
ans =
53.1301
```

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.39

```
>> atan(2)
ans =
1.1071
>> atan(100)
ans =
1.5608
```

The answers for (c), (d), and (e) are in degrees.

```
>> atan2d(3,2)
ans =
56.3099
>> atan2d(3,-2)
ans =
123.6901
>> atan2d(-3,2)
ans =
-56.3099
```

1.40

```
>> x=1:0.2:5;
>> y=7*sin(4*x);
>> length(y)
ans =
21
>> y(3)
ans =
-4.4189
```

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.41

```
roots([13,182,-184,2503])
ans =
-15.6850 + 0.0000i
0.8425 + 3.4008i
0.8425 - 3.4008i
```

1.42

```
roots([70,24,-10,20])
ans =
-0.8771 + 0.0000i
0.2671 + 0.5044i
0.2671 - 0.5044i
```

1.43

```
>>poly([-2+5j,-2-5j,-7])
ans =
1 11 57 203
```

This gives the polynomial

$$x^3 + 11x^2 + 57x + 203$$

To check,

```
>> roots(ans)
ans =
-7.0000 + 0.0000i
-2.0000 + 5.0000i
-2.0000 - 5.0000i
```

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

1.44

```
>> x=linspace(0,2,300);u=2*log10(60*x+1);v=3*cos(6*x);
>> plot(x,u,x,v,'–'),xlabel('Miles'),ylabel('Mph'),gtext('u'),gtext('v')
```

1.45

```
>> h=polyval([0.0125,-5,500],t);
>> plot(t,h),xlabel('Time(s)'),ylabel('Height (m'))
```

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.46 The given parameters are m, g, h_0, and v_0. Follow Example 1.4.1 and program equations (1.4.3) for α and (1.4.2) for t_f.

1.47

```
t1=0:0.001:0.5;
om1=300*t1;
t2=0.501:0.001:2.5;
om2=150*ones(size(t2));
t3=2.501:0.001:3;
om3=-300*(t3-2.5)+150;
t=[t1,t2,t3];
om=[om1,om2,om3];
plot(t,om)
```

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.48 Here is a fragment of the program. You must create code to input the following parameters: θ_f, T_d, t_1, t_2, t_f, and I.

```
om_max=theta_f/t2
alpha_max=theta_f/(t1*t2)
T_max=I*theta_f/(t1*t2)+Td
T_rms = sqrt(2*I^2*theta_f^2/(tf*t1*t2^2)+Td^2)
```

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual

1.49

Follow Example 1.5.5. The equations are:

$$I_L = \frac{mL^2}{4\pi^2} \qquad m_s = 7700\pi r^2 L$$

$$I_s = \frac{1}{2} m_s r^2 \qquad I = I_m + I_L + I_s$$

$$\ddot{x} = \frac{v_s}{t_1} \qquad \dot{\omega} = \frac{2\pi\ddot{x}}{L}$$

$$T = I\dot{\omega}$$

© McGraw Hill LLC. All rights reserved. No reproduction or distribution without the prior written consent of McGraw Hill LLC.

System Dynamics 4th edition Palm Solutions Manual