Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

SKU: 9780134712826-SOLUTIONS

Solutions Manual for

Fluid Mechanics for Chemical Engineers

Third Edition

with Microfluidics, CFD, and COMSOL Multiphysics 5

James O. Wilkes



Boston • Columbus • Indianapolis • New York • San Francisco • Amsterdam • Cape Town
Dubai • London • Madrid • Milan • Munich • Paris • Montreal • Toronto • Delhi • Mexico City
São Paulo • Sydney • Hong Kong • Seoul • Singapore • Taipei • Tokyo

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

The author and publisher have taken care in the preparation of this work, but make no expressed or implied warranty of any kind and assume no responsibility for errors or omissions. No liability is assumed for incidental or consequential damages in connection with or arising out of the use of the information or programs contained herein.

Visit us on the Web: informit.com

Copyright © 2018 Pearson Education, Inc.

This work is protected by United States copyright laws and is provided solely for the use of instructors in teaching their courses and assessing student learning. Dissemination or sale of any part of this work (including on the World Wide Web) will destroy the integrity of the work and is not permitted. The work and materials from it should never be made available to students except by instructors using the accompanying text in their classes. All recipients of this work are expected to abide by these restrictions and to honor the intended pedagogical purposes and the needs of other instructors who rely on these materials.

ISBN-13: 978-0-13-470226-1
ISBN-10: 0-13-470226-3

1 17

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Table of Contents

Page

Chapter 1 1

Chapter 2 41

Chapter 3 105

Chapter 4 159

Chapter 5 216

Chapter 6 240

Chapter 7 303

Chapter 8 347

Chapter 9 394

Chapter 10 442

Chapter 11 488

Chapter 12 528

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.1

Units Conversion

(a) $\frac{1}{640} \times 5280^2 = 4.36 \times 10^4 \text{ ft}^3$

acre ft $\frac{\text{mile}^2}{\text{acre}}$ $\frac{\text{ft}^2}{\text{miles}^2}$

(b) $4.36 \times 10^4 \text{ ft}^3 \times 7.48 \frac{\text{gal}}{\text{ft}^3} = 3.26 \times 10^5 \text{ gal}$

(c) $4.36 \times 10^4 \text{ ft}^3 \times \frac{1}{3.281^3} \frac{\text{m}^3}{\text{ft}^3} = 1,233 \text{ m}^3$

(d) $M = \rho V$

V ρ

$= 1,233 \text{ m}^3 \times 1,000 \frac{\text{kg}}{\text{m}^3} = 1.233 \times 10^6 \text{ kg}$

$= 1,233$ tonnes (t)

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.2

Units Conversion

Viscosity

$$\mu = 10 \text{ centipoise} = 10 \times 0.01 \times 10^{-1} \underbrace{\frac{kg}{m\,s}}_{1 \text{ poise}} = 0.01 \frac{kg}{m\,s}$$

$$= 0.01 \times \frac{0.3048}{0.4536} = 6.72 \times 10^{-3} \frac{lbm}{ft\,s}$$

$$\frac{kg}{m\,s} \quad \frac{lbm}{kg} \quad \frac{m}{ft}$$

(Useful conversion factors: $1 \text{ cp} = 0.000672 \text{ lbm/ft s}$
$= 2.42 \text{ lbm/(ft hr)}$)

Density

$$\rho = 0.8 \times 1 \times \frac{(100)^3}{1000} = 800 \frac{kg}{m^3}$$

$$\frac{g}{cm^3} \quad \frac{kg}{g} \quad \left(\frac{cm}{m}\right)^3$$

$$= 0.8 \times 62.4 = 49.9 \frac{lbm}{ft^3}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.3
Units Conversion

Gravitational Acceleration

$$g = \frac{981}{100}\ \frac{cm}{s^2}\ \frac{m}{cm} = 9.81\ \frac{m}{s^2}$$

Pressure

$$p = \frac{14.7 \times 32.2 \times 144 \times 3.281}{2.205}$$

$$\frac{lbf}{in^2}\ \frac{lbm\ ft}{lbf\ s^2}\ \frac{in^2}{ft^2}\ \frac{kg}{lbm}\ \frac{ft}{m}$$

$$= 1.01 \times 10^5\ \frac{kg}{m\ s^2} = \frac{N}{m^2} = Pa$$

Since 1 bar $= 10^5$ Pa


$$p = 1.01\ bar$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.4

Meteotite Density

Mass $M = \frac{\pi D^3}{6}\rho$



$$\rho = \frac{6M}{\pi D^3} = \frac{6 \times 10^6 \times 1000}{\pi \times 60^3}$$

$$\rho = 8,842 \ \frac{kg}{m^3}$$

$$s = \frac{8,842}{1,000} = 8.84$$

Specific gravities of some elements are

Fe	7.86	Co	8.9	Ag	10.5
Ni	8.9	Pb	11.3	Au	19.3
				U	18.5

Most likely candidate is iron, the deviation being due to the "ball park" figures in the article.

Kinetic Energy

$$\frac{1}{2} M u^2 = \frac{1}{2} 10^9 \times (15000)^2 = 1.125 \times 10^{17} \ J$$

$$\text{TNT equivalent} = \frac{1.125 \times 10^{17}}{5 \times 10^9} = 2.25 \times 10^7 \text{ tonnes}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.5

Reynolds Number

Cross-sectional area

$$A = \frac{\pi D^2}{4} = \frac{\pi \left(\frac{1.05}{12}\right)^2}{4} = 0.00601 \ ft^2$$

Volumetric flow rate

$$Q = \frac{35}{7.48 \times 60} = 0.0780 \ \frac{ft^3}{s}$$

Mean velocity

$$u_m = \frac{Q}{A} = \frac{0.0780}{0.00601} = 12.98 \ \frac{ft}{s}$$

Reynolds number

$$Re = \frac{\rho u_m D}{\mu} = \frac{62.3 \times 12.98 \times 1.05/12}{1.2 \times 0.000672}$$

$$\frac{\frac{lbm}{ft^3} \ \frac{ft}{s} \ ft}{cP \ \frac{cP}{lbm/ft\,s}} \quad \left.\begin{array}{l}\\\\\end{array}\right\} \text{All units cancel}$$


$$\doteq \underline{\underline{87,740}} \quad \text{(dimensionless)}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.6

Pressure in Bubble

Atmosphere p_a



Radius $a = \frac{d}{2}$

From notes, The increase in pressure as we go inwards across a convex surface is

$$p_f - p_a = \frac{2\sigma}{a}$$
$$p_b - p_f = \frac{2\sigma}{a}$$

} Two surfaces are involved

Hence, by addition,


$$p_b - p_a = \frac{4\sigma}{a} = \frac{8\sigma}{d}$$

$$p_b = p_a + \frac{8\sigma}{d}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.7

Reservoir Water-Flooding

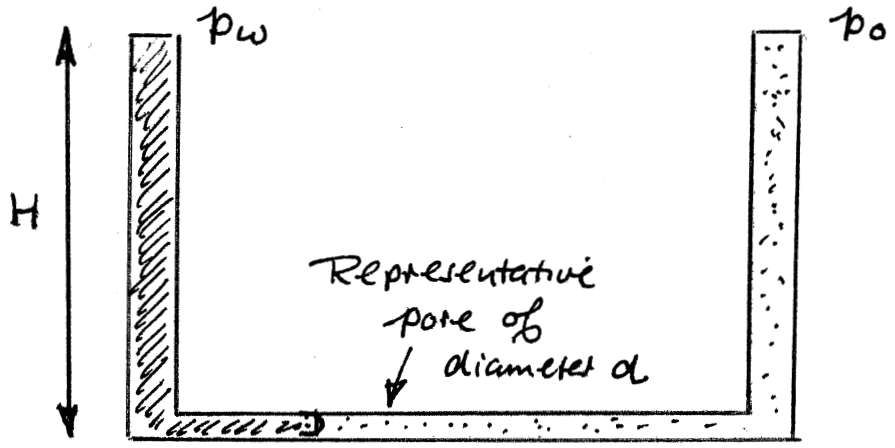

$$p_o + \rho_o g H + \frac{4\sigma}{d} = p_w + \rho_w g H$$

Increase in pressure from oil into water

Hence required water inlet pressure is

$$p_w = p_o - \underbrace{(\rho_w - \rho_o)}_{\text{Positive}} g H + \frac{4\sigma}{d}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Barometer Reading


② • House $z_2 = 950$ ft $p_2 = ?$ $H_2 = ?$

① • Weather Station $z_1 = 700$ ft $p_1 = 0.966$ bar $H_1 = ?$

At the weather station

The atmospheric pressure p_1 is balanced by a column of mercury of height H_1:

$$p_1 = \rho_M g H_1$$

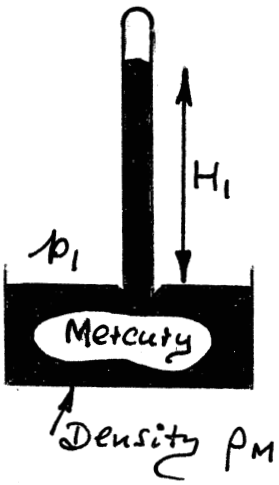

Hence

$$H_1 = \frac{p_1}{\rho_M g} = \frac{0.966 \times 10^5 \times 3.281 \times 12}{13.57 \times 1000 \times 9.81}$$

$$\frac{kg}{m^2}\frac{m}{s^2}\frac{m^3}{kg}\frac{s^2}{m}\frac{in}{m} = in$$

$$= \underline{\underline{28.57 \text{ in mercury}}}$$

(Note: $g = 9.81\ m/s^2$, $3.281\ ft = 1\ m$, $\rho_W = 1000\ \frac{kg}{m^3}$, $1\ bar = 10^5\ pascal = 10^5\ \frac{kg\frac{m}{s^2}}{m^2}$)

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Correction for elevation increase. Since $z_2 - z_1$ is "small" for air, we can take ρ_A as essentially constant between ① and ②. Now pressure at weather station is

$$0.966 \text{ bar} \times \frac{14.7 \text{ psia}}{1.01 \text{ bar}} \left(\begin{matrix}\text{see}\\ \text{Problem}\\ 3\end{matrix}\right) = 14.06 \text{ psia}$$

Hence the appropriate mean pressure between ① and ② for purposes of estimating the density can be taken as 14.06 or (as done here, with a trifling change in the answer) slightly less — say 14.0 psia.

$$\rho_A = \frac{M_A p}{RT} = \frac{28.8 \times 14.0}{10.73 \times (460+25)} = 0.0775 \frac{\text{lbm}}{\text{ft}^3}$$

↑ Average for January

Change in Pressure $\quad p_2 - p_1 = -\rho_A g (z_2 - z_1)$

Change in Barometer Reading $\quad H_2 - H_1 = \dfrac{p_2 - p_1}{\rho_M g} = -\dfrac{\rho_A}{\rho_M}(z_2 - z_1)$

$$H_2 - H_1 = -\frac{0.0775(950-700)\times 12}{13.57 \times 62.4} = -0.27 \text{ in}$$

Hence $H_2 = H_1 - 0.27 = 28.57 - 0.27 = \underline{\underline{28.3 \text{ in Hg}}}$

Pressure $\quad p_2 = \rho_M g H_2 = \dfrac{13.57 \times 62.4 \times 32.2 \times 28.3}{32.2 \times 144 \times 12}$


$$p_2 = \underline{\underline{13.87 \text{ psia}}}$$

$\dfrac{\text{lbm}}{\text{ft}^3}\ \dfrac{\text{ft}}{\text{sec}^2}$ in $\dfrac{\text{lbf sec}^2}{\text{lbm ft}}\ \dfrac{\text{ft}^2}{\text{in}^2}\ \text{ft in}$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.9

Two-Layer Buoyancy

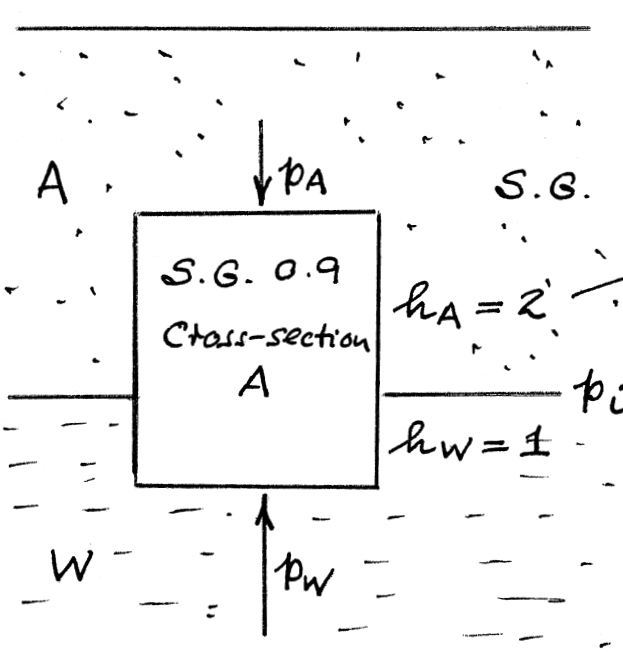

Method 1

Weight displaced (upwards buoyant force) = Weight of cylinder downwards

$$\rho_w A g (1 + 2s_A) = 0.9 \rho_w A 3 g$$

$$s_A = 0.85$$

Method 2 Force balance on cylinder ↓

$$p_A A + 0.9 \rho_w A 3 g - p_W A = 0$$


(weight)

$$p_i - 2 s_A \rho_w g + 2.7 \rho_w g - (p_i + \rho_w g) = 0$$

$$s_A = 0.85$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual


Differential Manometer

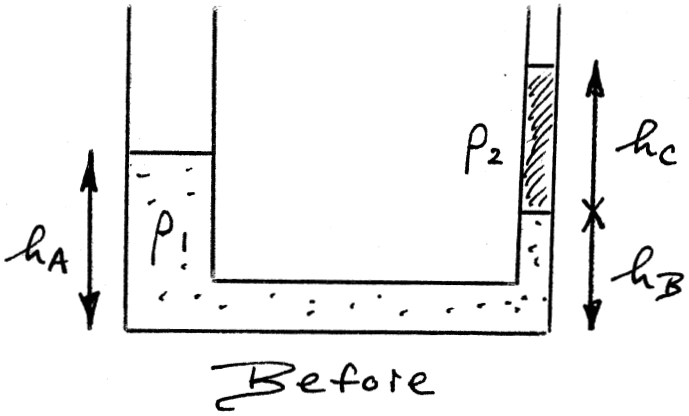

Before

$$\rho_1 (h_A - h_B) = \rho_2 h_C \qquad (1)$$

Now add Δ to h_C and let h_B decline by δ

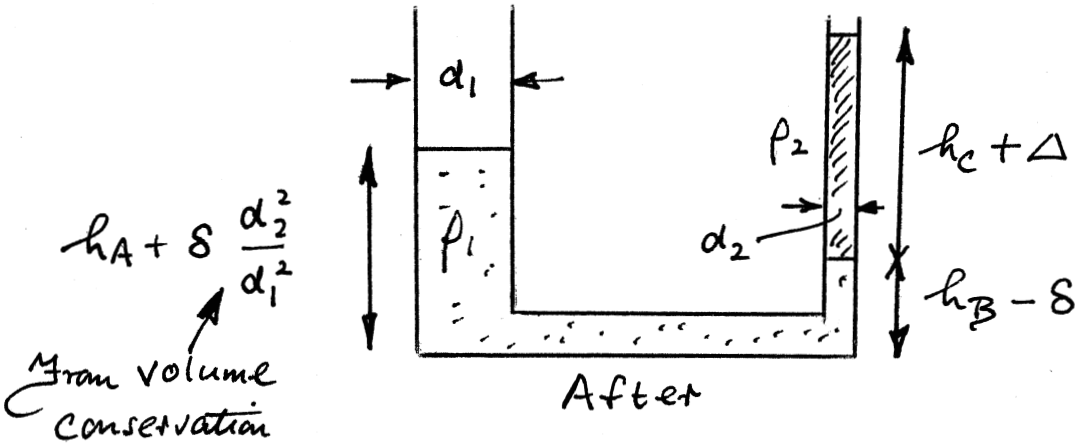

After

$$\rho_1 \left(h_A + \delta \frac{d_2^2}{d_1^2} - (h_B - \delta)\right) = \rho_2 (h_C + \Delta) \qquad (2)$$

Subtract (1) from (2)

$$\rho_1 \delta \left(\frac{d_2^2}{d_1^2} + 1\right) = \rho_2 \Delta = \rho_2 \frac{v_2}{\frac{\pi}{4} d_2^2} \qquad (3)$$

Equation (3) gives δ as a function of v_2, and also enables ρ_2 to be found by observing the value of δ.


Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Solution for δ gives:

$$\delta = \frac{\rho_2}{\rho_1} \frac{4 v_2}{\pi d_2^2} \left(\frac{d_1^2}{d_1^2 + d_2^2} \right)$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Ascending Bubble

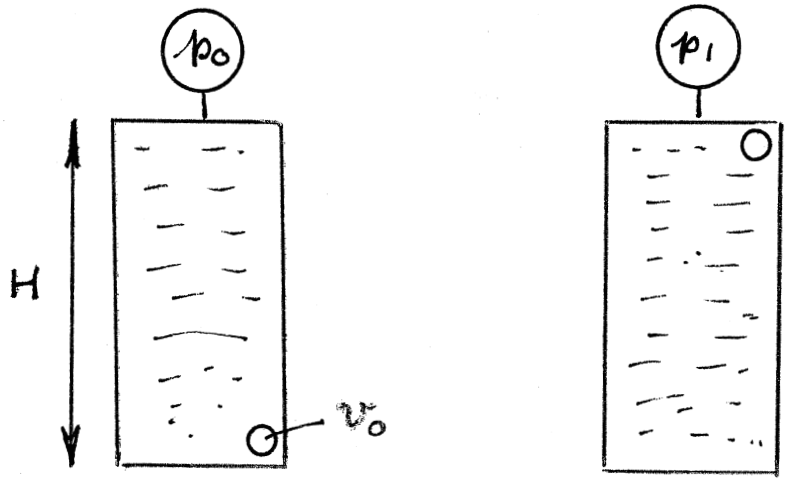

Since the cylinder and oil volumes don't change, the bubble volume must remain constant at v_0.

But

$$pV_0 = nRT$$

Therefore, since T is constant, p within the bubble does not change. Hence

$$p = \underbrace{p_0 + \rho g H}_{\text{Before}} = \underbrace{p_1}_{\text{After}}$$

Thus $$p_1 = p_0 + \rho g H$$


Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.12

Ship Passing Through Locks


Uphill The ship must increase its elevation by an amount h as it passes from lock 1 to lock 2. Consider the water in lock 1 before and after:

Before

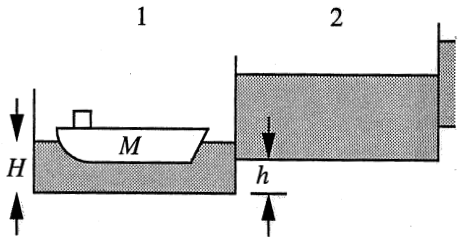

Mass of water in lock $= \rho AH - M$

After

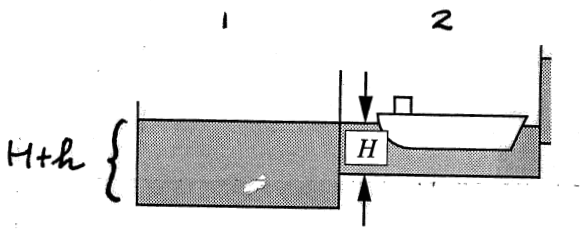

Mass of water in lock $= \rho A(H+h)$

From Archimedes law, the ship displaces a mass M of water

Hence mass of water to be supplied to lock 1 is

$$\rho A(H+h) - (\rho AH - M) = \rho Ah + M$$

Downhill A similar analysis gives the water loss from a lock as

$$\underbrace{\rho AH - M}_{\text{mass at start}} - \underbrace{\rho A(H-h)}_{\text{mass at end (note that final depth of water in lock is } H-h)} = \rho Ah - M$$

Total water supply


(i) Uphill only: $\rho Ah + M$ (depends on M)

(ii) Up and down: $\rho Ah + M + \rho Ah - M = 2\rho Ah$ (independent of M)

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.13

Furnace Stack

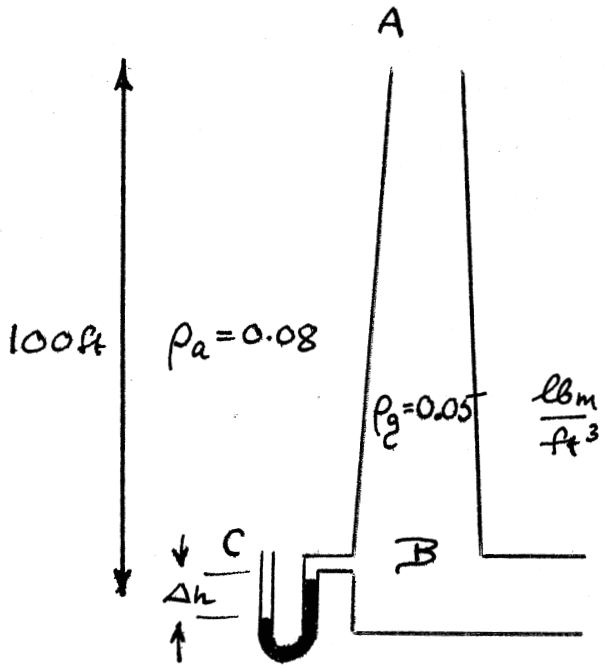

Start from point A and consider hydrostatic increase of pressure in both cases:

$$p_B = p_A + \rho_g g H$$

$$p_C = p_A + \rho_a g H$$

Hence $p_C = p_B + \underbrace{(\rho_a - \rho_g)}_{\text{positive}} g H$

Hence the water moves <u>up</u> in the right-hand leg by Δh given by


$$\rho_w g \Delta h = (\rho_a - \rho_g) g H$$

$$\Delta h = \frac{\rho_a - \rho_g}{\rho_w} H = \frac{(0.08 - 0.05) \times 100 \times 12}{62.4} = \underline{0.58 \text{ in.}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.14

Hydrometer

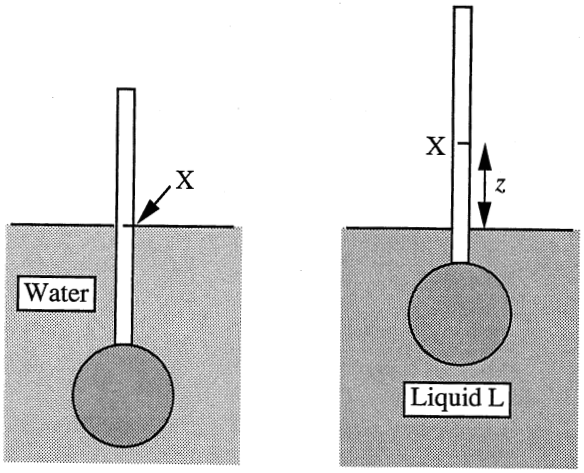

Since the same weight (that of the hydrometer) is supported by the displaced liquid in both cases:

$$\underset{\text{Mass of hydrometer}}{Mg} = V \rho_w g = (V - Az)\rho_w S g$$

(ρ_w: Density of water)


Cancellation of $\rho_w g$ and solution for S gives

$$S = \frac{1}{1 - \frac{Az}{V}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.15

Three-Liquid Manometer

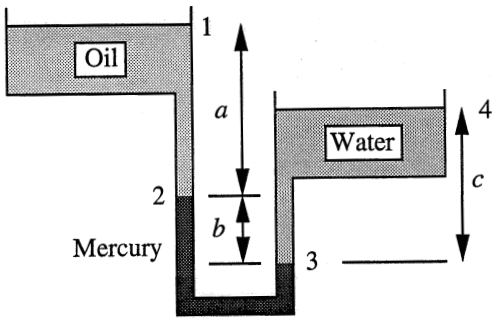

From hydrostatics:

$$p_4 = p_1 + \rho_o a g + \rho_M b g - \rho_w c g = p_1$$

Cancel p_1 and divide by $\rho_w g$, with $s = \frac{\rho}{\rho_w}$

$$s_o a + s_M b = c$$

$$b = \frac{c - s_o a}{s_M} = \frac{48 - 0.8 \times 72}{13.6} = -0.706$$

Thus the diagram is incorrect as drawn, and the mercury rises on the right by 0.706 in.

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Pressure on Mt. Erebus

From lecture notes, $\frac{dp}{dz} = -\rho g = -\frac{Mp}{RT} g$

Separating variables $\int_{p_0}^{p_H} \frac{dp}{p} = -\frac{Mg}{RT} \int_0^H dz$

$$\ln \frac{p_H}{p_0} = -\frac{MgH}{RT} = \frac{28.8 \times 32.2 \times 13500}{10.73 \times (460-5) \times 32.2 \times 144}$$


$$\frac{\text{lbm}}{\text{mole}} \frac{\text{ft}}{\text{sec}^2} \text{ ft } \frac{\text{mole } ^\circ\text{R}}{\text{psia ft}^3} \text{ or } \frac{\text{lbf sec}^2}{\text{lbm ft}} \frac{\text{ft}^2}{\text{in}^2}$$

$$= -0.553 \text{ (dimensionless)}$$

$$p_H = p_0 e^{-0.553} = 13.9 \times 0.575 = \underline{\underline{7.995 \text{ psia}}}$$

From Perry's Chemical Engineers Handbook

T (°F)	Vapor Pressure of Water (psia)
180	7.510
190	9.339

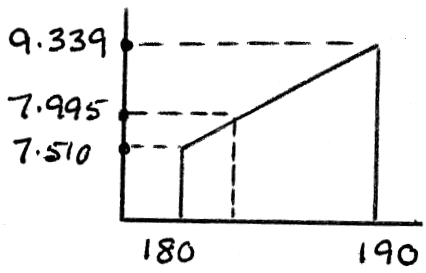


Using linear interpolation

$$T \doteq 180 + \frac{7.995 - 7.510}{9.339 - 7.510} \times 10 \doteq \underline{\underline{182.7 \text{ °F}}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Oil and Gas Well Pressures

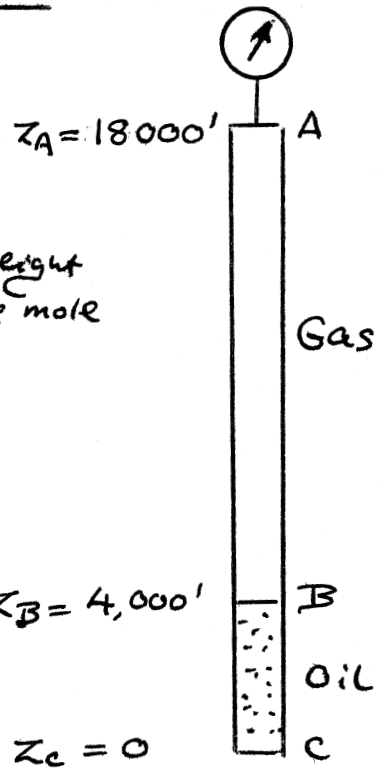

Hydrostatic variation of pressure

$$\frac{dp}{dz} = -\rho g$$

Imperfect Gas Equation

Molecular weight = mass of one mole

$$pV = zRT \quad \text{or} \quad \rho = \frac{M}{V} = \frac{Mp}{zRT}$$

(R: per mole)

For Gas Column

$$\frac{dp}{dz} = -\frac{Mp}{zRT}g \quad \text{or} \quad \int_{p_B}^{p_A}\frac{dp}{p} = -\frac{Mg}{zRT}\int_{z_B}^{z_C} dz$$

$$\ln\frac{p_A}{p_B} = -\frac{0.65\times 28.8\times 32.2\times(18{,}000-4{,}000)}{0.8\times 10.73\times 520\times 144\times 32.2} = -0.408$$

$$p_B = p_A e^{0.408} = 1.503\, p_A$$

$$= 1.503\,(2000+14.7) = 3028.9 \text{ psia}$$

$$p_B = 3014.2 \text{ psig}$$

For Oil Column

$$p_C = p_B + \rho g(z_B - z_C)$$


$$= 3014.2 + \frac{0.70\times 62.4\times 32.2\times 4{,}000}{32.2\times 144}$$

$$= 3014.2 + 1{,}213.3 = 4{,}227.5 \text{ psig}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.18

Thrust on Dam

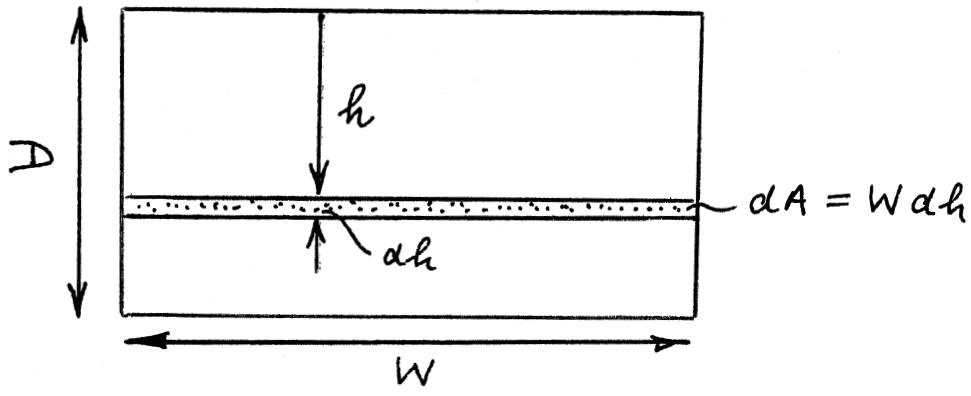

Pressure at depth h is $p = \rho g h$

Force on differential strip

$$dF = p\,dA = \rho g h W dh$$

Total thrust is

$$F = \int_0^F dF = \int_0^D \rho g h W dh$$


$$= \frac{1}{2} \rho g W D^2$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.19

Pressure Variations in Air

Accurately $p = p_0 e^{-(M_w g z/RT)}$



For air at 40°F = 500°R

$$\frac{M_w g}{RT} = \frac{28.8 \times 32.2 \times 5{,}280}{10.73 \times 500 \times 32.2 \times 144} = 0.197 \text{ mile}^{-1}$$

$$\frac{\text{lbm}}{\text{lb mole}} \frac{\text{ft}}{\text{s}^2} \frac{\text{ft}}{\text{mile}} \frac{\text{in}^2}{\text{lbf}} \frac{\text{lb mole °R}}{\text{ft}^3 \text{ °R}} \frac{\text{lbf s}^2}{\text{lbm ft}} \frac{\text{ft}^2}{\text{in}^2} = \frac{1}{\text{mile}}$$

Approximately, $p^a = p_0 \left(1 - \frac{M_w g}{RT} z\right)$

For a 1% error, assuming $p > p^a$ (to be checked)

$$\frac{p - p^a}{p} = 1 - \frac{p^a}{p} = 1 - \frac{1 - 0.197z}{e^{-0.197z}} = 0.01$$

That is, $0.99 e^{-0.197z} + 0.197z - 1 = 0$

From Excel Solver, $z = 0.686$


That is, the approximation is good within 1% for elevations up to 0.686 miles

Note, for $f(z) = 0$, Solver was asked to find z that minimized $|f(z)|$.

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.20

Grand Coulee Dam

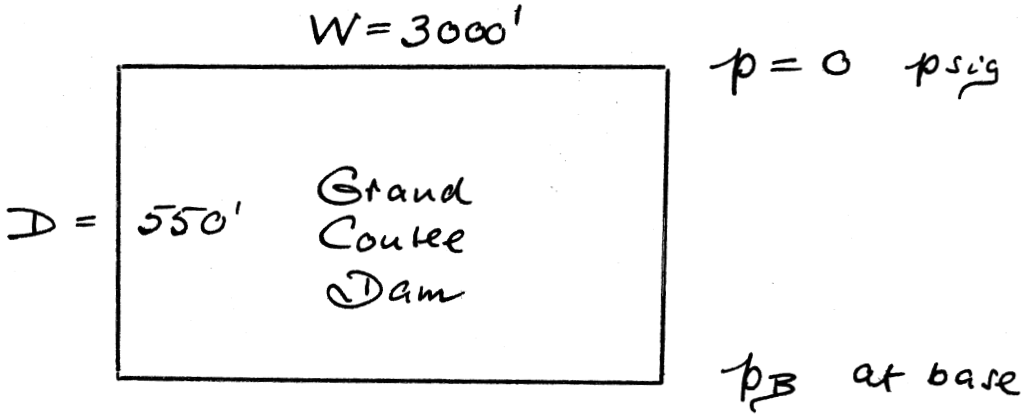

(a) $p_B = \rho g D = \dfrac{62.4 \times 32.2 \times 550}{32.2 \times 144}$

$= \underline{\underline{238.3 \text{ psig}}}$

(b) From lecture notes, horizontal force is


$$F = \underbrace{\frac{1}{2} p_B}_{\bar{p}} W D$$

$$= \frac{238.3 \times 3000 \times 550 \times 144}{2}$$

$$= \underline{\underline{2.83 \times 10^{10} \text{ lb}_f}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Force on V-Shaped Dam

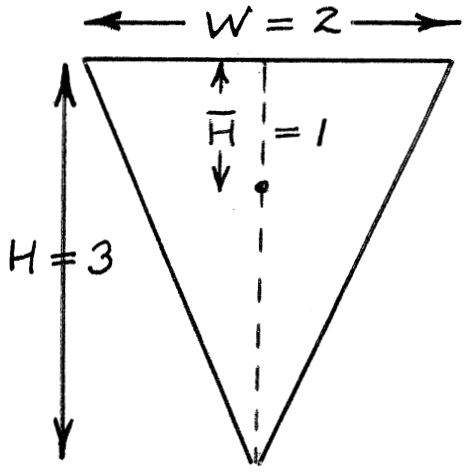

$$A = \frac{2 \times 3}{2} = 3 \text{ m}^2$$


Pressure at centroid

$$\bar{p} = \rho g \bar{H}$$

$$= 10^3 \times 9.81 \times 1$$

$$= 9.81 \times 10^3 \text{ N/m}^2 \text{ or Pa}$$

$$F = \bar{p} A = \underline{2.943 \times 10^4 \text{ N}}$$

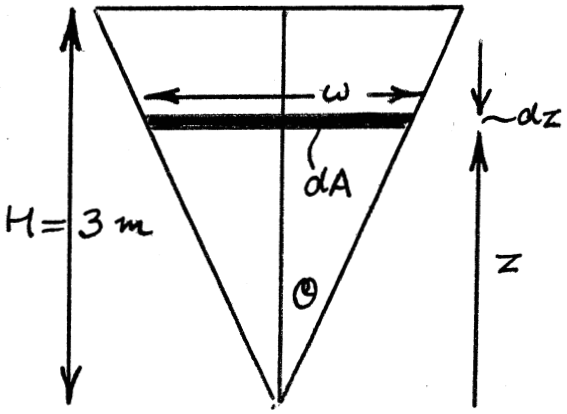

$$w = 2 z \tan\theta$$

$$F = \int_{z=0}^{H} \underbrace{\rho g (H-z)}_{p} \underbrace{w\, dz}_{dA}$$

where $w = 2 z \tan\theta$

$$F = 2 \rho g \tan\theta \int_0^H (H-z) z \, dz$$

$$= 2 \rho g \tan\theta \left[\frac{H z^2}{2} - \frac{z^3}{3} \right]_0^H = \frac{1}{3} \rho g H^3 \tan\theta$$


$$= \frac{1}{3} \times 10^3 \times 9.81 \times 3^3 \times \frac{1}{3} = \underline{29,430 \text{ N}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Rotating Mercury Mirror

Equation of parabola with focal length f is

$$r^2 = 4fz \qquad (1)$$

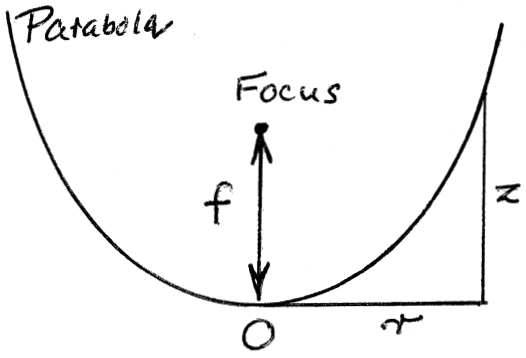

But from fluid mechanics, we know that

$$z = \frac{\omega^2 r^2}{2g} \qquad (2)$$

Angular velocity is $\omega = 2\pi N = 2\pi \times \frac{1}{6} = 1.05 \ \frac{rad}{s}$

Focal length, from (1) and (2), is

$$f = \frac{g}{2\omega^2} = \frac{9.81}{2 \times 1.05^2} = \underline{\underline{4.45 \ m}}$$

Depression at center is also elevation z when $r = \frac{D}{2}$

$$\Delta z = \frac{\omega^2 \left(\frac{D}{2}\right)^2}{2g} = \frac{1.05^2 \left(\frac{40}{12 \times 3.281 \times 2}\right)^2}{2 \times 9.81} \quad (\text{since } z = 0 \text{ at } r = 0)$$


$$= \underline{\underline{0.0145 \ m = 1.45 \ cm}}$$

For new $D = 30$ m mirror (with f unchanged)

$$\Delta z = \frac{1.05^2 \times \left(\frac{30}{2}\right)^2}{2 \times 9.81} = \underline{\underline{12.64 \ m}} \quad (\text{a very large increase})$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Oil & Water in Rotating Container

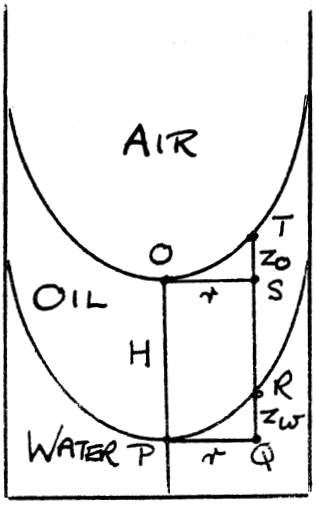

Pressure in water at Q

$$p_o H g + \rho_w \frac{\omega^2 r^2}{2} = p_o z_o g + \rho_o (H - z_w) g + \rho_w z_w g$$

OP PQ TS SR RQ

$$\rho_w \frac{\omega^2 r^2}{2} = p_o z_o g + (\rho_w - \rho_o) z_w g \qquad (1)$$

Pressure in Oil at S

$$\rho_o \frac{\omega^2 r^2}{2} = p_o z_o g \qquad (2)$$

Subtract (2) from (1) $\quad (\rho_w - \rho_o) \frac{\omega^2 r^2}{2} = (\rho_w - \rho_o) z_w g$


Hence $\quad z_w = \frac{\omega^2 r^2}{2g}$

and $\quad z_o = \frac{\omega^2 r^2}{2g}$

} Hence shapes of both interfaces are identical.

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Energy to Place Satellite in Orbit

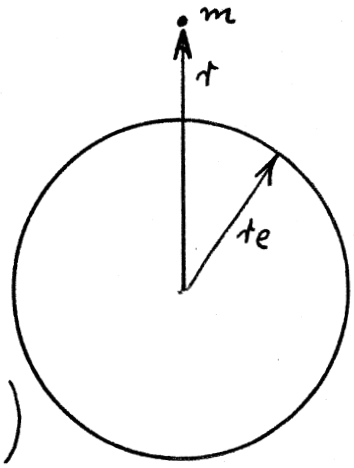

Work done in pushing the satellite through a distance dr is

$$dw = F\,dr = G m M_e \frac{dr}{r^2}$$

Total energy expended is

$$w = \int_0^w dw = \int_{r_e}^{r_s} G m M_e \frac{dr}{r^2} = G m M_e \left(\frac{1}{r_e} - \frac{1}{r_s}\right)$$

For a mass m at the earth's surface,

$$F = mg_e = \frac{G m M_e}{r_e^2} \quad \text{or} \quad GM_e = g_e r_e^2$$

Thus, $$w = m g_e r_e \left(1 - \frac{r_e}{r_s}\right)$$

Numerical values $m = 6{,}700 \times 0.4536 = 3{,}039$ kg

$$r_s - r_e = 360 \times 5{,}280 \times 0.3048 = 5.79 \times 10^5 \text{ m}$$


$$r_s = 5.79 \times 10^5 + 6.37 \times 10^6 = 6.95 \times 10^6 \text{ m}$$

$$w = 3{,}039 \times 9.81 \times 6.37 \times 10^6 \left(1 - \frac{6.37 \times 10^6}{6.95 \times 10^6}\right) = \underline{\underline{1.585 \times 10^{10} \text{ J}}}$$

$$\text{Average power} = \frac{1.585 \times 10^{10}}{78 \times 60} = 3.39 \times 10^6 \text{ W} = \underline{\underline{3.39 \text{ MW}}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Central-Heating Loop

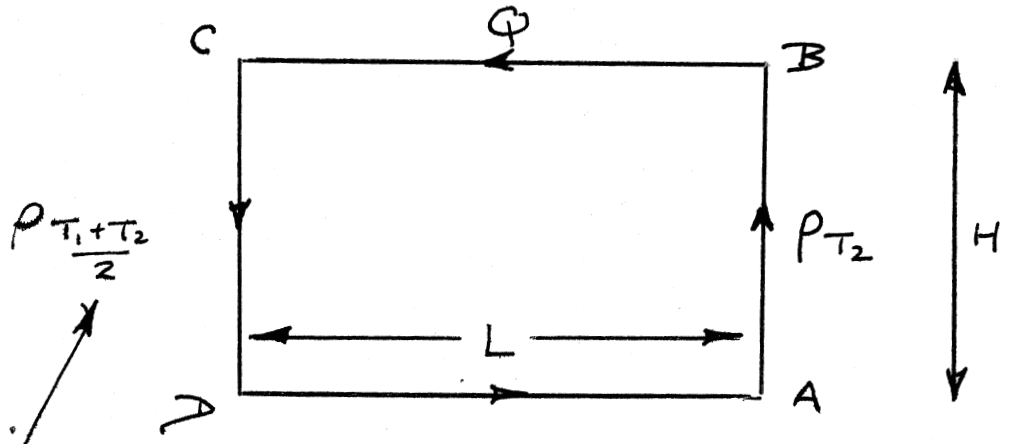

Note that the midpoint temperature along CD is $\frac{1}{2}(T_1+T_2)$

Going round the loop ABCD, there is no net change in the pressure:

$$-\rho_{T_2} g H + \rho_{\frac{T_1+T_2}{2}} g H - \frac{c u^2}{D}(2L+2H) = 0$$

Loss in AB — Gain in CD: Hydrostatic changes

Total frictional loss

But $\rho = \bar{\rho}[1-\alpha(T-\bar{T})]$

$$\rho_{\frac{T_1+T_2}{2}} - \rho_{T_2} = \alpha\bar{\rho}\left(T_2 - \frac{T_1+T_2}{2}\right) = \frac{1}{2}\alpha\bar{\rho}(T_2-T_1)$$

Hence

$$\frac{1}{2} g H \alpha \bar{\rho}(T_2-T_1) = \frac{2 c u^2}{D}(L+H)$$


But $Q = \frac{\pi D^2}{4} u$ or $u^2 = \frac{16 Q^2}{\pi^2 D^4}$

Hence $$Q = \sqrt{\frac{\pi^2 g H \alpha \bar{\rho} D^5 (T_2-T_1)}{64 c (L+H)}}$$

27

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Pressure at Center of Earth

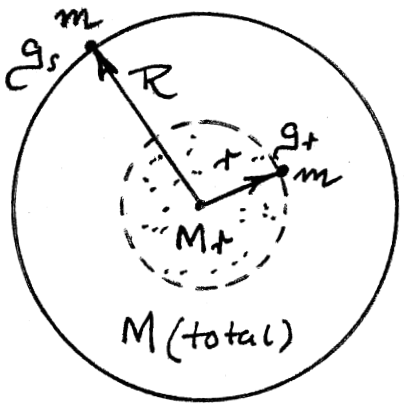

Assume earth is liquid with uniform density ρ.

For mass m at radii r and R, the gravitational attractions are

$$m g_r = \frac{G m M_r}{r^2}$$

$$m g_s = \frac{G m M}{R^2}$$

$$\frac{g_r}{g_s} = \frac{M_r R^2}{M r^2}$$

Masses: $M_r = \frac{4}{3}\pi \rho r^3$, $M = \frac{4}{3}\pi \rho R^3$

$$\frac{M_r}{M} = \frac{r^3}{R^3}$$


$$\boxed{\frac{g_r}{g_s} = \frac{r}{R}}$$

Hydrostatic Variations

$$\frac{dp}{dr} = -\rho g_r = -\frac{\rho g_s}{R} r$$

$$\int_{p_r}^{0} dp = -\frac{\rho g_s}{R}\int_{r}^{R} r\, dr$$

Hence $p_r = \frac{\rho g_s R}{2}\left(1 - \frac{r^2}{R^2}\right)$

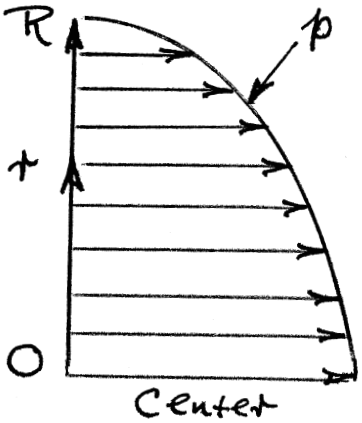

Thus, there is a parabolic variation of pressure.

$$p_c = \frac{\rho g_s R}{2}$$

$$p_c = \frac{g_s R}{2}\left(\frac{3M}{4\pi R^3}\right) = \frac{3 M g_s}{8\pi R^2}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Numerical Values

$$M = \frac{4}{3}\pi R^3 \rho$$

Hence

$$p_c = \frac{3 M g_s}{8\pi R^2} = \frac{3\left(\frac{4}{3}\pi R^3\right)\rho g_s}{8\pi R^2}$$

$$= \frac{R \rho g_s}{2}$$

$$= \frac{6.37 \times 10^6 \times 5{,}500 \times 9.81}{2}$$

$$m \; \frac{kg}{m^3} \; \frac{m}{s^2} = \frac{kg}{m s^2} = Pa$$

$$p_c = 1.72 \times 10^{11} \text{ Pa}$$

But 1 atm = 14.7 psi = 1.0133×10^5 Pa

Hence


$$p_a = \frac{1.72 \times 10^{11} \times 14.7}{1.0133 \times 10^5}$$

$$= 2.49 \times 10^7 \text{ psi}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.27

Soap Film on Wire Rings

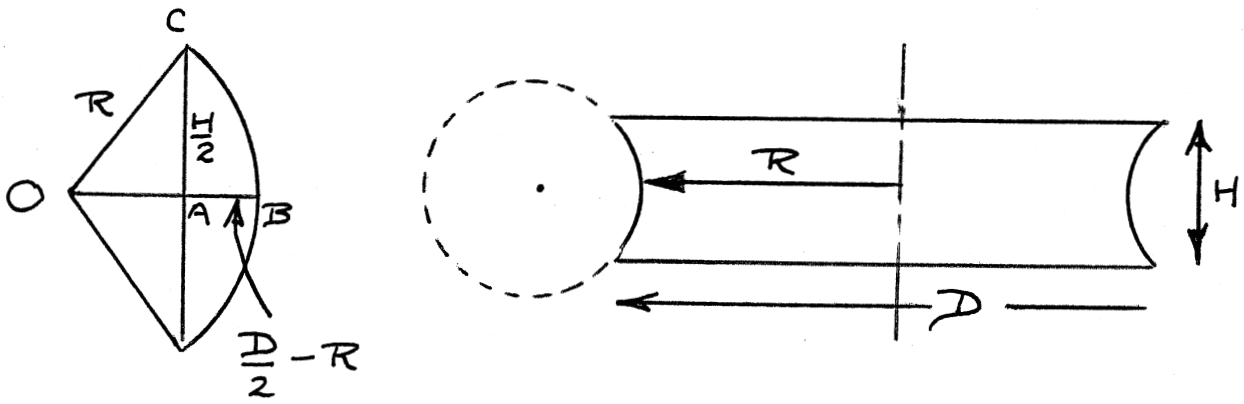

For curved surface, $\Delta p = \sigma\left(\frac{1}{r_1} + \frac{1}{r_2}\right)$

Since there is zero pressure change across the film, the two radii of curvature must be equal, the one positive and the other negative.

Geometry gives $OA = R - \left(\frac{D}{2} - R\right) = 2R - \frac{D}{2}$

Pythagoras gives $R^2 = \left(2R - \frac{D}{2}\right)^2 + \left(\frac{H}{2}\right)^2$

$$= 4R^2 - 2RD + \frac{D^2}{4} + \frac{H^2}{4}$$

$$12R^2 - 8RD + (D^2 + H^2) = 0$$

$$R = \frac{8D + \sqrt{64D^2 - 48(D^2+H^2)}}{24} = \frac{1}{6}\left(2D + \sqrt{D^2 - 3H^2}\right)$$


For $D < \sqrt{3}H$ this solution is clearly invalid.

In practice, as the rings are pulled further apart, the film would minimize its total area by forming two separate circles on the rings, with no film in between them.

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.28

Treadmill Stress Test

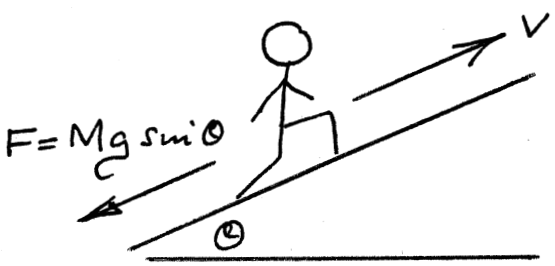

grade = tan θ

10%: θ = 5.71°, sin θ = 0.100

18%: θ = 10.20°, sin θ = 0.177

Power $P = Fv = Mg \sin\theta \, V$

$$= \frac{163 \times 32.2 \times 0.177 \times 5 \times 5280}{550 \times 32.2 \times 3600}$$

$\frac{lb_m}{} \frac{ft}{s^2} \frac{mile}{hr} \frac{ft}{mile} \frac{s}{ft} \frac{HP}{lb_f} \frac{lb_f s^2}{lb_m ft} \frac{hr}{s}$

$P = 0.385$ HP (at end of test)

Power at start of test

$$= \frac{163 \times 32.2 \times 0.100 \times 1.7 \times 5280}{550 \times 32.2 \times 3600} = 0.0739 \text{ HP}$$

Mean power $\bar{P} \doteq \frac{1}{2}(0.0739 + 0.385) = 0.229$ HP

Energy expended $E = \bar{P}t$

$$= \frac{0.229 \times 13.3 \times 550 \times 60 \times 0.3048}{0.2248} = 1.36 \times 10^5 \text{ J}$$

$HP \text{ min} \frac{ft \, lb_f}{s \, HP} \frac{s}{min} \frac{m}{ft} \frac{N}{lb_f} = N m = J$


Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.29-1

Bubble Rising in Compressible Liquid

Isothermal compressibility $\beta = -\frac{1}{V}\left(\frac{\partial V}{\partial p}\right)_T \doteq -\frac{1}{V}\frac{\Delta V}{\Delta p}$

Hence $\Delta V \doteq -\beta V \Delta p$ (1)

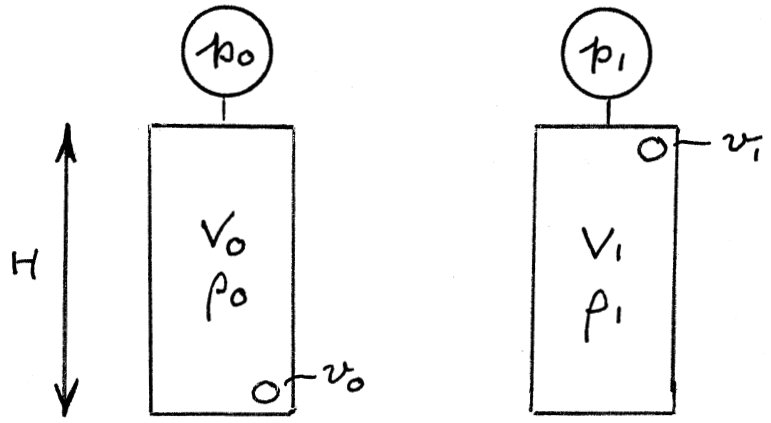

Rigid container $V_0 + v_0 = V_1 + v_1$ (2)

Ideal gas $(p_0 + \rho_0 g H)\, v_0 = p_1 v_1$ (3)

Constant oil mass $m = \rho_0 V_0 = \rho_1 V_1$ or $\rho_1 = \rho_0 \frac{V_0}{V_1}$ (4)

From isothermal compressibility (1)

$$\frac{V_1 - V_0}{V_0} = -\beta\left[\underbrace{p_1 + \tfrac{1}{2}\rho_1 g H - (p_0 + \tfrac{1}{2}\rho_0 g H)}_{\text{Take mean pressures at mid-height}}\right]$$

$$= -\beta\left[(p_1 - p_0) + \tfrac{1}{2} g H (\rho_1 - \rho_0)\right]$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

From (2) and (3) and (4):

$$\frac{v_0 - v_1}{V_0} = -\beta\left[(p_0 + \rho_0 g H)\frac{v_0}{v_1} - p_0 + \frac{1}{2} g H \rho_0 \left(\frac{V_0}{V_1} - 1\right)\right]$$

$$= -\beta\left[p_0\left(\frac{v_0 - v_1}{v_1}\right) + \rho_0 g H\left(\frac{v_0}{v_1} + \frac{1}{2}\frac{v_1 - v_0}{V_1}\right)\right]$$

(A) (B)

Since $V_1 >> v_1$ or v_0, (B) << (A), so that:

$$(v_0 - v_1)\left[\frac{1}{V_0} + \frac{\beta p_0}{v_1}\right] = -\beta \rho_0 g H \frac{v_0}{v_1}$$

(C) (D)

Since $\beta p_0 V_0 >> v_1$, (D) >> (C), so β cancels and:

$$(v_0 - v_1)\frac{p_0}{v_1} = -\rho_0 g H \frac{v_0}{v_1}$$

or

$$\frac{v_1}{v_0} = 1 + \frac{\rho_0 g H}{p_0} = 1 + \frac{\rho g H}{p_0}$$

Thus, the bubble expands upon rising.

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Numerical values

$$\frac{\rho g H}{p_0} = \frac{800 \times 9.81 \times 1}{10^5} = 0.0785$$

(1 bar = 10^5 Pa)

$$\frac{kg}{m^3} \quad \frac{m}{s^2} \quad m \quad \frac{m\,s^2}{kg}$$

Hence $\frac{v_1}{v_0} = 1.0785$

Check on assumption that $\beta p_0 V_0 >> v_1$

$$5.5 \times 10^{-10} \times 10^5 \times 0.1 \overset{?}{>>} 10^{-8}$$

$$\frac{m^2}{N} \quad \frac{N}{m^2} \quad m^3 \qquad m^3$$

$$5.5 \times 10^{-6} \overset{?}{>>} 10^{-8} \quad \text{OK}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Pressures in Oil and Gas Well

Variation of pressure with elevation for an ideal gas:

$$\frac{dp}{dz} = -\rho g = -\frac{Mp}{RT} g$$

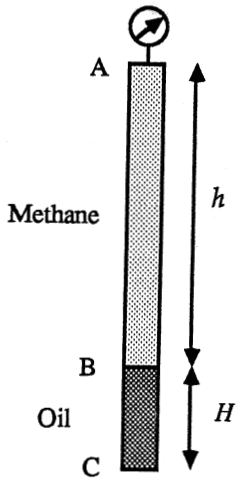


Fig. 1 Well containing oil and methane.

Separate variables and integrate:

$$\int_{p_A}^{p_B} \frac{dp}{p} = -\frac{Mg}{RT} \int_{h}^{0} dz$$

$$\ln \frac{p_B}{p_A} = +\frac{Mgh}{RT} = \frac{16 \times 32.2 \times 10{,}000}{10.73 \times 560 \times 32.2 \times 144}$$

$$= 0.185$$

$$[=] \quad \frac{lbm}{mole} \quad \frac{ft}{s^2} \quad ft \quad \frac{in^2 \; mole \; ^\circ R}{lb_f \; ft^3} \quad ^\circ R \quad \frac{lb_f \; s^2}{lb_m \; ft} \quad \frac{ft^2}{in^2} \quad \text{(all units cancel)}$$

$$p_B = p_A e^{0.185} = 1014.7 \times 1.203 = \underline{\underline{1221 \text{ psia}}}$$


Pressure increase in the oil section

$$p_C - p_B = \rho_o g H = \frac{0.75 \times 62.4 \times 32.2 \times 2000}{32.2 \times 144}$$

$$= \underline{\underline{650 \text{ psi}}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Soap Film Between Two Disks

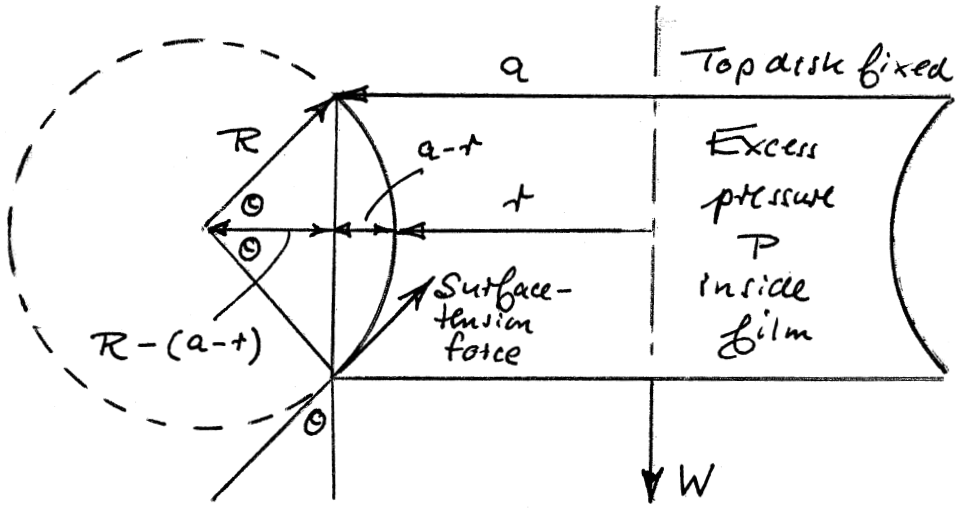

Force balance ↓ on bottom disk

$$W + P\pi a^2 = 2\pi a(2\sigma)\cos\theta$$

↑ Film has two sides

$$\text{Hence} \quad \theta = \cos^{-1}\left(\frac{W + P\pi a^2}{4\pi a\sigma}\right)$$

Excess pressure $P = 2\sigma\left(\frac{1}{r} - \frac{1}{R}\right)$

$$\text{or} \quad \frac{1}{R} = \frac{1}{r} - \frac{P}{2\sigma}$$

From geometry, $\cos\theta = \frac{R-(a-r)}{R} = 1 + \frac{r-a}{R}$

$$\text{Hence} \quad \frac{W + P\pi a^2}{4\pi a\sigma} = 1 + (r-a)\left(\frac{1}{r} - \frac{P}{2\sigma}\right)$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.32

Newspaper Statements About the Erg

The February 10 letter probably said:


"Concerning the definition of the erg, the January 18 statement is incorrect and the January 30 letter is misleading at best. For example, if the mass were on a virtually frictionless horizontal table, it would require virtually no energy to move it through a (horizontal) distance of one centimeter.

The erg is more correctly defined as the amount of work done (equivalent to energy expended) in pushing back a resisting force of one dyne through a distance of one centimeter. One dyne is the force needed, when applied to a mass of one gram, to accelerate it at one centimeter per second per second."

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.33

Centroid of Triangle

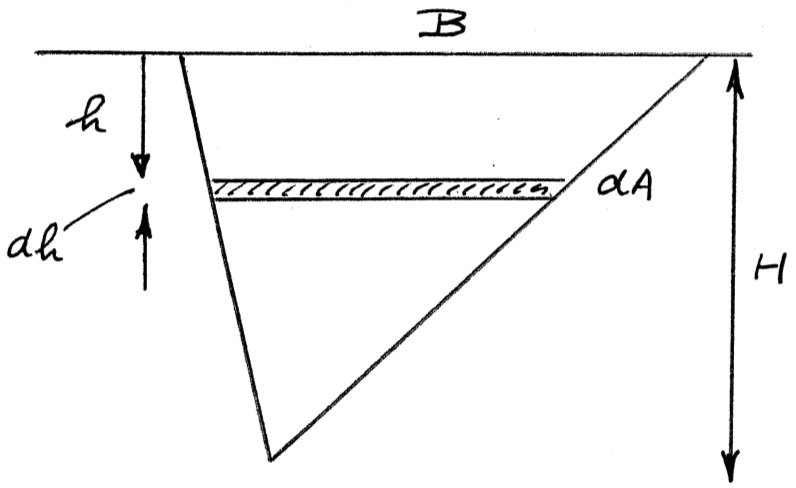

From the text $h_c \equiv \dfrac{\int_A h\,dA}{A} = \dfrac{\int_A h\,dA}{\int_A dA}$

Now the width of the triangle is proportional to $(H-h)$ at any depth h, so that

$dA = c(H-h)\,dh$, where c is a constant.

Thus $h_c = \dfrac{\int_0^H h\,c(H-h)\,dh}{\int_0^H c(H-h)\,dh} = \dfrac{\frac{H^3}{6}}{\frac{H^2}{2}} = \dfrac{H}{3}$

Horizontal force = pressure at centroid depth × area

$$F = \left(\rho_C g \frac{H}{3}\right)\left(\frac{1}{2}BH\right) = \frac{1}{6}\rho_C g B H^2$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Blake–Kozeny Equation

$$\frac{p_1 - p_2}{L} = 150 \frac{\mu v_0}{D_p^2} \frac{(1-\varepsilon)^2}{\varepsilon^3}$$

Check dimensions

$$\frac{M}{LT^2}\ \frac{1}{L} \qquad \frac{M}{LT}\ \frac{L}{T}\ \frac{1}{L^2} = \frac{M}{L^2 T^2}$$

Same, hence ε is dimensionless. Also, examination of $(1-\varepsilon)$ gives same conclusion assuming "1" is dimensionless.

Numerical values

$$\frac{\varepsilon^3}{(1-\varepsilon)^2} = \frac{150 \mu v_0 L}{(p_1 - p_2) D_p^2} = \frac{150 \times 0.22 \times 0.1 \times 6 \times 30.48}{453.6 \times 75 \times 0.1^2 \times 32.2}$$

$\frac{g}{cm\,s}$ $\frac{ft}{s}$ $\frac{cm}{ft^2}$ — $\frac{g}{lbm}$ $\frac{lbf}{in^2}$ in^2 $\frac{lbm\,ft}{lbf\,s^2}$

$$= 0.05509$$

Rearrange to $\varepsilon = f(\varepsilon) = [0.05509 \times (1-\varepsilon)^2]^{1/3}$

Successive substitution

i	ε_i	$f(\varepsilon_i)$
1	0.5000	0.2397
2	0.2397	0.3170
3	0.3170	0.3014
4	0.3014	0.2996
5	0.2996	0.3001
6	0.3001	0.3000

Porosity (void fraction)

$\varepsilon = 0.300$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

1.35

Sheat Stresses for Air and Water

Viscosity of air

$$\mu_a = \mu_0 \left(\frac{T}{T_0}\right)^n = 0.0171 \left(\frac{293}{273}\right)^{0.768} = 0.0181 \text{ cP}$$

Viscosity of water

$$\mu_w = e^{a + b \ln T} = e^{29.76 - 5.24 \ln 293} = 1.00 \text{ cP}$$

Stresses

Air $\quad \tau_a = \mu_a \frac{V}{h} = 0.01 \times 0.0181 \times \frac{1}{0.1} = 0.00181 \frac{\text{dynes}}{\text{cm}^2}$

Water $\quad \tau_w = \mu_w \frac{V}{h} = 0.01 \times 1.0 \times \frac{1}{0.1} = 0.1 \frac{\text{dynes}}{\text{cm}^2}$

Ratio of stresses

$$\frac{\tau_w}{\tau_a} = \frac{0.1}{0.00181} = 55.2 \quad \left(= \frac{\mu_w}{\mu_a}\right)$$

At higher temperature

Air: μ_a increases, and so does τ_a


Water: μ_w and hence τ_w decrease

The sheat stress τ is uniform across the gap because the velocity profile is linear (a situation itself due to zero applied pressure gradient).

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.1

Evacuation of Leaking Tank

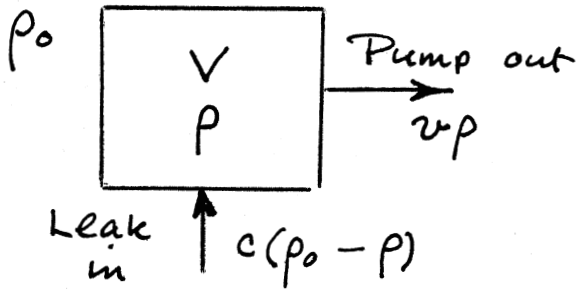

Transient Mass Balance

$$-v\rho + c(\rho_0 - \rho) = \frac{d}{dt} V\rho = V\frac{d\rho}{dt}$$

Separate variables and integrate:

$$\int_0^t dt = V\int_{\rho_0}^{\rho} \frac{d\rho}{c\rho_0 - (c+v)\rho} \quad \text{or} \quad t = \frac{-V}{c+v} \ln[c\rho_0 - (c+v)\rho]\Big|_{\rho_0}^{\rho}$$

$$t = \frac{V}{c+v} \ln \frac{-v\rho_0}{c\rho_0 - (c+v)\rho} = \frac{V}{c+v} \ln \frac{v\rho_0}{(c+v)\rho - c\rho_0}$$

$$= \frac{V}{c+v} \ln \frac{1}{\left(1+\frac{c}{v}\right)\frac{p}{p_0} - \frac{c}{v}}$$

since $\rho = \frac{Mp}{RT}$ and T is constant

Lowest attainable pressure

As $t \to \infty$ $\quad \underbrace{\left(1+\frac{c}{v}\right)}_{1.01}\frac{p^*}{p_0} = \underbrace{\frac{c}{v}}_{0.01}$

$c = 10^{-5}\ m^3/s$

$v = 10^{-3}\ m^3/s$

$$p^* = \frac{0.01}{1.01} \times 1 = \underline{\underline{0.00990 \text{ bar}}}$$

Time to fall half way to p^*, to $p = \frac{1 + 0.00990}{2}$


$$= 0.50495 \text{ bar}$$

$$t = \frac{1}{0.00101} \ln \frac{1}{1.01 \times 0.50495 - 0.01}$$

$$= \underline{\underline{686.3 \text{ s}}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.2
Slowed Traffic

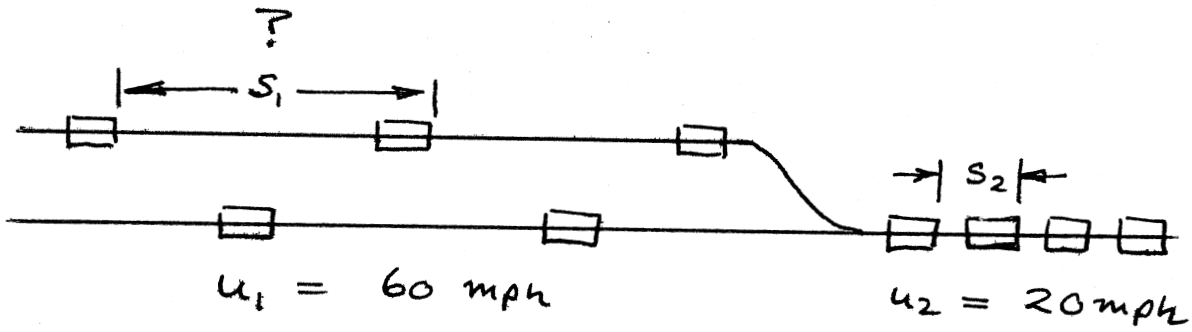

Continuity of Cars

"m" = $2 u_1 \rho_1 = u_2 \rho_2$

where $\rho_2 = \frac{1}{s_2} = \frac{1}{25} = 0.04 \frac{\text{cars}}{\text{ft}}$

Hence $\rho_1 = \frac{1}{2} \frac{u_2}{u_1} \rho_2 = \frac{1}{2} \frac{20}{60} \times 0.04 = 0.00667$

$$s_1 = \frac{1}{\rho_1} = \frac{1}{0.00667} = \underline{150 \text{ ft}}$$

"Flow rate" of cars

$$m = u_2 \rho_2 = 20 \times 0.04 \times 5280 \ \frac{\text{mile}}{\text{hr}} \frac{\text{cars}}{\text{ft}} \frac{\text{ft}}{\text{mile}}$$


$$= 4,224 \ \frac{\text{cars}}{\text{hr}}$$

$$= 1.173 \ \frac{\text{cars}}{\text{sec}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.3

"Density" of Cars

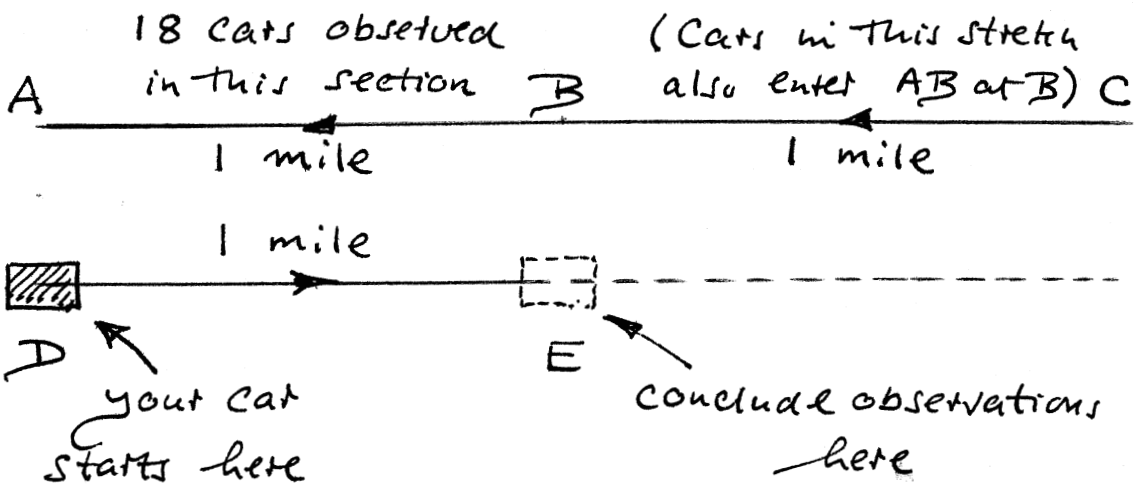

The cars you see in the mile between AB includes those in AB when you started at D plus those crossing into AB from BC.

Assume average speed for opposite lane is also 65 mph. Hence BC is also one mile, and a car starting at C reaches B just as you reach E.


Thus the 18 cars you observe originate from two miles of highway (AB + BC)

Hence car density $= \frac{18}{2} =$ 9 per mile

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.4

Ethylene Pipeline

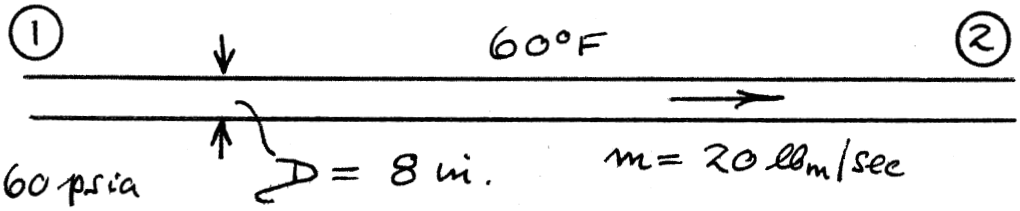

Ethylene C_2H_4 $MW = 28$

Cross-Sectional Area $A = \frac{\pi}{4}\left(\frac{8}{12}\right)^2 = 0.349\ ft^2$

Densities $\rho = \frac{Mp}{RT}$

$\rho_1 = \frac{28 \times 60}{10.73 \times 520} = 0.301\ lb_m/ft^3$

$\rho_2 = \frac{25}{60} \times 0.301 = 0.125$

Flow rate $m = \rho u A$ (Q)


Velocities $u_1 = \frac{m}{\rho_1 A} = \frac{20}{0.301 \times 0.349} = 190.4\ ft/sec$

$u_2 = \frac{m}{\rho_2 A} = \frac{20}{0.125 \times 0.349} = 458.4\ ft/sec$

Pressure falls because of pipe friction (for subsonic flow, at any rate).

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Transient Behavior of a Stirred Tank

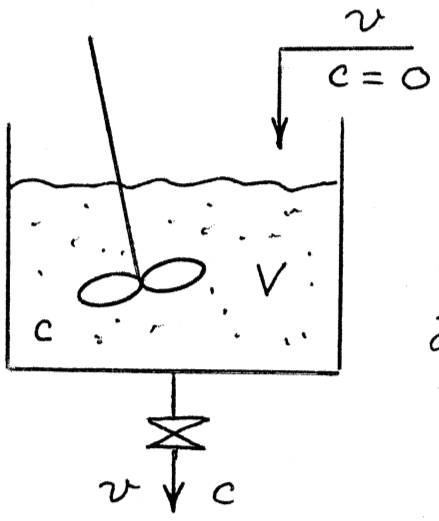

$V = 2\ m^3$ (constant)

$v = 0.01\ \frac{m^3}{s}$ (constant)

Unsteady-state mass balance for sodium chloride on the tank as system

Inlet	−	Exit
$v \times 0$	−	vc

= Rate of accumulation

$$\frac{d}{dt}(Vc) = V\frac{dc}{dt}$$

Separate variables and integrate

$$\int_{c_0}^{c}\frac{dc}{c} = -\frac{v}{V}\int_0^t dt \qquad \text{or} \qquad \ln\frac{c}{c_0} = -\frac{vt}{V}$$

$$c = c_0 e^{-vt/V}$$


Required time

$c_0 = 1\ kg/m^3$

$c_f = 0.0001\ kg/m^3$

$$t_f = -\frac{V}{v}\ln\frac{c_f}{c_0}$$

$$= -\frac{2}{0.01}\ln\frac{0.0001}{1}$$

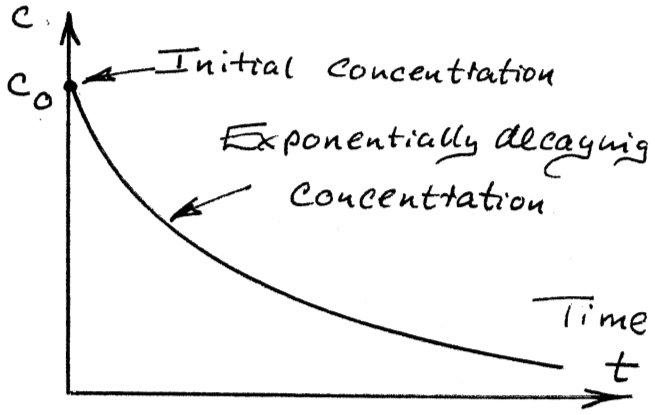


$t_f = 1,842\ s = \underline{30\ m\ 42\ s}$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Stirred Tank with Crystal Dissolution

Choose the system to exclude the solid salt in the tank. Then perform a rate balance for mass of salt

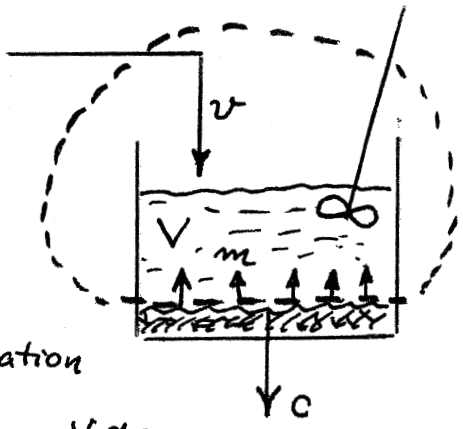

$$\text{Entering} - \text{leaving} = \text{accumulation}$$

$$m - vc = \frac{d}{dt}(Vc) = V\frac{dc}{dt}$$

↑ since V is constant.


Separate variables and integrate

$$\int_{c_0}^{c} \frac{dc}{\frac{m}{v} - c} = \frac{v}{V}\int_0^t dt$$

$$-\ln\left(\frac{m}{v} - c\right)\Big|_{c_0}^{c} = \frac{vt}{V} \quad \text{or} \quad \ln\frac{m - vc}{m - vc_0} = -\frac{vt}{V}$$

$$m - vc = (m - vc_0)e^{-\frac{vt}{V}}$$

$$c = \frac{m}{v} - \left(\frac{m}{v} - c_0\right)e^{-\frac{vt}{V}}$$

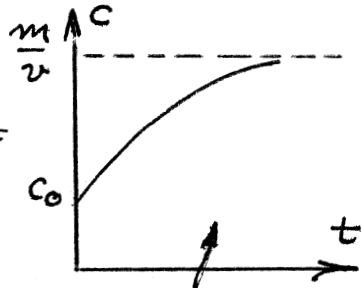

c is its steady-state value m/v, less a deviation that decreases exponentially with time.


$m = 0.02$ kg/s
$v = 0.01$ m³/s
$V = 2$ m³
$c_0 = 1$ kg/m³

t (sec)	c (kg/m³)
0	1.000
10	1.049
100	1.393
∞	2.000


Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.7-1

Soaker Garden Hose

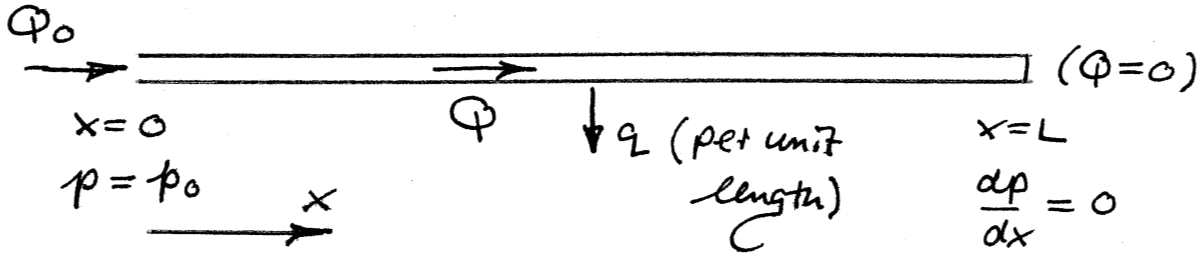

Perform mass balance on element dx

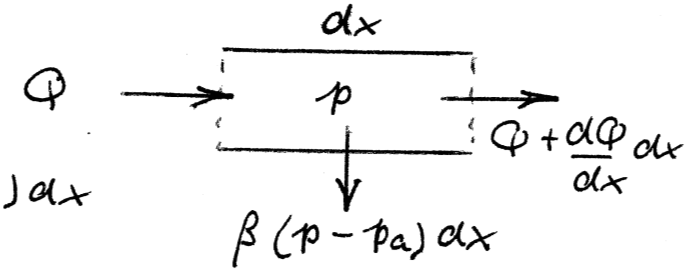

$$Q = Q + \frac{dQ}{dx}dx + \beta(p-p_a)dx$$

$$-\frac{dQ}{dx} = \alpha\frac{d^2p}{dx^2} = \beta(p-p_a)$$

Substitute $P = p - p_a$, $\frac{\beta}{\alpha} = \gamma^2$ gives $\frac{d^2P}{dx^2} = \gamma^2 P$

Try $P = A\sinh\gamma x + B\cosh\gamma x$

$$\frac{dP}{dx} = \gamma A\cosh\gamma x + \gamma B\sinh\gamma x$$

$$\frac{d^2P}{dx^2} = \gamma^2 A\sinh\gamma x + \gamma^2 B\cosh\gamma x = \gamma^2 P \quad \text{OK}$$

Boundary Conditions

$x=0$ $\quad P = p_0 - p_a = B$ $\quad (\sinh 0 = 0,\ \cosh 0 = 1)$

$x=L$ $\quad \frac{dP}{dx} = \gamma A\cosh\gamma L + \gamma\underbrace{(p_0-p_a)}_{B}\sinh\gamma L = 0$

Hence $A = -(p_0-p_a)\dfrac{\sinh\gamma L}{\cosh\gamma L}$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

The pressure distribution as a function of x is then:

$$\frac{P}{p_0 - p_a} = \frac{p - p_a}{p_0 - p_a} = -\frac{\sinh \gamma L}{\cosh \gamma L} \sinh \gamma x + \cosh \gamma x$$

$$= \frac{\cosh \gamma (L - x)}{\cosh \gamma L}$$

Rate of loss of water can be obtained by integration

$$Q_{loss} = \int_0^L \beta (p - p_a) \, dx$$

since $p - p_a$ is known now as a function of x.

A somewhat easier approach is to note that $Q_{loss} = Q_0$, the water rate entering the hose:

$$Q_0 = -\alpha \left(\frac{dp}{dx} \right)_{x=0} = -\alpha \gamma \left(A \underbrace{\cosh \gamma x}_{1} + B \underbrace{\sinh \gamma x}_{0} \right)_{x=0}$$


$$= -\alpha \gamma (-)(p_0 - p_a) \frac{\sinh \gamma L}{\cosh \gamma L}$$

$$Q_0 = \alpha \gamma (p_0 - p_a) \tanh \gamma L = Q_{loss}.$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Sketch of pressure distribution


Note $\gamma = \sqrt{\beta/\alpha}$, so a low value of γ means a relatively low leakage rate, and a high value of γ means a relatively high leakage rate

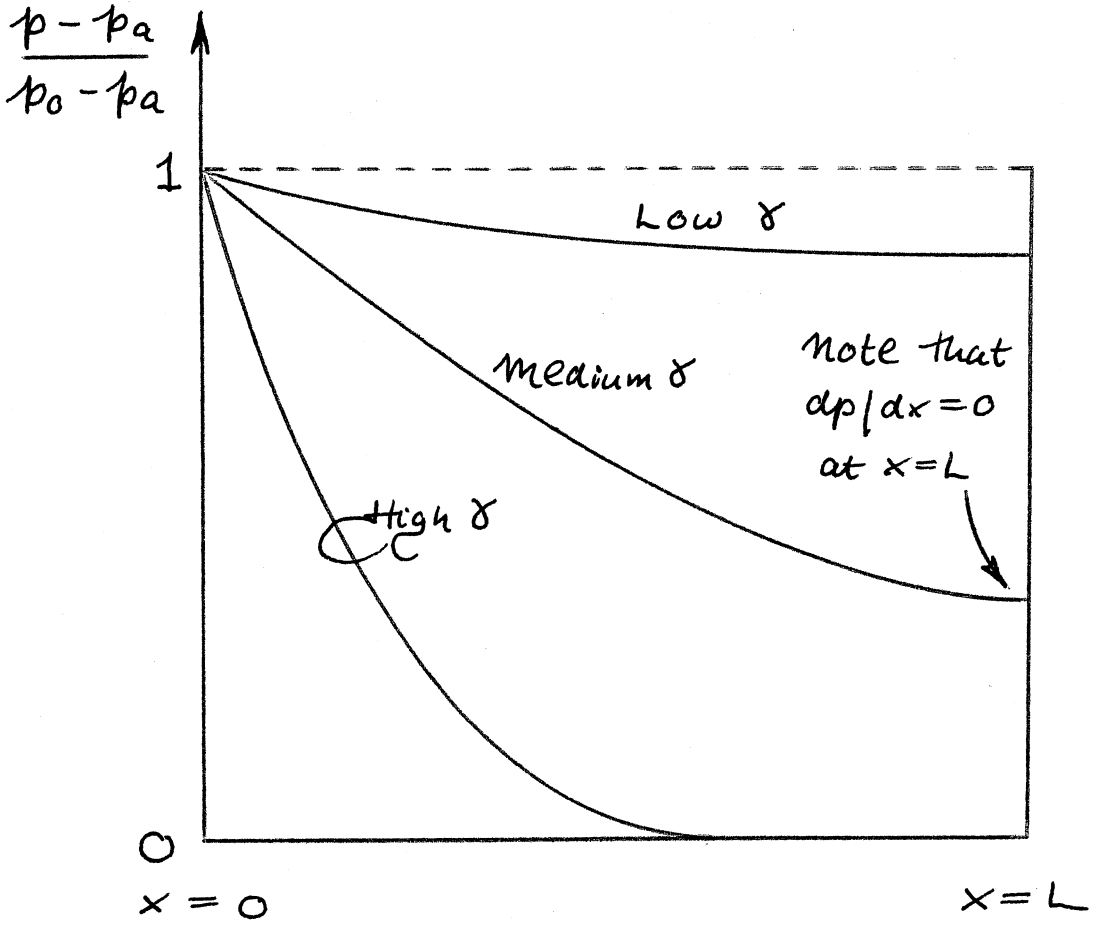

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.8-1

Performance of a Siphon

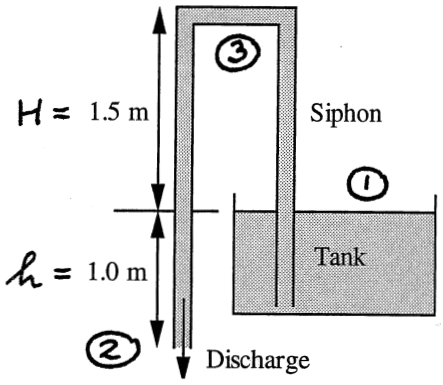

Bernoulli ① → ② (ignoring friction)

$$\frac{u_1^2}{2} + \frac{p_1}{\rho} + g z_1 = \frac{u_2^2}{2} + \frac{p_2}{\rho} + g z_2$$

zero zero zero zero $-h$

$$u_2 = \sqrt{2gh} = \sqrt{2 \times 9.81 \times 1.00} = \underline{\underline{4.43 \text{ m/s}}}$$

Lowest pressure occurs at point 3 at the top

Bernoulli ① → ③

$$\frac{u_1^2}{2} + \frac{p_1}{\rho} + g z_1 = 0 = \frac{u_3^2}{2} + \frac{p_3}{\rho} + gH$$

Continuity ③ → ②

$$A u_3 = A u_2$$

$$u_3 = u_2$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Hence the lowest pressure is:

$$p_3 = -\rho\left(\frac{u_2^2}{2} + gH\right)$$

$$= -10^3\left(\frac{4.43^2}{2} + 9.81 \times 1.5\right)$$

$$= -2.45 \times 10^4 \text{ Pa}$$

$$= -0.245 \text{ bar (gauge)}$$


Yes, the answers are reasonable. The velocity of 4.43 m/s is typical for pipe flow, although in practice it would be reduced somewhat because of friction. Also, $p_3 \doteq 11.0$ psia, which is well above the vapor pressure of water at room temperature ($p_v = 0.363$ psia at 70°F), so vapor-lock will not occur.

The indicated draining time of $t = V/vA$ would only be true for constant velocity v. However, as the level in the tank falls, so does v, so $t = V/vA$ is not true.

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.9

Pitot Tube

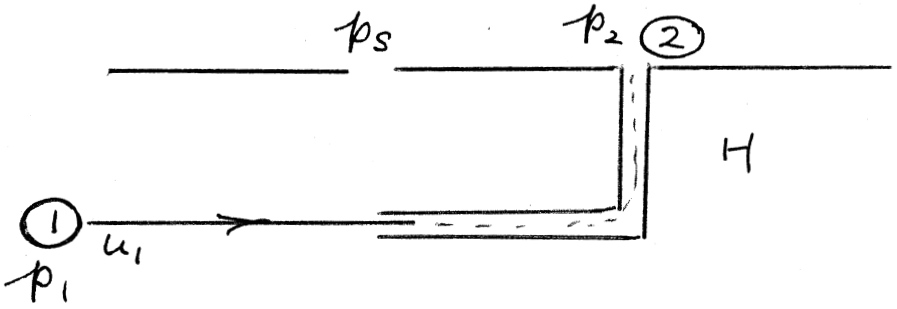

Bernoulli $\quad \frac{u_1^2}{2} + \frac{p_1}{\rho} = \frac{p_2}{\rho} + gH$

But $p_1 = p_s + \rho g H$

$$\frac{u_1^2}{2} + \frac{p_s + \rho g H}{\rho} = \frac{p_2}{\rho} + gH$$

Hence $\quad u_1 = \sqrt{\frac{2(p_2 - p_s)}{\rho}}$

Sea Water

(a) $\quad u_1 = \sqrt{\frac{2 \times 2.5 \times 144 \times 32.2}{64}} = 19.03 \text{ ft/sec}$

$= 12.98 \text{ mph}$

Fresh Water

(b) $\quad u_1 = \sqrt{\frac{2 \times 2.5 \times 144 \times 32.2}{62.4}} = 19.28 \text{ ft/sec}$

$= 13.14 \text{ mph}$


Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.10

Leaking Carbon Dioxide

Apply Bernoulli ① → ②

for two different paths

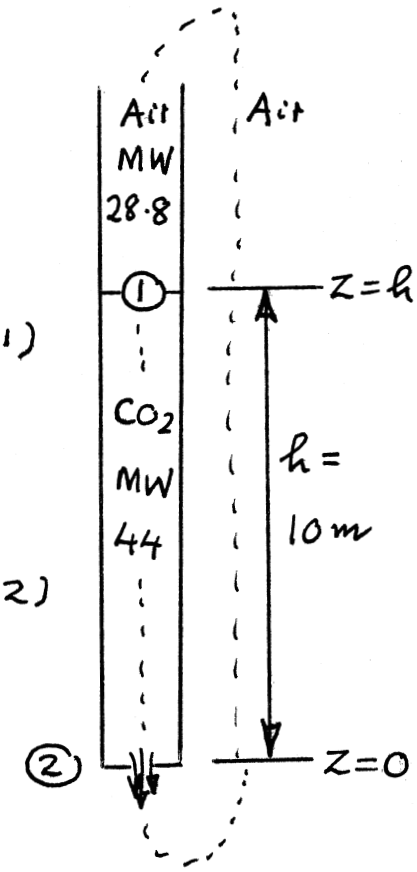

Carbon dioxide

$$\frac{u_1^2}{2} + \frac{p_1}{\rho_{CO_2}} + gh = \frac{u_2^2}{2} + \frac{p_2}{\rho_{CO_2}} \qquad (1)$$

Air

$$\frac{u_1^2}{2} + \frac{p_1}{\rho_A} + gh = 0 + \frac{p_2}{\rho_A} + 0 \qquad (2)$$

Neglect $u_1^2 \ll u_2^2$

From (1) $\frac{u_2^2}{2} = \frac{1}{\rho_{CO_2}}(p_1 - p_2) + gh$

From (2) $(p_1 - p_2) = -\rho_A g h$

Hence $\frac{u_2^2}{2} = gh\left(1 - \frac{\rho_A}{\rho_{CO_2}}\right)$


$$u_2 = \sqrt{2 \times 9.81 \times 10\left(1 - \frac{28.8}{44}\right)}$$

$$= \underline{\underline{8.23 \text{ m/s}}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.11

Two Pressure Gauges

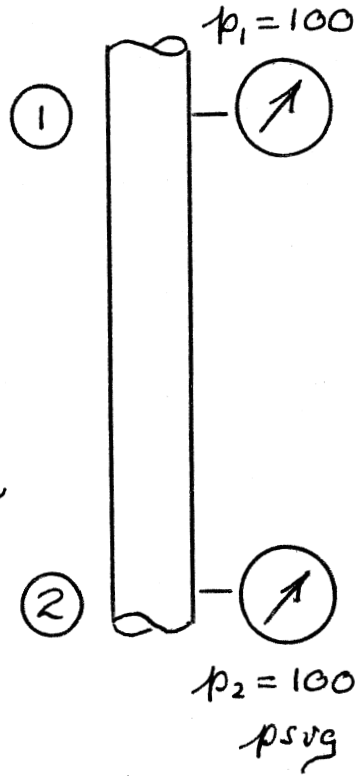

(a) If the water were not flowing, p_2 would be much higher than p_1, because of the hydrostatic effect.

However, this is not the case, therefore, the water must be flowing

(b) If the water were flowing upwards, say with $p_2 = 100$, then p_1 would be lower on two counts:

(i) Hydrostatic effect

(ii) Pipe friction.

However, $p_1 \neq p_2$. Therefore, the water cannot be flowing upwards, and must be flowing downwards.

(c) Check on conclusion of (b) by using overall energy balance from (1) to (2) with $W = 0$ and $\Delta(u^2/2) = 0$:

$$g(z_2 - z_1) + \frac{p_2 - p_1}{\rho} + \mathcal{F} = 0$$


Since $p_1 = p_2$, $\quad \mathcal{F} = g(z_1 - z_2)$

Both sides are positive and equal. That is, the hydrostatic or potential energy is exactly consumed by pipe friction.

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.12

Venturi "Meter"

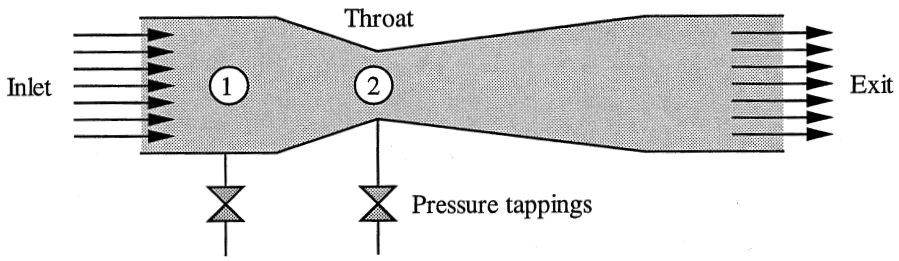

Bernoulli ① → ② $\frac{u_1^2}{2} + \frac{p_1}{\rho} = \frac{u_2^2}{2} + \frac{p_2}{\rho}$

Continuity ① → ② $A u_1 = a u_2$

Eliminate u_2 gives $\frac{p_1 - p_2}{\rho} = \frac{u_1^2}{2}\left(\frac{A^2}{a^2} - 1\right)$

Flow rate $Q = A u_1 = C_D A \sqrt{\frac{2(p_1 - p_2)}{\rho\left(\frac{A^2}{a^2} - 1\right)}} = C_D A \sqrt{\frac{2(\rho_M - \rho_I) g \Delta h}{\rho_I \left(\frac{A^2}{a^2} - 1\right)}}$

M = mercury I = isopentane

Substituting numbers, $A = \frac{\pi}{4}\left(\frac{6}{12}\right)^2 = 0.196\ ft^2$, $C_D = 0.98$

$$Q = 0.98 \times 0.196 \sqrt{\frac{\overbrace{2(13.57 \times 62.4 - 38.75) \times 32.2 \times \left(\frac{20}{12}\right)}^{\alpha}}{38.75\left(\frac{6^4}{3^4} - 1\right)}}$$

$$= 0.98 \times 0.196 \times 12.22 = 2.35\ ft^3/sec$$

$$= 1053\ gpm$$


$$p_1 - p_2 = \frac{\alpha}{32.2 \times 144} = 9.35\ psi$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.13

Orifice Plate

Use the orifice-plate equation $u_1 = C_D \sqrt{\dfrac{2(p_1 - p_2)}{\rho\left(\dfrac{A_1^2}{A_0^2} - 1\right)}}$

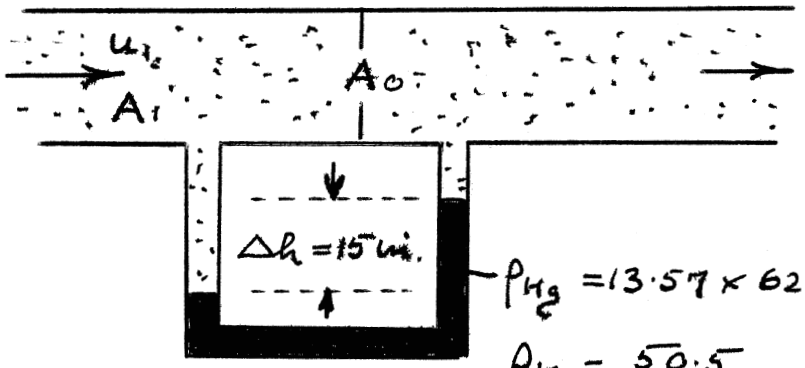

$\rho_{Hg} = 13.57 \times 62.4 = 847$

$\rho_K = 50.5$

$A_1 = \dfrac{\pi}{4}\left(\dfrac{2}{12}\right)^2 = 0.0218 \text{ ft}^2$, $u_1 = \dfrac{560}{60 \times 50.5 \times 0.0218} = 8.48 \dfrac{\text{ft}}{\text{sec}}$

For most orifice plates, $C_D \doteq 0.62$, which can be used as first trial.

$$8.48 = 0.62 \sqrt{\frac{2 \times \frac{15}{12}(847 - 50.5) \times 32.2}{50.5\left(\frac{A_1^2}{A_0^2} - 1\right)}}$$

whence

$$\frac{A_1}{A_0} = \frac{D_1^2}{D_0^2} = 2.79 \qquad \frac{D_1}{D_0} = 1.67 \qquad D_0 = 1.2 \text{ in dia.}$$

Check on value of C_D

$$Re_0 = \frac{D_1}{D_0} Re_1 = \frac{1.67 \times 8.48 \times 50.5 \times \frac{2}{12}}{3.18 \times \frac{1}{3600}} = 1.35 \times 10^5$$

(u_1, ρ, D_1 / D_1/D_0, μ)

From chart, for $\dfrac{D_0}{D_1} = 0.60$, $Re = 1.35 \times 10^5$

$C_D = 0.62$ Assumption was OK


Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.14

Tank Draining

From lecture notes

$$u_2 = \sqrt{2gh}$$

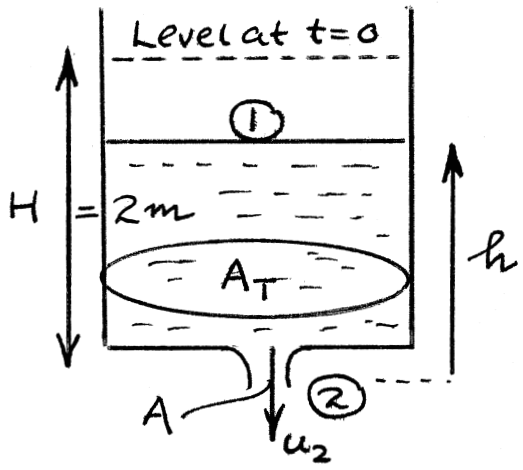

Mass Balance on Acetone in the Tank


$$-\sqrt{2gh}\,A = \frac{d}{dt}(hA_T) = A_T\frac{dh}{dt} \quad \text{or} \quad \int_0^t dt = -\frac{A_T}{A}\frac{1}{\sqrt{2g}}\int_H^0 \frac{dh}{\sqrt{h}}$$

Draining time

$$t = +\frac{A_T}{A}\frac{1}{\sqrt{2g}}\,2\sqrt{h}\Big|_0^H = \frac{D_T^2}{D_0^2}\sqrt{\frac{2H}{g}}$$

$$t = \left(\frac{1}{0.02}\right)^2\sqrt{\frac{2\times 2}{9.81}} = 1596\ s = \underline{26m\ 36s}$$

At sharp-edged orifice, nothing changes except the area ratio, which is now

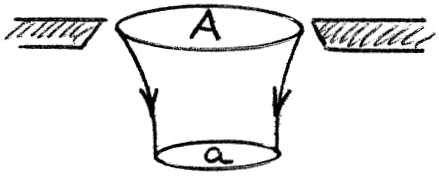

$$\frac{A_T}{a} = \frac{1^2}{0.02^2\times 0.63}$$, so the time increases by a factor of $\frac{1}{0.63} = 1.59$

$$t = 2533\ s = 42m\ 13s$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.15

Draining Immiscible Liquids from a Tank

From hydrostatics,


$$p_2 = \rho_o g H$$

Bernoulli ② → ③

$$\frac{p_2}{\rho_w} + gh = \frac{u_3^2}{2}$$

Hence

$$u_3 = \sqrt{2g\left(\frac{\rho_o}{\rho_w} H + h\right)}$$

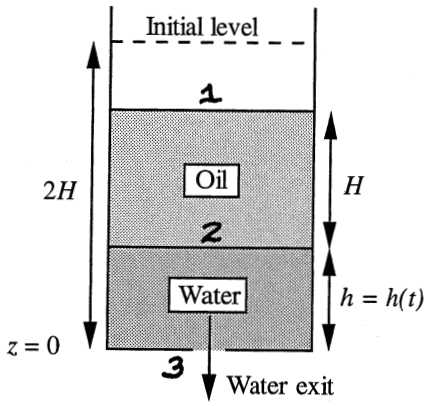

Unsteady-State Mass Balance on Tank (Rate balance)

$$-0.62\,a\,u_3\,\rho_w = -0.62\,a\,\rho_w\sqrt{2g\left(\frac{\rho_o}{\rho_w} H + h\right)} = A\,\rho_w\,\frac{dh}{dt}$$

Leaving through orifice

Rate of accumulation of water in tank (will be negative, but don't anticipate this with a minus sign)


$$\int_0^t dt = -\frac{A}{0.62\,a\sqrt{2g}} \int_H^0 \frac{dh}{\sqrt{\frac{\rho_o}{\rho_w} H + h}} \qquad B = 1$$

$$t = \frac{2A}{\sqrt{2g}\,0.62\,a}\left[\sqrt{\frac{\rho_o}{\rho_w} H + h}\right]_0^H$$

$$t = \frac{2A}{0.62\,a\sqrt{2g}}\left[\sqrt{H\left(\frac{\rho_o}{\rho_w} + 1\right)} - \sqrt{\frac{\rho_o}{\rho_w} H}\right]$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Draining a Horizontal Cylindrical Tank

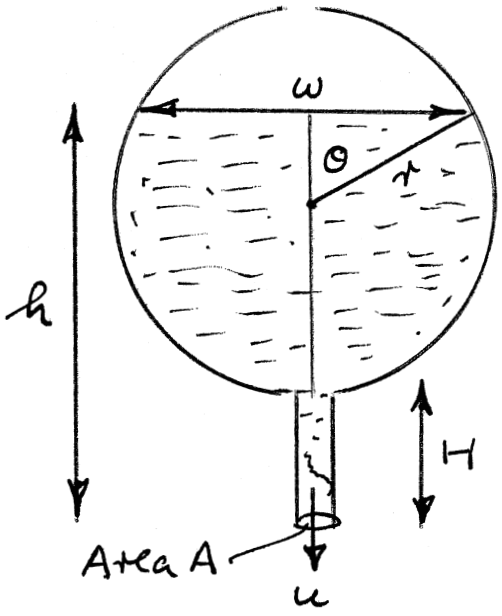

From geometry

$$h = H + r(1+\cos\theta) \quad (1)$$

$$w = 2r\sin\theta \quad (2)$$

From Bernoulli

$$u = \sqrt{2gh} \quad (3)$$

Volume balance

In time dt, a volume dV leaves the tank

$$dV = uA\,dt = -wL\,dh \quad (4)$$

From (1), $dh = -r\sin\theta\,d\theta$ (5)

Hence, from (2), (3), (4), and (5):

$$\sqrt{2g[H+r(1+\cos\theta)]}\,A\,dt = -2r\sin\theta L(-r\sin\theta\,d\theta)$$


Separate variables and integrate

$$\int_0^t dt = t = \frac{2r^2L}{A\sqrt{2g}} \underbrace{\int_0^{\pi} \frac{\sin^2\theta\,d\theta}{\sqrt{H+r(1+\cos\theta)}}}_{I}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Simpson's Rule

$$\int_a^b f(x)dx \doteq \frac{h}{3}(f_0 + 4f_1 + f_2)$$

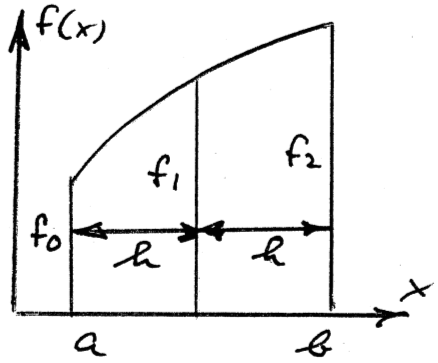

Approximate I by two applications of Simpson's rule, $h = \pi/4$

$$I \doteq \frac{\pi/4}{3}\left[0 + 4\frac{\sin^2 \pi/4}{\sqrt{2+\cos \pi/4}} + 2\frac{\sin^2 \pi/2}{\sqrt{2+\cos \pi/2}} + 4\frac{\sin^2 3\pi/4}{\sqrt{2+\cos 3\pi/4}} + 0\right]$$

$$= \frac{\pi}{12}(1.216 + 1.414 + 1.759) = 1.149 \ m^{-1/2}$$

(One application of Simpson's rule gives $I \doteq 1.148$)

Required area is

$$A = \frac{2t^2 L I}{t\sqrt{2g}} = \frac{2 \times 1^2 \times 5 \times 1.149}{3600 \times \sqrt{2 \times 9.81}} = \underline{\underline{0.000721 \ m^2}}$$

Diameter of tail pipe $A = \frac{\pi d^2}{4}$

$$d = \sqrt{\frac{4A}{\pi}} = \sqrt{\frac{4 \times 0.000721}{\pi}} = 0.0303 \ m$$

$$= \underline{\underline{3.03 \ cm}}$$

Is this answer reasonable?

When $\theta = \pi/2$, $h = 2$, $u = \sqrt{2 \times 9.81 \times 2} = 6.26 \ m/s$


At this rate for 1 hr, $V = 6.26 \times 0.000721 \times 3600$

$= 16.3 \ m^3$

Tank volume $= \frac{\pi}{4}(2t)^2 L = \frac{\pi}{4}(2 \times 1)^2 \times 5 = 15.7 \ m^3$ } OK

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual


Lifting Silicon Wafers

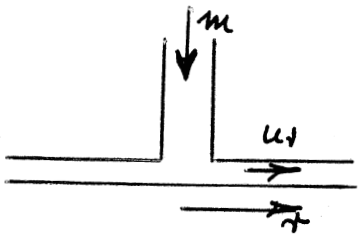

Mass Balance

$$m = 2\pi r H \rho u_r$$

$$u_r = \frac{m}{2\pi r H \rho}$$

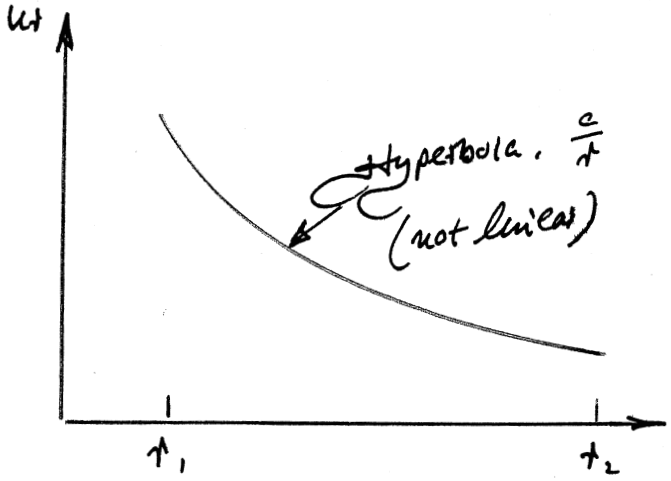


Bernoulli's Equation

$$\frac{u_r^2}{2} + \frac{p}{\rho} = \frac{u_2^2}{2} + \frac{p_2}{\rho}$$

$$p = p_2 - \frac{\rho}{2}\underbrace{(u_r^2 - u_2^2)}_{\text{positive}}$$

Hence $p < p_2$ and there is a partial vacuum between the flange and wafer, which is therefore picked up.

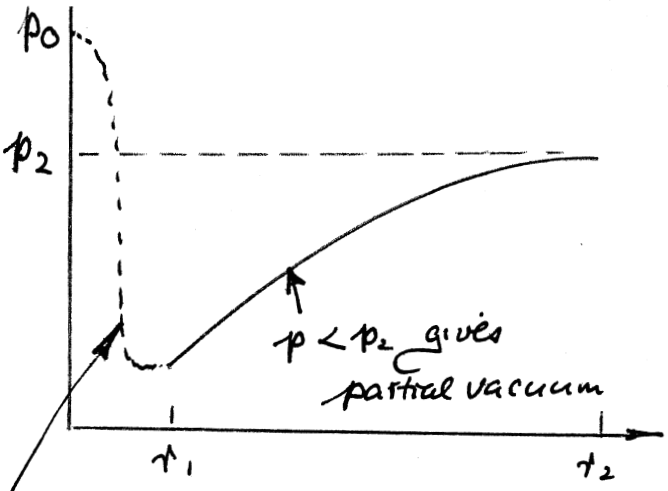

Reduction in pressure from p_0 as air accelerates into gap.

Total Force upwards on Wafer


$$F = \int_0^{r_2} (p_2 - p)\, 2\pi r\, dr.$$

Will be positive, so the device is OK for picking up the wafer

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.18

Rocket Performance

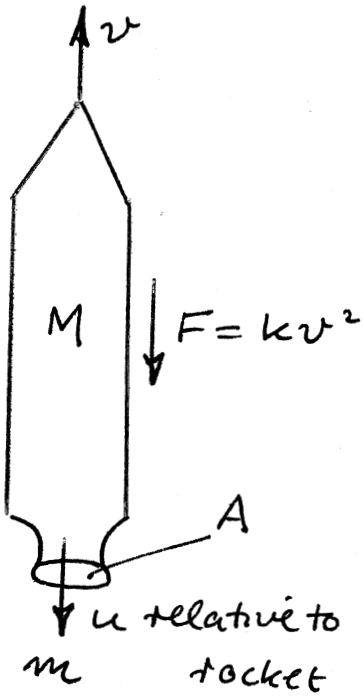

(a) Absolute downwards velocity of propellant $= u - v$

(b) Momentum flux $= m(u-v)$

(c) Mass M is decreasing:

$$\frac{dM}{dt} = -m \quad \text{or} \quad M = M_0 - mt$$

(M_0 is initial mass, and this equation holds until all the propellant has been ejected)

(d) Upwards momentum balance on moving rocket

$$-Mg \quad -kv^2 \quad \underset{\uparrow}{-} \quad \underset{\uparrow}{-} \quad m(u-v) = \frac{d}{dt}(Mv)$$

gravity, drag, loss, negative direction

$$= M\frac{dv}{dt} + v\frac{dM}{dt}$$

$$= M\frac{dv}{dt} - mv$$


Hence

$$\frac{dv}{dt} = -g + \frac{1}{M_0 - mt}(mu - kv^2)$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.19

Jet Airplane

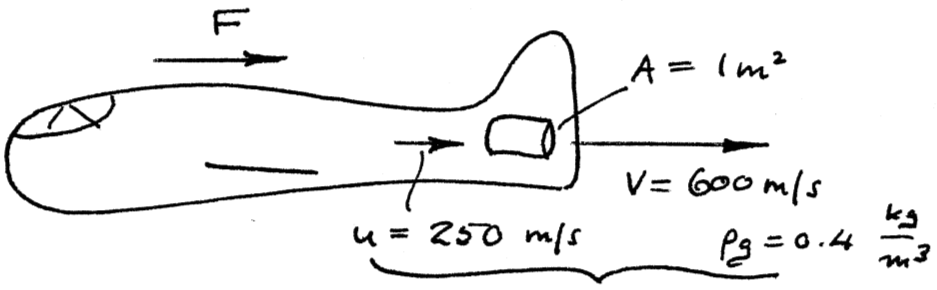

(a) mass flow rate

$$\dot{m} = \rho_g V A = 0.4 \times 600 \times 1 = \underline{240 \text{ kg/s}}$$

(b) momentum balance (as seen by the pilot — this corresponds to a "stationary airplane with air flowing past it)

$$\underset{\text{Flow in}}{\dot{m}u} - \underset{\text{Flow out}}{\dot{m}v} + \underset{\text{Force}}{F} = 0 \quad (\text{Steady state})$$

$$F = \dot{m}(v-u) = 240(600-250) = \underline{8.4 \times 10^4 \text{ N}}$$

(c) Power may be obtained by different methods, the easiest of which is to note that the engine serves to increase the kinetic energy of the air flowing through it:

$$P = \frac{\dot{m}}{2}(v^2 - u^2) = \frac{240}{2}(600^2 - 250^2) = \underline{3.57 \times 10^7 \text{ W}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual


Jet-Propelled Boat

Control Surface moving with Boat

Momentum balance ←


$m \times 0 \; - \; - \; m(v-u)$

Input from lake | Loss | Negative Jet direction

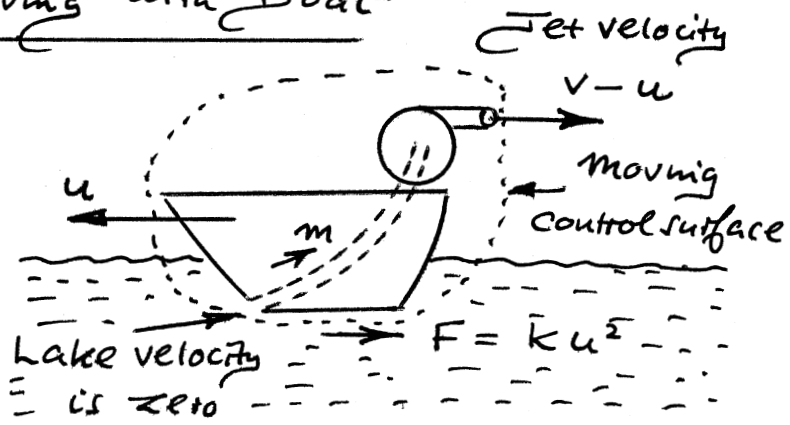

$$-ku^2 = \frac{d}{dt}(Mu) = Ma \quad \text{or} \quad a = \frac{1}{M}\left[m(v-u) - ku^2\right]$$

Fixed Control Surface – Boat + Jet Moving Within it

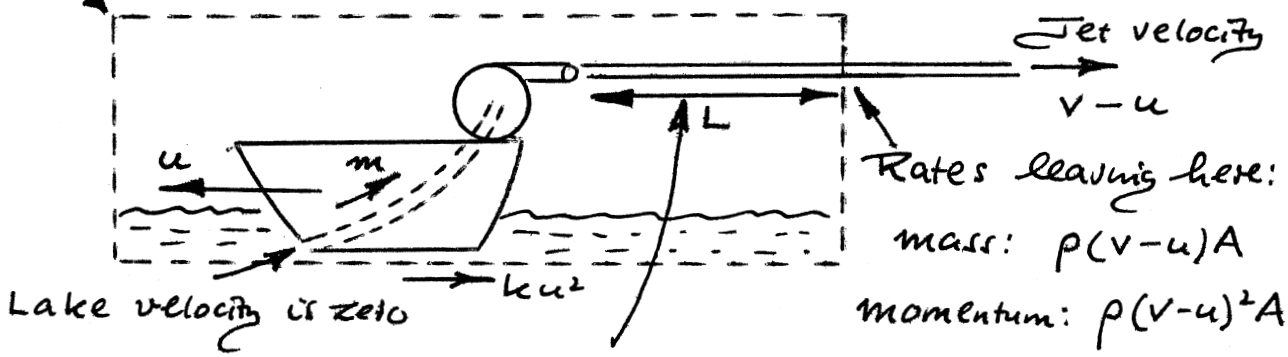

Momentum of this portion of jet = $\rho AL(v-u)$ →

Momentum balance ←

$m \times 0 \; - \; - \rho(v-u)^2 A = \frac{d}{dt} Mu + \frac{d}{dt}\left[-\rho AL(v-u)\right]$

From lake | Leaving with jet

$-ku^2$ (friction)

Also note $m = \rho A v$

$$\rho(v-u)^2 A - ku^2 = Ma - \rho A(v-u)\left(\frac{dL}{dt}\right)$$

$\frac{dL}{dt}$ → This equals u

$$a = \frac{1}{M}\left[\rho A(v-u)(v-u+u) - ku^2\right] = \frac{1}{M}\left[m(v-u) - ku^2\right]$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Numerical Values

At maximum velocity, there is no acceleration, so

$$m(v-u) = Ku^2$$

$$\text{at } K = \frac{m(30-20)}{20^2} = \frac{m}{40}$$

When $u = 10$ ft/sec,

$$a = \frac{1}{M}\left[m(v-u) - Ku^2\right] = \frac{m}{M}\left[(v-u) - \frac{u^2}{40}\right]$$

$$= \frac{374}{1000}\left[(30-10) - \frac{10^2}{40}\right] = 6.55 \text{ ft/sec}$$

Pumping Power for Propelling Boat

Observer on the boat sees a mass flowrate m with kinetic energy per unit mass of $\frac{u^2}{2}$ coming in and $\frac{v^2}{2}$ leaving. Hence

$$P = \frac{m}{2}(v^2 - u^2)$$


[The same result is obtained from the viewpoint of an observer on the shore, who sees power needed to overcome the drag force (Fu), to accelerate water from rest to $(v-u)$ ft/sec ($m\{v-u\}^2/2$), and to increase the kinetic energy of the boat ($\frac{d}{dt} M \frac{u^2}{2} = Mua$)]

Power decreases as u increases because the boat is accelerating less rapidly.

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.21

Branch Pipe

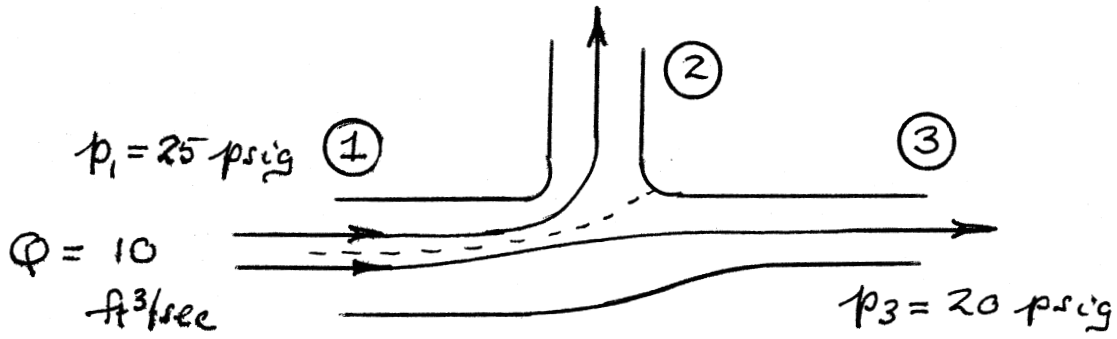

Areas $A_1 = 0.1364$, $A_2 = 0.0873$, $A_3 = 0.0491$ ft²

$$u_1 = \frac{10}{0.1364} = 73.3 \text{ ft/sec}, \quad \rho = 0.8 \times 62.4 = 49.9 \frac{\text{lbm}}{\text{ft}^3}$$

Bernoulli ① → ③ $\quad \frac{u_1^2}{2} + \frac{p_1}{\rho} = \frac{u_3^2}{2} + \frac{p_3}{\rho}$

$$\frac{73.3^2}{2} + \frac{25 \times 32.2 \times 144}{49.9} = \frac{u_3^2}{2} + \frac{20 \times 32.2 \times 144}{49.9}$$

Hence $u_3 = 79.4$ ft/sec

Continuity (Mass Balance) (ρ constant)

$$10 = 0.0873\, u_2 + 0.0491 \times 79.4$$

$$u_2 = 69.9 \text{ ft/sec}$$


Bernoulli ① → ②

$$\frac{73.3^2}{2} + \frac{25 \times 32.2 \times 144}{49.9} = \frac{69.9^2}{2} + \frac{p_2 \times 32.2 \times 144}{49.9}$$

Hence $p_2 = 27.6$ psig. (page 66)

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Sudden Expansion in a Pipe

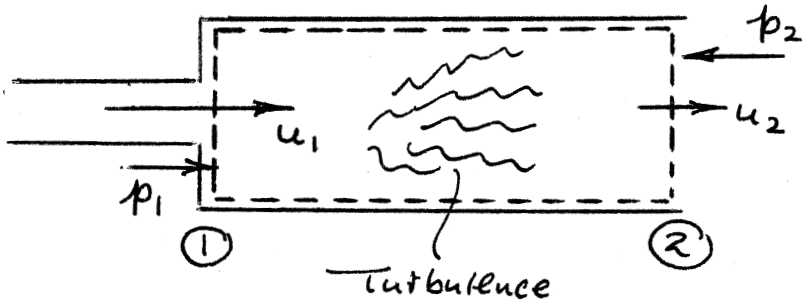

Bernoulli cannot be applied between 1 and 2 because of the turbulence and energy losses that are characteristic of an expanding jet.

Continuity ① → ②

$$A_1 u_1 = A_2 u_2 \qquad (1)$$

Momentum ① → ②

$$p_1 A_2 - p_2 A_2 + \rho A_1 u_1^2 - \rho A_2 u_2^2 = 0 \qquad (2)$$

note ↗

Substitute $u_1 = u_2 \frac{A_2}{A_1}$ from (1) into (2)

$$p_2 - p_1 = \rho u_2^2 \left(\frac{A_2}{A_1} - 1 \right), \qquad (3)$$

which is always positive, so pressure increases. Increase in pressure energy is at the expense of kinetic energy

Overall Energy Balance

zero zero

$$\Delta\left(\frac{u^2}{2}\right) + \frac{\Delta p}{\rho} + g\Delta z + w + \mathcal{F} = 0$$

$$\mathcal{F} = \frac{u_1^2}{2} - \frac{u_2^2}{2} + \frac{p_1 - p_2}{\rho} = \frac{u_1^2}{2} - \frac{u_2^2}{2} + \rho u_2^2 \left(1 - \frac{A_2}{A_1}\right)$$


$$= \frac{u_2^2}{2}\left(\frac{A_2^2}{A_1^2} - 1 + 2 - 2\frac{A_2}{A_1}\right) = \frac{u_2^2}{2}\left(\frac{A_2}{A_1} - 1\right)^2,$$

which is always positive.

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.23

Yotee on Return Elbow

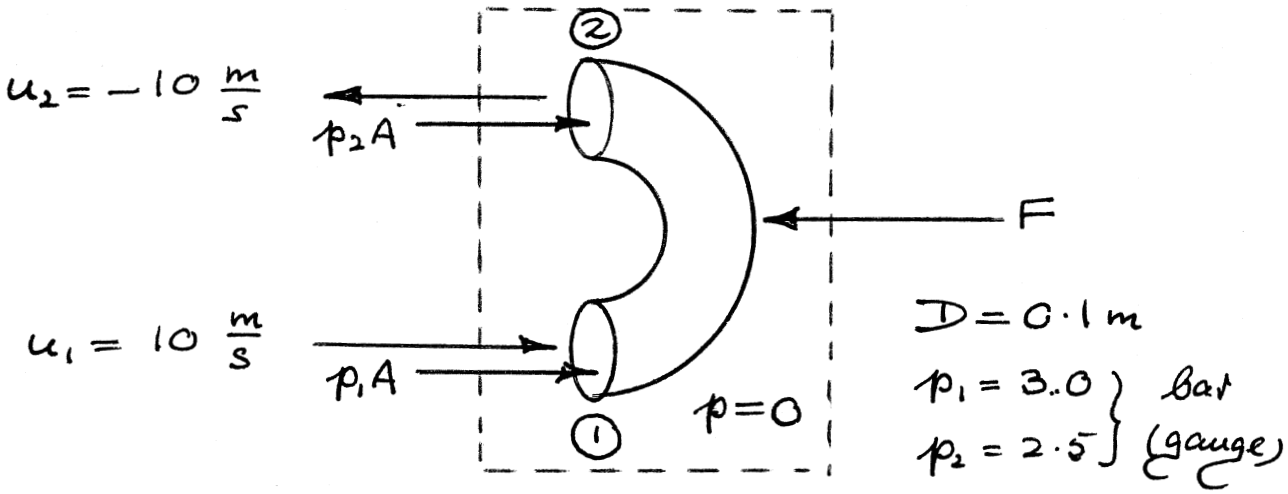

$$A = \frac{\pi D^2}{4} = \frac{\pi (0.1)^2}{4} = 0.00785\ m^2$$

$$m = \rho A u_1 = 1{,}000 \times 0.00785 \times 10 = 78.54\ \frac{kg}{s}$$

$\frac{kg}{m^3}$ m^2 $\frac{m}{s}$

Momentum Balance → on Return Elbow

$$+ mu_1 - mu_2 + p_1 A + p_2 A - F = 0$$

Addition by flow — Loss — Both p_1 and p_2 tend to push elbow to right — Elbow stays put.

$$F = (p_1 + p_2) A + 2mu_1$$

$$= (3.0 + 2.5) \times 10^5 \times 0.00785 + 2 \times 78.54 \times 10$$


$\frac{N/m^2}{Bar}$

$$= 4{,}317 + 1{,}571 = \underline{5{,}888\ N}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Hydraulic Jump


Abrupt, irreversible transition from shallow, rapid stream to deep, tranquil stream.

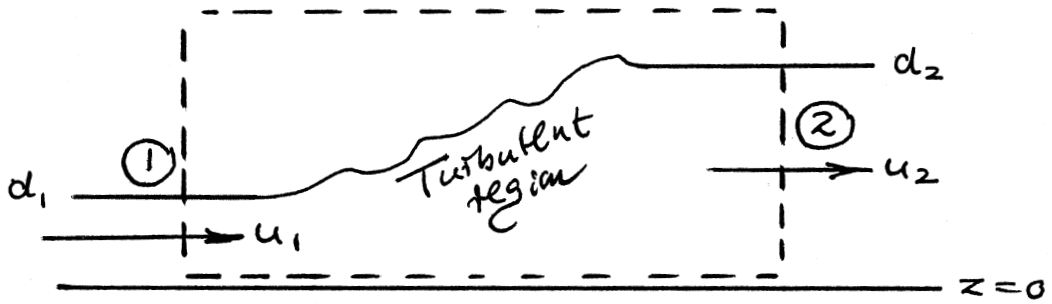

Ignore shear stress exerted by bottom on liquid

Take unit distance normal to the plane of the diagram

Consider pressure at (1) acting on control surface



From earlier notes, total force acting to right is

mean pressure × depth

$$= \frac{0+\rho g d_1}{2} \times d_1 = \rho \frac{g d_1^2}{2}$$

Continuity $\rightarrow$ $u_1 d_1 = u_2 d_2 = \frac{m}{\rho}$ (1)

Momentum Balance

$$m u_1 + \rho \frac{g d_1^2}{2} - m u_2 - \rho \frac{g d_2^2}{2} = 0 \quad (2)$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Eliminating u and u_2

$$\rho u_1^2 d_1 \left(1 - \frac{d_1}{d_2}\right) + \frac{\rho g}{2}\left(d_1^2 - d_2^2\right) = 0$$

Either $d_1 = d_2$ (no change) or

$$-u_1^2 \frac{d_1}{d_2}\left(d_1 - d_2\right) + \frac{g}{2}\left(d_1 - d_2\right)\left(d_1 + d_2\right) = 0$$

$$d_2^2 + d_1 d_2 - \frac{2u_1^2 d_1}{g} = 0 \qquad (3)$$

$$d_2 = \frac{-d_1 \pm \sqrt{d_1^2 + \frac{8u_1^2 d_1}{g}}}{2} \qquad (4)$$

The above equations are satisfied for flow either from L to R or R to L.


u may be determined and is positive for rapid shallow flow becoming deep tranquil flow only, and not vice versa.

Hydraulic jump is similar to a shock wave in a flowing compressible gas (supersonic flow suddenly becomes subsonic, with sudden increase in pressure).

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.24-3

Numbers — Hydraulic Jump

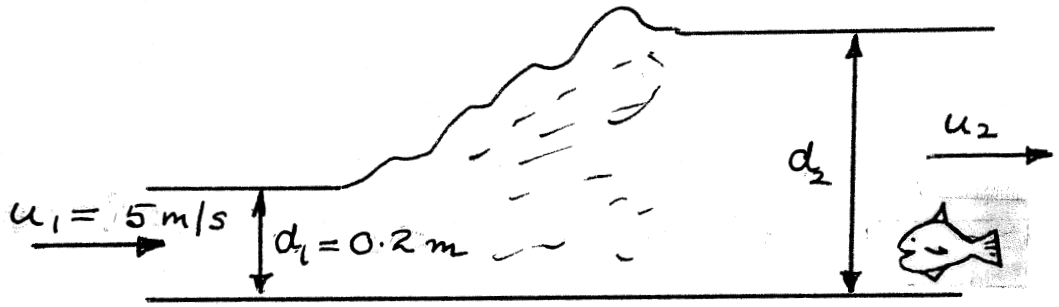

From text: $$d_2 = -\frac{d_1}{2} + \sqrt{\frac{d_1^2}{4} + \frac{2u_1^2 d_1}{g}}$$

$$d_2 = -\frac{0.2}{2} + \sqrt{\frac{0.2^2}{4} + \frac{2 \times 5^2 \times 0.2}{9.81}} = \underline{0.915 \text{ m}}$$

Continuity

$$u_1 d_1 = u_2 d_2$$

$$u_2 = u_1 \frac{d_1}{d_2} = 5 \times \frac{0.2}{0.915}$$

$$= \underline{1.09 \text{ m/s}}$$

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

Demonstration that $\mathcal{F}$ is positive for $d_2 > d_1$

Overall Energy Balance

$$\underbrace{\frac{g d_2}{2} - \frac{g d_1}{2}}_{\frac{\Delta \bar{p}}{\rho}} + \frac{u_2^2}{2} - \frac{u_1^2}{2} + \underbrace{\frac{g d_2}{2} - \frac{g d_1}{2}}_{g \Delta \bar{z}} + \mathcal{F} = 0$$

Hence $$\mathcal{F} = g(d_1 - d_2) + \frac{1}{2}(u_1^2 - u_2^2)$$

$$= g(d_1 - d_2) + \frac{u_1^2}{2}\left(1 - \frac{d_1^2}{d_2^2}\right)$$

But from equation (3),

$$\frac{u_1^2}{2} = \frac{g}{4} \frac{d_2}{d_1}(d_2 + d_1)$$

Eliminating u_1^2 and dividing by g,

$$\frac{\mathcal{F}}{g} = (d_1 - d_2) + \frac{d_2}{4 d_1}(d_2 + d_1)\frac{(d_2^2 - d_1^2)}{d_2^2}$$

$$= (d_1 - d_2) + \frac{1}{4 d_1 d_2}(d_1 + d_2)^2 (d_2 - d_1)$$

$$= (d_2 - d_1)\left[\frac{(d_1 + d_2)^2}{4 d_1 d_2} - 1\right]$$


$$= \frac{(d_2 - d_1)}{4 d_1 d_2}\left(d_1^2 + 2 d_1 d_2 + d_2^2 - 4 d_1 d_2\right) = \frac{(d_2 - d_1)^3}{4 d_1 d_2}$$

Thus, $\mathcal{F}/g$ is always positive provided that d_2 is greater than d_1 (and <u>not</u> vice versa)

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual

2.25

90° Reducing Elbow

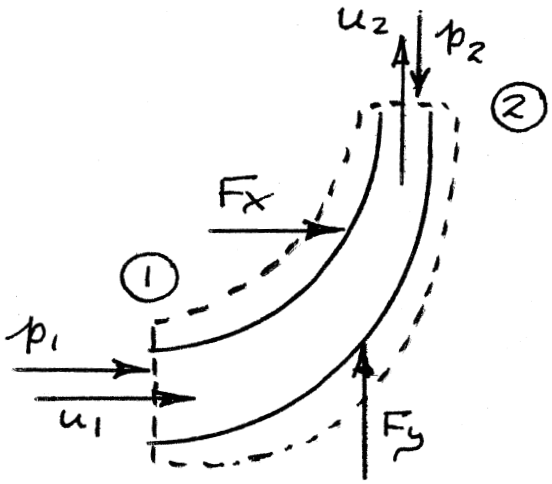

Continuity (ρ constant)

$$A_1 u_1 = A_2 u_2 \qquad (1)$$

Energy (Bernoulli)

$$\frac{u_1^2}{2} + \frac{p_1}{\rho} = \frac{u_2^2}{2} + \frac{p_2}{\rho} \qquad (2)$$

x – Momentum

$$\rho A_1 u_1^2 + p_1 A_1 + F_x = 0 \qquad (3)$$

y – Momentum

$$-\rho A_2 u_2^2 - p_2 A_2 + F_y = 0 \qquad (4)$$

Hence

$$F_x = -(\rho u_1^2 + p_1) A_1$$

$$F_y = (\rho u_2^2 + p_2) A_2 = \left(\rho u_1^2 \frac{A_1^2}{A_2^2} + p_2\right) A_2$$

But $$p_2 = p_1 + \frac{\rho u_1^2}{2}\left(1 - \frac{A_1^2}{A_2^2}\right)$$

so $$F_y = A_2\left[p_1 + \frac{\rho u_1^2}{2}\left(1 + \frac{A_1^2}{A_2^2}\right)\right]$$

Numerically, with $p_1 = 1.5 \times 10^5$ N/m², $u_1 = 5.0$ m/s

$$A_1 = \frac{\pi}{4}(0.20)^2 = 0.03142 \text{ m}^2$$

$$A_2 = \frac{\pi}{4}(0.15)^2 = 0.01767 \text{ m}^2$$

$$\frac{A_1^2}{A_2^2} = 3.160 \qquad \rho = 1{,}000 \frac{\text{kg}}{\text{m}^3}$$

$$F_x = -5{,}498 \text{ N}$$

$$F_y = 3{,}569 \text{ N}$$

page 73

Fluid Mechanics for Chemical Engineers 8th edition Wilkes Solutions Manual