Applied Fluid Mechanics 8th edition Untener Solutions Manual

SKU: 9780135577158-SOLUTIONS

Online Instructor's Manual

to accompany

Applied Fluid Mechanics

Eighth Edition

Robert L. Mott


University of Dayton

Joseph A. Untener

University of Dayton



Applied Fluid Mechanics 8th edition Untener Solutions Manual

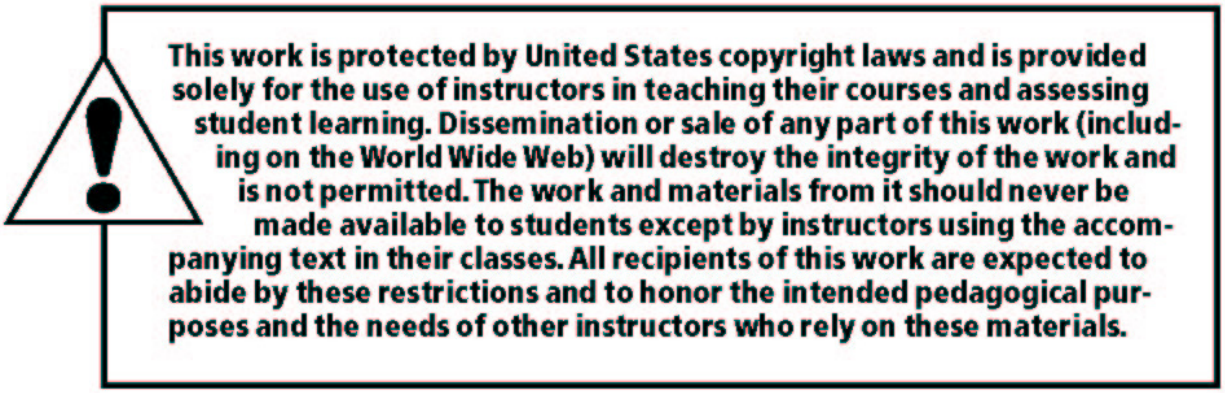

Copyright © 2022, 2015, 2006 by Pearson Education, Inc. or its affiliates, 221 River Street, Hoboken, NJ 07030. All Rights Reserved. Manufactured in the United States of America. This publication is protected by copyright, and permission should be obtained from the publisher prior to any prohibited reproduction, storage in a retrieval system, or transmission in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise. For information regarding permissions, request forms, and the appropriate contacts within the Pearson Education Global Rights and Permissions department, please visit www.pearsoned.com/permissions/.

Acknowledgments of third-party content appear on the appropriate page within the text

PEARSON, ALWAYS LEARNING, and REVEL are exclusive trademarks owned by Pearson Education, Inc. or its affiliates in the U.S. and/or other countries.

Unless otherwise indicated herein, any third-party trademarks, logos, or icons that may appear in this work are the property of their respective owners, and any references to third-party trademarks, logos, icons, or other trade dress are for demonstrative or descriptive purposes only. Such references are not intended to imply any sponsorship, endorsement, authorization, or promotion of Pearson's products by the owners of such marks, or any relationship between the owner and Pearson Education, Inc., or its affiliates, authors, licensees, or distributors.



ISBN-13: 978-0-13-557725-7
ISBN-10: 0-13-557725-X

Applied Fluid Mechanics 8th edition Untener Solutions Manual

Table of Contents

1. The Nature of Fluids and the Study of Fluid Mechanics	1
2. Viscosity of Fluids	14
3. Pressure Measurement	20
4. Forces Due to Static Fluids	28
5. Buoyancy and Stability	49
6. Flow of Fluids and Bernoulli's Equation	68
7. General Energy Equation	91
8. Reynolds Number, Laminar Flow, Turbulent Flow, and Energy Losses Due to Friction	107
9. Velocity Profiles for Circular Sections and Flow in Noncircular Sections	129
10. Minor Losses	145
11. Series Pipe Line Systems	160
12. Parallel and Branching Pipeline Systems	212
13. Pump Selection and Application	239
14. Open-Channel Flow	245
15. Flow Measurement	262
16. Forces due to Fluid in Motion	267
17. Drag & Lift	278
18. Fans, Blowers, Compressors, & the Flow of Gases	287
19. Flow of Air in Ducts	296

Applied Fluid Mechanics 8th edition Untener Solutions Manual

CHAPTER ONE

THE NATURE OF FLUIDS AND THE STUDY OF FLUID MECHANICS

Conversion factors

1.1 $1750\ \text{mm}(1\text{m}/10^3\text{mm}) = \mathbf{1.75\ m}$

1.2 $1800\ \text{mm}^2[1\text{m}^2/(10^3\ \text{mm})^2] = \mathbf{1.8\times10^{-3}\ m^2}$

1.3 $3.65\times10^3\ \text{mm}^3[1\text{m}^3/(10^3\ \text{mm})^3] = \mathbf{3.65\times10^{-6}\ m^3}$

1.4 $2.05\ \text{m}^2[(10^3\ \text{mm})^2/\text{m}^2] = \mathbf{2.05\times10^6\ mm^2}$

1.5 $0.391\ \text{m}^3[(10^3\ \text{mm})^3/\text{m}^3] = \mathbf{391\times10^6\ mm^3}$

1.6 $55.0\ \text{gal}(0.00379\ \text{m}^3/\text{gal}) = \mathbf{0.208\ m^3}$

1.7 $$\frac{80\text{km}}{\text{h}}\times\frac{10^3\ \text{m}}{\text{km}}\times\frac{1\text{h}}{3600\text{s}} = \mathbf{22.2\ m/s}$$

1.8 $25.3\ \text{ft}(0.3048\ \text{m/ft}) = \mathbf{7.71\ m}$

1.9 $1.86\ \text{mi}(1.609\ \text{km/mi})(10^3\ \text{m/km}) = \mathbf{2993\ m}$

1.10 $8.65\ \text{in}(25.4\ \text{mm/in}) = \mathbf{220\ mm}$

1.11 $3570\ \text{ft}(0.3048\ \text{m/ft}) = \mathbf{1088\ m}$

1.12 $560\ \text{ft}^3(0.0283\ \text{m}^3/\text{ft}^3) = \mathbf{15.85\ m^3}$

1.13 $6250\ \text{cm}^3[1\text{m}^3/(100\ \text{cm})^3] = \mathbf{6.25\times10^{-3}\ m^3}$

1.14 $8.45\ \text{L}(1\ \text{m}^3/1000\ \text{L}) = \mathbf{8.45\times10^{-3}\ m^3}$

1.15 $6.0\ \text{ft/s}(0.3048\ \text{m/ft}) = \mathbf{1.83\ m/s}$

1.16 $$\frac{2500\ \text{ft}^3}{\text{min}}\times\frac{0.0283\ \text{m}^3}{\text{ft}^3}\times\frac{1\text{min}}{60\ \text{s}} = \mathbf{1.18\ m^3/s}$$

Consistent units in an equation

1.17 $$v = \frac{s}{t} = \frac{0.60\ \text{km}}{10.6\ \text{s}}\times\frac{10^3\ \text{m}}{\text{km}} = \mathbf{56.6\ m/s}$$

Applied Fluid Mechanics 8th edition Untener Solutions Manual

1.18 $$v = \frac{s}{t} = \frac{1.50\ \text{km}}{6.2\ \text{s}} \times \frac{3600\ \text{s}}{\text{h}} = \mathbf{871\ km/h}$$

1.19 $$v = \frac{s}{t} = \frac{1000\ \text{ft}}{15\ \text{s}} \times \frac{1\ \text{mi}}{5280\ \text{ft}} \times \frac{3600\ \text{s}}{\text{h}} = \mathbf{45.5\ mi/h}$$

1.20 $$v = \frac{s}{t} = \frac{1.0\ \text{mi}}{5.7\ \text{s}} \times \frac{3600\ \text{s}}{\text{h}} = \mathbf{632\ mi/h}$$

1.21 $$a = \frac{2s}{t^2} = \frac{(2)(3.2\,\text{km})}{(4.7\,\text{min})^2} \times \frac{10^3\ \text{m}}{\text{km}} \times \frac{1\,\text{min}^2}{(60\,\text{s})^2} = \mathbf{8.05 \times 10^{-2}\ m/s^2}$$

1.22 $$t = \sqrt{\frac{2s}{a}} = \sqrt{\frac{(2)(13\,\text{m})}{9.18\ \text{m/s}^2}} = \mathbf{1.63\ s}$$

1.23 $$a = \frac{2s}{t^2} = \frac{(2)(3.2\,\text{km})}{(4.7\,\text{min})^2} \times \frac{10^3\ \text{m}}{\text{km}} \times \frac{1\ \text{ft}}{0.3048\ \text{m}} \times \frac{1\,\text{min}^2}{(60\,\text{s})^2} = \mathbf{0.264\ \frac{ft}{s^2}}$$

1.24 $$t = \sqrt{\frac{2s}{a}} = \sqrt{\frac{(2)(53\,\text{in})}{32.2\ \text{ft/s}^2} \times \frac{1\ \text{ft}}{12\ \text{in}}} = \mathbf{0.524\ s}$$

1.25 $$KE = \frac{mv^2}{2} = \frac{(15\,\text{kg})(1.2\ \text{m/s})^2}{2} = 10.8\,\frac{\text{kg}\,.\,\text{m}^2}{\text{s}^2} = \mathbf{10.8\,N \cdot m}$$

1.26 $$KE = \frac{mv^2}{2} = \frac{(3600\ \text{kg})}{2} \times \left(\frac{16\ \text{km}}{\text{h}}\right)^2 \times \frac{(10^3\ \text{m})^2}{\text{km}^2} \times \frac{1\,\text{h}^2}{(3600\ \text{s})^2} = \mathbf{35.6 \times 10^3\ \frac{kg \cdot m^2}{s^2}}$$

$$\boldsymbol{KE = 35.6\ kN \cdot m}$$

1.27 $$KE = \frac{mv^2}{2} = \frac{75\ \text{kg}}{2} \times \left(\frac{6.85\ \text{m}}{\text{s}}\right)^2 = 1.76 \times 10^3\ \frac{\text{kg} \cdot \text{m}}{\text{s}^2} = \mathbf{1.76\ kN \cdot m}$$

1.28 $$m = \frac{2(KE)}{v^2} = \frac{(2)(38.6\ \text{N} \cdot \text{m})}{1} \times \left(\frac{\text{h}}{31.5\ \text{km}}\right)^2 \times \frac{1\ \text{kg} \cdot \text{m}}{\text{s}^2 \cdot \text{N}} \times \frac{(3600\,\text{s})^2}{\text{h}^2} \times \frac{1\ \text{km}^2}{(10^3\ \text{m})^2}$$

$$m = \frac{(2)(38.6)(3600)^2}{(31.5)^2(10^3)^2}\ \mathbf{kg} = \mathbf{1.008\ kg}$$

1.29 $$m = \frac{2(KE)}{v^2} = \frac{(2)(94.6\,\text{m N} \cdot \text{m})}{(2.25\ \text{m/s})^2} \times \frac{10^{-3}\,\text{N}}{\text{mN}} \times \frac{1\ \text{kg} \cdot \text{m}}{\text{s}^2 \cdot \text{N}} \times \frac{10^3\ \text{g}}{\text{kg}} = \mathbf{37.4\ g}$$

1.30 $$v = \sqrt{\frac{2(KE)}{m}} = \sqrt{\frac{2(15\ \text{N} \cdot \text{m})}{12\ \text{kg}} \times \frac{1\ \text{kg} \cdot \text{m/s}^2}{\text{N}}} = \mathbf{1.58\ m\,/\,s}$$

Applied Fluid Mechanics 8th edition Untener Solutions Manual

1.31 $$v=\sqrt{\frac{2(KE)}{m}}=\sqrt{\frac{2(212\,\text{m N}\cdot\text{m})}{175\,\text{g}}\times\frac{10^{-3}\,\text{N}}{\text{mN}}\times\frac{10^{3}\,\text{g}}{\text{kg}}\times\frac{1\,\text{kg}\cdot\text{m}}{\text{s}^2\cdot\text{N}}}$$ **= 1.56 m/s**

1.32 $$KE=\frac{mv^2}{2}=\frac{(1\,\text{slug})(4\,\text{ft/s})^2}{2}\times\frac{1\,\text{lb}\cdot\text{s}^2/\text{ft}}{\text{slug}}$$ **= 8.00 lb · ft**

1.33 $$KE=\frac{mv^2}{2}=\frac{wv^2}{2g}=\frac{(8000\,\text{lb})(10\,\text{mi})^2}{(2)(32.2\,\text{ft/s}^2)(\text{h})^2}\times\frac{1\,\text{h}^2}{(3600\,\text{s})^2}\times\frac{(5280\,\text{ft})^2}{\text{mi}^2}$$

$$KE=\frac{(8000)(10)^2(5280)^2}{(2)(32.2)(3600)^2}\,\text{lb}\cdot\text{ft}$$ **= 26700 lb · ft**

1.34 $$KE=\frac{mv^2}{2}=\frac{wv^2}{2g}=\frac{(150\,\text{lb})(20\,\text{ft/s})^2}{(2)(32.2\,\text{ft/s}^2)}$$ **= 932 lb · ft**

1.35 $$m=\frac{2(KE)}{v^2}=\frac{2(15\,\text{lb}\cdot\text{ft})}{(2.2\,\text{ft/s}^2)^2}=6.20\,\frac{\text{lb}\cdot\text{s}^2}{\text{ft}}$$ **= 6.20 slugs**

1.36 $$w=\frac{2g(KE)}{v^2}=\frac{2(32.2\,\text{ft})(38.6\,\text{lb}\cdot\text{ft})(\text{h}^2)}{\text{s}^2(19.5\,\text{mi})^2}\times\frac{1\,\text{mi}^2}{(5280\,\text{ft})^2}\times\frac{(3600\,\text{s})^2}{\text{h}^2}$$

$$w=\frac{(2)(32.2)(38.6)(3600)^2}{(19.5)^2(5280)^2}\,\text{lb}$$ **= 3.04 lb**

1.37 $$v=\sqrt{\frac{2g(KE)}{w}}=\sqrt{\frac{2(32.2\,\text{ft/s}^2)(10\,\text{lb}\cdot\text{ft})}{30\,\text{lb}}}$$ **= 4.63 ft/s**

1.38 $$v=\sqrt{\frac{2g(KE)}{w}}=\sqrt{\frac{2(32.2\,\text{ft/s}^2)(30\,\text{oz}\cdot\text{in})}{6.0\,\text{oz}}\times\frac{1\,\text{ft}}{12\,\text{in}}}$$ **= 5.18 ft/s**

1.39 $$\text{ERA}=\frac{39\,\text{runs}}{141\,\text{innings}}\times\frac{9\,\text{innings}}{\text{game}}$$ **= 2.49 runs/game**

1.40 $$\frac{3.12\,\text{runs}}{\text{game}}\times\frac{1\,\text{game}}{9\,\text{innings}}\times 150\,\text{innings}$$ **= 52 runs**

1.41 $$40\,\text{runs}\times\frac{1\,\text{game}}{2.79\,\text{runs}}\times\frac{9\,\text{innings}}{\text{game}}$$ **= 129 innings**

1.42 $$\text{ERA}=\frac{49\,\text{runs}}{123\,\text{innings}}\times\frac{9\,\text{innings}}{\text{game}}$$ **= 3.59 runs/game**

Applied Fluid Mechanics 8th edition Untener Solutions Manual

The definition of pressure

1.43 $p = F/A = 2500\ \text{lb}/[\pi(2.00\ \text{in})^2/4] = \mathbf{796\ lb/in^2 = 796\ psi}$

1.44 $p = F/A = 6500\ \text{lb}/[\pi(1.50\,\text{in})^2/4] = \mathbf{3678\ psi}$

1.45 $$p = \frac{F}{A} = \frac{14.0\ \text{kN}}{\pi(75\,\text{mm})^2/4} \times \frac{10^3\,\text{N}}{\text{kN}} \times \frac{(10^3\ \text{mm})^2}{\text{m}^2} = 3.17 \times 10^6\ \frac{\text{N}}{\text{m}^2} = \mathbf{3.17\ MPa}$$

1.46 $$p = \frac{F}{A} = \frac{38.8 \times 10^3\ \text{N}}{\pi(50.0\ \text{mm})^2/4} \times \frac{(10^3\ \text{mm})^2}{\text{m}^2} = 19.8 \times 10^6\ \frac{\text{N}}{\text{m}^2} = \mathbf{19.8\ MPa}$$

1.47 $$p = \frac{F}{A} = \frac{6000\ \text{lb}}{\pi(8.0\,\text{in})^2/4} = \mathbf{119\ psi}$$

1.48 $$p = \frac{F}{A} = \frac{1800\ \text{lb}}{\pi(2.50\ \text{in})^2/4} = \mathbf{3667\ psi}$$

1.49 $$F = pA = \frac{20.5 \times 10^6\,\text{N}}{\text{m}^2} \times \frac{\pi(50\,\text{mm})^2}{4} \times \frac{1\ \text{m}^2}{(10^3\ \text{mm})^2} = \mathbf{40.25\ kN}$$

1.50 $$F = pA = (6000\,\text{lb/in}^2)\left(\pi[2.00\ \text{in}]^2/4\right) = \mathbf{18850\ lb}$$

1.51 $$p = \frac{F}{A} = \frac{F}{\pi D^2/4} = \frac{4F}{\pi D^2}\text{: Then } D = \sqrt{\frac{4F}{\pi p}}$$


$$D = \sqrt{\frac{4(20000\ \text{lb})}{\pi(5000\ \text{lb/in}^2)}} = \mathbf{2.26\ in}$$

1.52 $$D = \sqrt{\frac{4F}{\pi p}} = \sqrt{\frac{4(30 \times 10^3\ \text{N})}{\pi(15.0 \times 10^6\ \text{N/m}^2)}} = 50.5 \times 10^{-3}\,\text{m} = \mathbf{50.5\ mm}$$

Applied Fluid Mechanics 8th edition Untener Solutions Manual


1.53 $$F = pA = \frac{p[\pi D^2]}{4} = \frac{500\ \text{lb}(\pi)(D\ \text{in})^2}{\text{in}^2\ 4} = \mathbf{392.7\ D^2\ lb}$$

D(in)	D^2(in^2)	F(lb)
1.00	1.00	393
2.00	4.00	1571
3.00	9.00	3534
4.00	16.00	6283
5.00	25.00	9817
6.00	36.00	14137
7.00	49.00	19242
8.00	64.00	25133

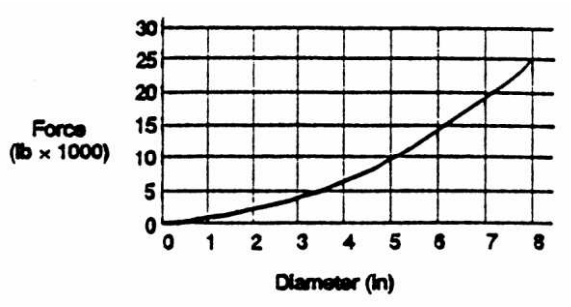

1.54 $$p = \frac{F}{A} = \frac{F}{\pi D^2/4} = \frac{4F}{\pi D^2} = \frac{4(5000\ \text{lb})}{\pi(D\ \text{in})^2} = \frac{6366}{D^2}\ \text{psi}$$

D(in)	D^2(in^2)	p(psi)
1.00	1.00	6366
2.00	4.00	1592
3.00	9.00	707
4.00	16.00	398
5.00	25.00	255
6.00	36.00	177
7.00	49.00	130
8.00	64.00	99

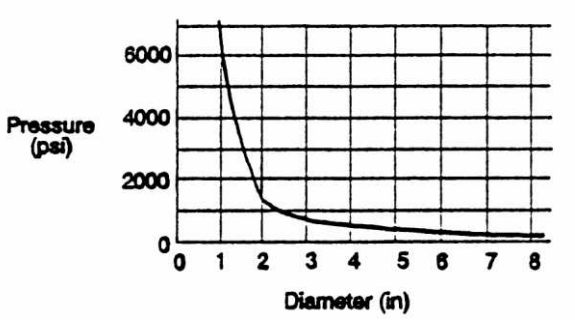

1.55 (Variable Answers) Example: w = 160 lb (4.448 N/lb) = **712 N**

$$p = \frac{F}{A} = \frac{712\ \text{N}}{\pi(20\ \text{mm})^2/4} \times \frac{(10^3\ \text{mm})^2}{\text{m}^2} = 2.77 \times 10^6\ \text{Pa} = \mathbf{2.27\ MPa}$$

$p = 2.27 \times 10^6$ Pa (1 psi/6895 Pa) = **329 psi**

1.56 (Variable Answers) using p = 2.27 MPa

$F = pA = (2.27 \times 10^6\ \text{N/m}^2)(\pi(0.250\ \text{m})^2/4) = 111 \times 10^3\ \text{N} = \mathbf{111\ kN}$

F = 111 kN (1 lb/4.448 N) = **25050 lb**

Applied Fluid Mechanics 8th edition Untener Solutions Manual

Bulk modulus

1.57 $\Delta p = -E(\Delta V / V) = -130000 \text{ psi}(-0.01) = \mathbf{1300 \text{ psi}}$

$\Delta p = -896 \text{ MPa}(-0.01) = \mathbf{8.96 \text{ MPa}}$

1.58 $\Delta p = -E(\Delta V / V) = -3.59 \times 10^6 \text{ psi}(-0.01) = \mathbf{35900 \text{ psi}}$

$\Delta p = -24750 \text{ MPa}(-0.01) = \mathbf{247.5 \text{ MPa}}$

1.59 $\Delta p = -E(\Delta V / V) = -189000 \text{ psi}(-0.01) = \mathbf{1890 \text{ psi}}$

$\Delta p = -1303 \text{ MPa}(-0.01) = \mathbf{13.03 \text{ MPa}}$

1.60 $\Delta V / V = -0.01; \Delta V = 0.01 V = 0.01 \text{ AL}$

Assume area of cylinder does not change.

$\Delta V = A(\Delta L) = 0.01 \text{AL}$

Then $\Delta L = 0.01 \text{ L} = 0.01(12.00 \text{ in}) = \mathbf{0.120 \text{ in}}$

1.61 $$\frac{\Delta V}{V} = \frac{-p}{E} = \frac{-3000 \text{ psi}}{189000 \text{ psi}} = -0.0159 = \mathbf{-1.59\%}$$

1.62 $$\frac{\Delta V}{V} = \frac{-20.0 \text{ MPa}}{1303 \text{ MPa}} = -0.0153 = \mathbf{-1.53\%}$$

1.63 Stiffness = Force/Change in Length = F/ΔL

Bulk Modulus = $E = \dfrac{-P}{\Delta V / V} = \dfrac{-pV}{\Delta V}$

But $p = F/A; V = AL; \Delta V = -A(\Delta L)$

$$E = \frac{-F}{A} \times \frac{AL}{-A(\Delta L)} = \frac{FL}{A(\Delta L)}$$

$$\frac{F}{(\Delta L)} = \frac{EA}{L} = \frac{189000 \text{ lb } \pi(0.5 \text{ in})^2}{\text{in}^2(42 \text{ in})4} = \mathbf{884 \text{ lb/in}}$$

1.64 $$\frac{F}{(\Delta L)} = \frac{EA}{L} = \frac{189000 \text{ lb } \pi(0.5\text{in})^2}{\text{in}^2(10.0 \text{ in})(4)} = \mathbf{3711 \text{ lb/in}}$$ **4.2 times higher**

1.65 $$\frac{F}{(\Delta L)} = \frac{EA}{L} = \frac{189000 \text{ lb } \pi(2.00 \text{ in})^2}{\text{in}^2(42.0 \text{ in})(4)} = \mathbf{14137 \text{ lb/in}}$$ **16 times higher**

1.66 Use large diameter cylinder and short storkes.

Force and mass

1.67 $$m = \frac{w}{g} = \frac{810 \text{ N}}{9.18 \text{ m/ s}^2} \times \frac{1 \text{ kg} \cdot \text{m/s}^2}{\text{N}} = \mathbf{82.6 \text{ kg}}$$

Applied Fluid Mechanics 8th edition Untener Solutions Manual

1.68 $$m = \frac{w}{g} = \frac{1.85 \times 10^3 \text{ N}}{9.18 \text{ m/s}^2} \times \frac{1 \text{ kg} \cdot \text{m/s}^2}{\text{N}} = \mathbf{189 \text{ kg}}$$

1.69 $$w = mg = 825 \text{ kg} \times 9.81 \text{ m/s}^2 = 8093 \text{ kg} \cdot \text{m/s}^2 = \mathbf{8093 \text{ N}}$$

1.70 $$w = mg = 450 \text{ g} \times \frac{1 \text{ kg}}{10^3 \text{ g}} \times 9.81 \text{ m/s}^2 = 4.41 \text{ kg} \cdot \text{m/s}^2 = \mathbf{4.41 \text{ N}}$$

1.71 $$m = \frac{w}{g} = \frac{7.8 \text{ lb}}{32.2 \text{ ft/s}^2} = 0.242 \frac{\text{lb} \cdot \text{s}^2}{\text{ft}} = \mathbf{0.242 \text{ slugs}}$$

1.72 $$m = \frac{w}{g} = \frac{42.0 \text{ lb}}{32.2 \text{ ft/s}^2} = \mathbf{1.304 \text{ slugs}}$$

1.73 $$w = mg = 1.58 \text{ slugs} \times 32.2 \text{ ft/s}^2 \times \frac{1 \text{ lb} \cdot \text{s}^2/\text{ft}}{\text{slug}} = \mathbf{50.9 \text{ lb}}$$

1.74 $$w = mg = 0.258 \text{ slugs} \times 32.2 \text{ ft/s}^2 \times \frac{1 \text{ lb} \cdot \text{s}^2/\text{ft}}{\text{slug}} = \mathbf{8.31 \text{ lb}}$$

1.75 $$m = \frac{w}{g} = \frac{160 \text{ lb}}{32.2 \text{ ft/s}^2} = \mathbf{4.97 \text{ slugs}}$$

$w = 160 \text{ lb} \times 4.448 \text{ N/lb} = \mathbf{712 \text{ N}}$

$m = 4.97 \text{ slugs} \times 14.59 \text{ kg/slug} = \mathbf{72.5 \text{ kg}}$

1.76 $$m = \frac{w}{g} = \frac{1.00 \text{ lb}}{32.2 \text{ ft/s}^2} = \mathbf{0.0311 \text{ slugs}}$$

$w = 0.0311 \text{ slugs} \times 14.59 \text{ kg/slug} = \mathbf{0.453 \text{ Kg}}$

$m = 1.00 \text{ lb} \times 4.448 \text{ N/lb} = \mathbf{4.448 \text{ N}}$

1.77 $$F = w = mg = 1000 \text{ kg} \times 9.81 \text{ m/s}^2 = 9810 \text{ kg} \cdot \text{m/s}^2 = \mathbf{9810 \text{ N}}$$

1.78 $$F = 9810 \text{ N} \times 1.0 \text{ lb}/4.448 \text{ N} = \mathbf{2205 \text{ lb}}$$

1.79 (Variable Answer) See problem 1.75 for method.

Density, specific weight, and specific gravity

1.80 $$\gamma_B = (sg)_B \gamma_w = (0.876)(9.81 \text{ kN/m}^3) = \mathbf{8.59 \text{ kN/m}^3}$$

$$\rho_B = (sg)_B \rho_w = (0.876)(1000 \text{ kg/m}^3) = \mathbf{876 \text{ kg/m}^3}$$

1.81 $$\rho = \frac{\gamma}{g} = \frac{12.02 \text{ N}}{\text{m}^3} \times \frac{\text{s}^2}{9.81 \text{ m}} \times \frac{1 \text{ kg} \cdot \text{m/s}^2}{\text{N}} = \mathbf{1.225 \text{ kg/m}^3}$$

Applied Fluid Mechanics 8th edition Untener Solutions Manual

1.82 $$\gamma = \rho g = 1.964\ \text{kg/m}^3 \times 9.81\ \text{m/s}^2 \times \frac{1\ \text{N}}{1\ \text{kg}\cdot\text{m/s}^2} = \mathbf{19.27\ N/m^3}$$

1.83 $$\text{sg} = \frac{\gamma_o}{\gamma_w @ 4^\circ\text{C}} = \frac{8.860\ \text{kN/m}^3}{9.81\ \text{kN/m}^3} = \mathbf{0.903\ at\ 5^\circ C}$$

$$\text{sg} = \frac{\gamma_o}{\gamma_w @ 4^\circ\text{C}} = \frac{8.483\ \text{kN/m}^3}{9.81\ \text{kN/m}^3} = \mathbf{0.865\ at\ 50^\circ C}$$

1.84 $$\gamma = \frac{w}{V}; V = \frac{w}{\gamma} = \frac{3.50\ \text{kN}}{130.4\ \text{kN/m}^3} = \mathbf{0.0268\ m^3}$$

1.85 $$V = AL = \pi D^2 L/4 = \pi(0.150\ \text{m})^2(0.100\ \text{m})/4 = 1.767\times10^{-3}\ \text{m}^3$$

$$\rho_o = \frac{m}{V} = \frac{1.56\ \text{kg}}{1.767\times10^{-3}\ \text{m}^3} = \mathbf{883\ kg/m^3}$$

$$\gamma_o = \rho_o g = 883\ \text{kg/m}^3 \times 9.81\ \text{m/s}^2 \times \frac{1\ \text{N}}{1\ \text{kg}\cdot\text{m/s}^2} = 8.66 \times \frac{10^3\ \text{N}}{\text{m}^3} = \mathbf{8.66\ \frac{kg}{m^3}}$$

$$\text{sg} = \rho_o / \rho_w @ 4^\circ\text{C} = 883\ \text{kg/m}^3 / 1000\ \text{kg/m}^3 = \mathbf{0.883}$$

1.86 $$\gamma = (\text{sg})(\gamma_w @ 4^\circ\text{C}) = 1.258(9.81\ \text{kN/m}^3) = 12.34\ \text{kN/m}^3 = w/V$$

$$w = \gamma V = (12.34\ \text{kN/ m}^3)(0.50\ \text{m}^3) = \mathbf{6.17\ kN}$$

$$m = \frac{w}{g} = \frac{6.17\ \text{kN}}{9.18\ \text{m/s}^2} \times \frac{10^3\ \text{N}}{\text{kN}} \times \frac{1\ \text{kg}\cdot\text{m/s}^2}{\text{N}} = \mathbf{629\ kg}$$

1.87 $$w = \gamma V = (\text{sg})(\gamma_w)(V) = (0.68)(9.81\ \text{kN/ m}^3)(0.095\ \text{m}^3) = 0.634\ \text{kN} = \mathbf{634\ N}$$

1.88 $$\gamma = \rho g = (1200\ \text{kg/m}^3)(9.81\text{m/s}^2)\left(\frac{1\text{N}}{\text{kg}\cdot\text{m/s}^2}\right) = \mathbf{11.77\ kN/m^3}$$

$$\text{sg} = \frac{\rho}{\rho_w @ 4^\circ\text{C}} = \frac{1200\ \text{kg/m}^3}{1000\ \text{kg/m}^3} = \mathbf{1.20}$$

1.89 $$V = \frac{w}{\gamma} = \frac{32.0\ \text{N}}{(0.826)(9.81\ \text{kN/m}^3)} \times \frac{1\ \text{kN}}{10^3\ \text{N}} = \mathbf{3.95\times10^{-3}\ m^3}$$

1.90 $$\gamma = \rho g = \frac{1080\ \text{kg}}{\text{m}^3} \times \frac{9.81\ \text{m}}{\text{s}^2} \times \frac{1\text{N}}{1\text{kg}\cdot\text{m/s}^2} \times \frac{1\ \text{kN}}{10^3\ \text{N}} = \mathbf{10.59\ kN/m^3}$$

$$\text{sg} = \rho/\rho_w = \frac{1080\ \text{kg/m}^3}{1000\ \text{kg/m}^3} = \mathbf{1.08}$$

1.91 $$\rho = (\text{sg})(\rho_w) = (0.789)(1000\ \text{kg/m}^3) = \mathbf{789\ kg/m^3}$$

$$\gamma = (\text{sg})(\gamma_w) = (0.789)(9.81\ \text{kN/m}^3) = \mathbf{7.74\ kN/m^3}$$

Applied Fluid Mechanics 8th edition Untener Solutions Manual

1.92 $w_o = 35.4\text{ N} - 2.25\text{ N} = 33.15\text{ N}$

$V_o = Ad = (\pi D^2/4)(d) = \pi(.150\text{m})^2(.20\text{ m})/4 = 3.53\times10^{-3}\text{ m}^3$

$$\gamma_o = \frac{w}{V} = \frac{33.15\text{ N}}{3.53\times10^{-3}\text{ m}^3} = 9.38\times10^3\text{ N/m}^3 = \mathbf{9.38\text{ kN/m}^3}$$

$$\text{sg} = \frac{\gamma_o}{\gamma_w} = \frac{9.38\text{ kN/m}^3}{9.81\text{ kN/m}^3} = \mathbf{0.956}$$

1.93 $V = Ad = (\pi D^2/4)(d) = \pi(10\text{ m})^2(6.75\text{ m})/4 = 530.1\text{ m}^3$

$w = \gamma V = (0.68)(9.81\text{ kN/m}^3)(530.1\text{ m}^3) = 3.536\times10^3\text{kN} = \mathbf{3.536\text{ MN}}$

$m = \rho V = (0.68)(1000\text{ kg/m}^3)(530.1\text{ m}^3) = 360.5\times10^3\text{ kg} = \mathbf{360.5\text{ Mg}}$

1.94 $w_{castor\ oil} = \gamma_{co}\cdot V_{co} = (9.42\text{ kN/m}^3)(0.03\text{ m}^3) = 0.283\text{ kN}$

$$V_m = \frac{w}{\gamma_m} = \frac{0.283\text{ kN}}{(13.54)(9.81\text{ kN/m}^3)} = \mathbf{2.13\times10^{-3}\text{ m}^3}$$

1.95 $w = \gamma V = (2.32)(9.81\text{ kN/m}^3)(1.42\times10^{-4}\text{ m}^3) = 3.23\times10^{-3}\text{ kN} = \mathbf{3.23\text{ N}}$

1.96 $\gamma = (\text{sg})(\gamma_w) = 0.876(62.4\text{ lb/ft}^3) = \mathbf{54.7\text{ lb/ft}^3}$

$\rho = (\text{sg})(\rho_w) = 0.876(1.94\text{ slugs/ft}^3) = \mathbf{1.70\text{ slugs/ft}^3}$

1.97 $$\rho = \frac{\gamma}{g} = \frac{0.0765\text{ lb/ft}^3}{32.2\text{ ft/s}^2}\times\frac{1\text{ slug}}{1\text{ lb}\cdot\text{s}^2/\text{ft}} = \mathbf{2.38\times10^{-3}\text{ slugs/ft}^3}$$

1.98 $$\gamma = \rho g = 0.00381\text{ slug/ft}^3(32.2\text{ ft/s}^2)\frac{1\text{ lb}\cdot\text{s}^2/\text{ft}}{\text{slug}} = \mathbf{0.1227\text{ lb/ft}^3}$$

1.99 $\text{sg} = \gamma_o/(\gamma_w@4^\circ\text{C}) = 56.4\text{ lb/ft}^3/62.4\text{ lb/ft}^3 = \mathbf{0.904\text{ at }40^\circ\text{F}}$

$\text{sg} = \gamma_o/(\gamma_w@4^\circ\text{C}) = 54.0\text{ lb/ft}^3/62.4\text{ lb/ft}^3 = \mathbf{0.865\text{ at }120^\circ\text{F}}$

1.100 $V = w/\gamma = 500\text{ lb}/834\text{ lb/ft}^3 = \mathbf{0.600\text{ ft}^3}$

1.101 $$\gamma = \frac{w}{V} = \frac{7.50\text{ lb}}{1\text{ gal}}\times\frac{7.48\text{ gal}}{\text{ft}^3} = \mathbf{56.1\text{ lb/ft}^3}$$

$$\rho = \frac{\gamma}{g} = \frac{56.1\text{ lb/ft}^3}{32.2\text{ ft/s}^2} = 1.74\frac{\text{lb}\cdot\text{s}^2}{\text{ft}^4} = \mathbf{1.74\ \ slugs/ft^3}$$

$$\text{sg} = \frac{\gamma_o}{\gamma_w@4^\circ\text{C}} = \frac{5.61\text{ lb/ft}^3}{62.4\text{ lb/ft}^3} = \mathbf{0.899}$$

1.102 $$w = \gamma V = (1.258)\frac{(62.4\text{ lb})}{\text{ft}^3}(50\text{ gal})\frac{(1\text{ ft}^3)}{7.84\text{ gal}} = \mathbf{525\text{ lb}}$$

1.103 $$w = \gamma V = \rho g V = \frac{1.32\text{ lb.s}^2}{\text{ft}^4}\times\frac{32.2\text{ ft}}{8^2}25.0\text{ gal}\times\frac{1\text{ft}^3}{7.84\text{ gal}} = \mathbf{142\text{ lb}}$$

Applied Fluid Mechanics 8th edition Untener Solutions Manual

1.104 $$\text{sg} = \frac{\rho}{\rho_w} = \frac{1.20\,\text{g}}{\text{cm}^3} \times \frac{\text{m}^3}{1000\,\text{kg}} \times \frac{1\,\text{kg}}{10^3\,\text{g}} \times \frac{(10^2\ \text{cm})^3}{\text{m}^3} = \mathbf{1.20}$$

$\rho = (\text{sg})(\rho_w) = 1.20(1.94\ \text{slugs/ft}^3) = \mathbf{2.33\ slugs/ft^3}$

$\gamma = (\text{sg})(\gamma_w) = (1.20)(62.4\ \text{lb/ft}^3) = \mathbf{74.9\ lb/ft^3}$

1.105 $$V = \frac{w}{\gamma} = \frac{5.0\,\text{lb}\ \text{ft}^3}{(0.826)62.4\,\text{lb}} \times \frac{0.0283\,\text{m}^3}{\text{ft}^3} \times \frac{(10^2\ \text{cm})^3}{\text{m}^3} = \mathbf{2745\ cm^3}$$

1.106 $\gamma = (\text{sg})(\gamma_w) = (1.08)(62.4\ \text{lb/ft}^3) = \mathbf{67.4\ lb/ft^3}$

1.107 $\rho = (0.79)(1.94\ \text{slugs/ft}^3) = \mathbf{1.53\ slugs/ft^3}$; $\boldsymbol{\rho = 0.79\ g/cm^3}$

1.108 $$\gamma_o = \frac{w}{V} = \frac{(7.95 - 0.50)\text{lb}}{\left(\pi(6.0\,\text{in})^2/4\right)(8.0\,\text{in})} \times \frac{1728\ \text{in}^3}{\text{ft}^3} = \mathbf{56.9\ lb/ft^3}$$

$\text{sg} = \gamma_o/\gamma_w = 56.9\ \text{lb/ft}^3/62.4\ \text{lb/ft}^3 = \mathbf{0.912}$

1.109 $$V = A \cdot d = \frac{\pi D^2}{4} \cdot d = \frac{\pi(30\,\text{ft})^2}{4} \times 22\,\text{ft} = 15550\ \text{ft}^3 \times 7.48\ \text{gal/ft}^3 = \mathbf{1.16 \times 10^5\ gal}$$

$w = \gamma V = (0.68)(62.4\ \text{lb/ft}^3)(15550\ \text{ft}^3) = \mathbf{6.60 \times 10^5\ lb}$

1.110 $w_{co} = \gamma_{co} V = (59.69\ \text{lb/ft}^3)(5\ \text{gal})(1\ \text{ft}^3/7.48\ \text{gal}) = \mathbf{39.90\ lb}$


$$V_m = \frac{w}{\gamma_m} = \frac{39.90\,\text{lb}\ \text{ft}^3}{13.54(62.4\,\text{lb})} \times \frac{7.48\,\text{gal}}{\text{ft}^3} = \mathbf{0.353\ gal}$$


1.111 $$w = \gamma V = (2.32)\frac{(62.4\,\text{lb})}{\text{ft}^3}(8.64\ \text{in}^3)\frac{(1\ \text{ft}^3)}{1728\ \text{in}^3} = \mathbf{0.724\ lb}$$

Applied Fluid Mechanics 8th edition Untener Solutions Manual

CURVE FIT FOR THE PROPERTIES OF WATER VS. TEMPERATURE
TABLE A.1

Temp.	Sp Wt	Density	Computed Sp Wt	% Diff	Computed Density	%Diff
0	9.81	1000	9.811	0.002	1000.2	0.020
5	9.81	1000	9.812	0.018	1000.2	0.017
10	9.81	1000	9.809	0.012	999.8	-0.015
15	9.81	1000	9.803	-0.017	999.2	-0.075
20	9.79	998	9.794	0.045	998.4	0.039
25	9.78	997	9.783	0.028	997.3	0.029
30	9.77	996	9.769	-0.015	996.0	-0.002
35	9.75	994	9.752	0.022	994.5	0.047
40	9.73	992	9.734	0.037	992.8	0.077
45	9.71	990	9.713	0.032	990.9	0.090
50	9.69	988	9.691	0.007	988.9	0.088
55	9.67	986	9.667	-0.035	986.7	0.072
60	9.65	984	9.641	-0.096	984.4	0.042
65	9.62	981	9.613	-0.070	982.0	0.103
70	9.59	978	9.584	-0.061	979.5	0.154
75	9.56	975	9.553	-0.069	976.9	0.195
80	9.53	971	9.521	-0.097	974.2	0.331
85	9.50	968	9.486	-0.144	971.5	0.357
90	9.47	965	9.450	-0.211	968.6	0.376
95	9.44	962	9.411	-0.302	965.7	0.388
100	9.40	958	9.371	-0.312	962.8	0.500

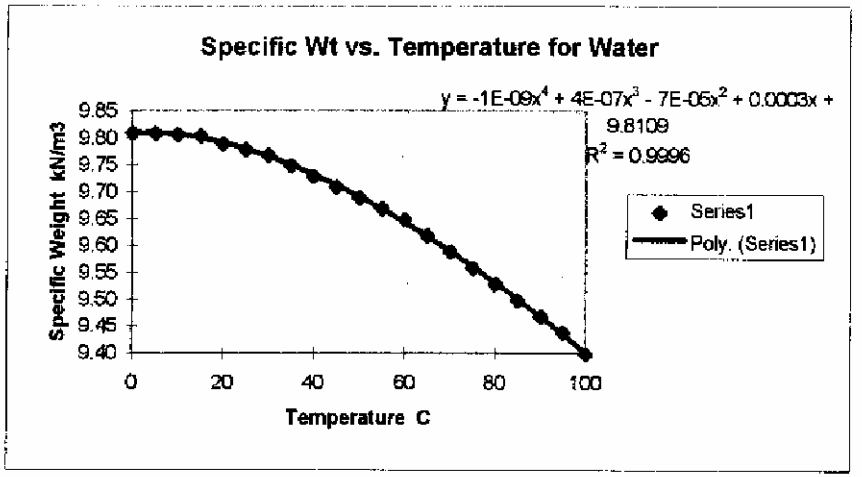

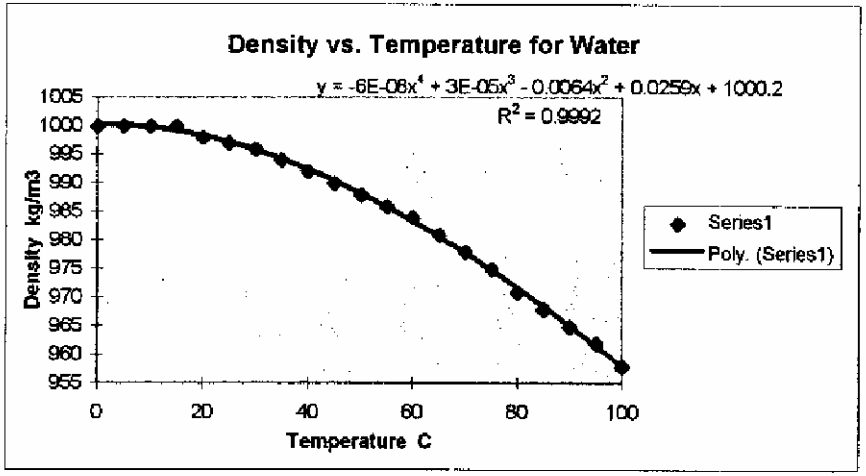

Computer Assignment 2: Sample Output - Equations for Specific Weight and Density versus Temperature are shown within the plots of the output.

Applied Fluid Mechanics 8th edition Untener Solutions Manual

1.112 $$\text{Tank Size} = 75\ \text{People} \times \frac{1.7\ \text{gal per person}}{1\ \text{day}} \times 3\ \text{days} \times \frac{1\ \text{ft}^3}{7.48\ \text{gal}} = \underline{51.1\ \text{ft}^3}$$

1.113 $$\text{Required Volume} = 85\ \text{Gallons} \times \frac{1\,\text{ft}^3}{7.48\,\text{gal}} \times \frac{12^3\ \text{in}^3}{1^3\ \text{ft}^3} = 19{,}636\,\text{in}^3$$

$$\text{Tank Volume} = 19{,}636\,\text{in}^3 = \frac{\pi \times (\text{D})^2 \times (\text{h})}{4} = \frac{\pi \times (38\,\text{in})^2 \times (\text{h})}{4}$$

$$\text{Required Height} = \frac{19{,}636\,\text{in}^3 \times 4}{\pi \times (38\,\text{in})^2} = \underline{17.3\,\text{in}}$$

1.114 $$\text{Flow Rate} = \frac{80\,\text{N}}{5\,\text{s}} \times \frac{60\,\text{s}}{1\,\text{min}} = 960\,\underline{\frac{\text{N}}{\text{min}}}$$

1.115 $$V_{\text{REQ.}} = 1.5\,\text{m} \times 2.5\,\text{m} \times 25\,\text{cm} \times \frac{1\,\text{m}}{100\,\text{cm}} = 0.938\,\text{m}^3$$

$$\text{Time Required} = \frac{1\,\text{min}}{60\,\text{L}} \times \frac{1\,\text{L}}{0.001\,\text{m}^3} \times 0.938\,\text{m}^3 = \underline{15.6\,\text{min}}$$

1.116 $$\text{Flow Rate} = \frac{\text{Volume}}{\text{Time}} = \frac{\left(\frac{\pi \times (24\,\text{in})^2}{4} \times 18\,\text{in} \times \frac{1.0\,\text{gal}}{231\,\text{in}^3}\right)}{\left(90\,\text{s} \times \frac{1\,\text{min}}{60\,\text{s}}\right)} = \underline{23.5\,\frac{\text{gal}}{\text{min}}}$$

1.117 $$\$17{,}000 = 7500\,\frac{\$}{\text{year}} \times \text{X years}$$

$$\text{X} = \frac{\$17{,}000}{7500\,\frac{\$}{\text{year}}} = \underline{2.27\ \text{years}}$$

1.118 $$\text{Annual Cost} = 2\,\text{HP} \times \frac{0.746\,\text{kW}}{1\,\text{HP}} \times 1\,\text{year} \times \frac{365\,\text{days}}{1\,\text{year}} \times \frac{24\,\text{hr}}{1\,\text{day}} \times \frac{\$0.10}{\text{kW} - \text{HR}} = \underline{\$1{,}307\,/\,\text{Year}}$$

1.119 $$\text{Displacement} = \frac{\pi \times 7.5\,\text{cm}^2 \times 10.0\,\text{cm}}{4} \times \frac{0.001\,\text{L}}{1\,\text{cm}^3} = \underline{0.442\,\text{L}}$$

Applied Fluid Mechanics 8th edition Untener Solutions Manual

1.120 $$\text{Flow Rate} = \frac{2.2\,\text{L}}{1\,\text{rev}} \times \frac{80\,\text{rev}}{1\,\text{min}} \times \frac{1\,\text{m}^3}{1000\,\text{L}} \times \frac{60\,\text{min}}{1\,\text{hr}} = \underline{10.6\,\frac{\text{m}^3}{\text{hr}}}$$

1.121 $$\text{Volume} = \frac{\pi \times 1\,\text{in}^2 \times 2.5\,\text{in}}{4} = \underline{1.963\,\frac{in^3}{rev}}$$

$$20\,\frac{\text{gal}}{\text{min}} = \frac{1.963\,\text{in}^3}{1\,\text{rev}} \times \frac{1\,\text{gal}}{231\,\text{in}^3} \times \frac{\text{X rev}}{\text{min}}$$

$$\text{X} = \frac{20\,\frac{\text{gal}}{\text{min}}}{\frac{1.963\,\text{in}^3}{1\,\text{rev}} \quad \frac{1\,\text{gal}}{231\,\text{in}^3}} = \underline{2{,}354\ \text{RPM}}$$

Applied Fluid Mechanics 8th edition Untener Solutions Manual

CHAPTER TWO

VISCOSITY OF FLUIDS

2.1 Shearing stress is the force required to slide one unit area layer of a substance over another.

2.2 Velocity gradient is a measure of the velocity change with position within a fluid.

2.3 Dynamic viscosity = shearing stress/velocity gradient.

2.4 Oil. It pours very slowly compared with water. It takes a greater force to stir the oil, indicating a higher shearing stress for a given velocity gradient.

2.5 $N \cdot s/m^2$ or $Pa \cdot s$

2.6 $lb \cdot s/ft^2$

2.7 1 poise = 1 $dyne \cdot s/cm^2$ = 1 $g/(cm \cdot s)$

2.8 It does not conform to the standard SI system. It uses obsolete basic units of dynes and cm.

2.9 Kinematic viscosity = dynamic viscosity/density of the fluid.

2.10 m^2/s

2.11 ft^2/s

2.12 1 stoke = 1 cm^2/s

2.13 It does not conform to the standard SI system. It uses obsolete basic unit of cm.

2.14 A newtonian fluid is one for which the dynamic viscosity is independent of the velocity gradient.

2.15 A nonnewtonian fluid is one for which the dynamic viscosity **is** dependent on the velocity gradient.

2.16 Water, oil, gasoline, alcohol, kerosene, benzene, and others.

2.17 Blood plasma, molten plastics, catsup, paint, and others.

2.18 $6.5 \cdot 10^{-4}$ $Pa \cdot s$

2.19 $1.5 \cdot 10^{-3}$ $Pa \cdot s$

2.20 $2.0 \cdot 10^{-5}$ $Pa \cdot s$

Applied Fluid Mechanics 8th edition Untener Solutions Manual

2.21 $1.1 \cdot 10^{-5}$ Pa·s

2.22 $3.0 \cdot 10^{-1}$ Pa·s

2.23 1.90 Pa·s

2.24 $3.2 \cdot 10^{-5}$ lb·s/ft^2

2.25 $8.9 \cdot 10^{-6}$ lb·s/ft^2

2.26 $3.6 \cdot 10^{-7}$ lb·s/ft^2

2.27 $1.9 \cdot 10^{-7}$ lb·s/ft^2

2.28 $5.0 \cdot 10^{-2}$ lb·s/ft^2

2.29 $4.1 \cdot 10^{-3}$ lb·s/ft^2

2.30 $3.3 \cdot 10^{-5}$ lb·s/ft^2

2.31 $2.8 \cdot 10^{-5}$ lb·s/ft^2

2.32 $2.1 \cdot 10^{-3}$ lb·s/ft^2

2.33 $9.5 \cdot 10^{-5}$ lb·s/ft^2

2.34 $1.3 \cdot 10^{-2}$ lb·s/ft^2

2.35 $2.2 \cdot 10^{-4}$ lb·s/ft^2

2.36 Viscosity index is a measure of how greatly the viscosity of a fluid changes with temperature.

2.37 High viscosity index (VI).

2.38 Rotating drum viscometer.

2.39 The fluid occupies the small radial space between the stationary cup and the rotating drum. Therefore, the fluid in contact with the cup has a zero velocity while that in contact with the drum has a velocity equal to the surface speed of the drum.

2.40 A meter measures the torque required to drive the rotating drum. The torque is a function of the drag force on the surface of the drum which is a function of the shear stress in the fluid. Knowing the shear stress and the velocity gradient, Equation 2-2 is used to compute the dynamic viscosity.

2.41 The inside diameter of the capillary tube; the velocity of fluid flow; the length between pressure taps; the pressure difference between the two points a distance L apart.
See Eq. (2-5).

Applied Fluid Mechanics 8th edition Untener Solutions Manual

2.42 Terminal velocity is that velocity achieved by the sphere when falling through the fluid when the downward force due to gravity is exactly balanced by the buoyant force and the drag force on the sphere. The drag force is a function of the dynamic viscosity.

2.43 The diameter of the ball; the terminal velocity (usually by noting distance traveled in a given time); the specific weight of the fluid; the specific weight of the ball.

2.44 The Saybolt viscometer employs a container in which the fluid can be brought to a known, controlled temperature, a small standard orifice in the bottom of the container and a calibrated vessel for collecting a 60 mL sample of the fluid. A stopwatch or timer is required to measure the time required to collect the 60 mL sample.

2.45 No. The time is reported as Saybolt Universal Seconds and is a relative measure of viscosity.

2.46 Kinematic viscosity.

2.47 Standard calibrated glass capillary viscometer.

For questions 2.48 to 2.53, Refer to Section 2.8 and to Internet resource 19 for Tribology-abc. Tables for SAE viscosity grades for engine oils and automotive gear lubricants are listed on the Internet site, from standards SAE J300 and SAE J306 that can be used to determine appropriate values for viscosities and information on the testing procedures used. NOTE: It is essential that the latest version of the standards be used for critical applications. See References 14 and 15.

2.48 The kinematic viscosity of SAE 20 oil must be between 5.6 and 9.3 cSt at 100°C using ASTM D 445. Its dynamic viscosity must be over 2.6 cP at 150°C using ASTM D 4683, D 4741, or D 5481. The kinematic viscosity of SAE 20W oil must be over 5.6 cSt at 100°C using ASTM D 445. Its dynamic viscosity for cranking must be below 9500 cP at −15°C using ASTM D 5293. For pumping it must be below 60,000 cP at −20°C using ASTM D 4684.

2.49 SAE 0W through SAE 60 for engine crankcase oils, depending on operating conditions.

2.50 SAE 70W through SAE 250 for gear-type transmissions, depending on operating conditions.

2.51 From Internet resource 19: 100°C using ASTM D 445 testing method and at 150° C using ASTM D 4683, D 4741, or D 5481.

2.52 From Internet resource 19: At −25°C using ASTM D 5293; at −30°C using ASTM D 4684; at 100°C using ASTM D 445.

2.53 From Internet resource 19: The kinematic viscosity of SAE 5W-40 oil must be between 12.5 and 16.3 cSt at 100°C using ASTM D 445. Its dynamic viscosity must be over 2.9 cP at 150°C using ASTM D 4683, D 4741, or D 5481. The kinematic viscosity must be over 3.8 cSt at 100°C using ASTM D 445. Its dynamic viscosity for cranking must be below 6600 cP at −30°C using ASTM D 5293. For pumping it must be below 60 000 cP at −35°C using ASTM D 4684.

2.54 ν = SUS/4.632 = 500/4.632 = 107.9 mm^2/s = 107.9 · 10^{-6} m^2/s
ν = 107.9 · 10^{-6} m^2/s [(10.764 ft^2/s)/(m^2/s)] = 1.162 · 10^{-3} ft^2/s

Applied Fluid Mechanics 8th edition Untener Solutions Manual

2.55 From Table 2.5: Viscosities at 40°C in mm^2/s of cSt

ISO Viscosity grade	Minimum	Nominal	Maximum
10	9.0	10.0	11.0
68	61.2	68.0	74.8
220	198	220	242
1000	900	1000	1100

2.56 $\eta = 4500$ cP $[(1$ Pa·s$)/(1000$ cP$)] =$ **4.50 Pa·s**
$\eta = 4.50$ Pa·s $[(1$ lb·s/ft$^2)/(47.88$ Pa·s$)] =$ **0.0940 lb·s/ft^2**

2.57 $\nu = 5.6$ cSt $[(1$ m^2/s$)/(10^6$ cSt$)] =$ **5.60×10^{-6} m^2/s**
$\nu = 5.60 \times 10^{-6}$ m^2/s $[(10.764$ ft^2/s$)/($m^2/s$)] =$ **6.03×10^{-5} ft^2/s**

2.58 From Figure 2.14: $\nu = 15.5$ mm^2/s $= 15.5 \times 10^{-6}$ m^2/s

2.59 $\eta = 6.5 \times 10^{-3}$ Pa·s $[(1$ lb·s/ft$^2)/(47.88$ Pa·s$)] =$ **1.36×10^{-4} lb·s/ft^2**

2.60 $\eta = 0.12$ poise $[(1$ Pa·s$)/(10$ poise$)] = 0.012$ Pa·s $= 1.2 \times 10^{-2}$ Pa·s. **SAE 10 oil**

2.61

$$\eta = \frac{(\gamma_s - \gamma_f)D^2}{18\upsilon} \quad \text{(Eq. 2-10)}$$

$\gamma_f = 0.94(9.81$ kN/m$^3) = 9.22$ kN/m^3
$D = 1.6$ mm $= 1.6 \times 10^{-3}$ m

$v = s/t = .250$ m$/10.4$ s $= 2.40 \times 10^{-2}$ m/s

$$\mu = \frac{(77.0 - 9.22)\text{kN}(1.6\times10^{-3}\text{ m})^2}{18\text{ m}^3(2.40\times10^{-2}\text{ m/s})} \times \frac{10^3\text{ N}}{\text{kN}} = 0.402\frac{\text{N}\cdot\text{s}}{\text{m}^2} = \mathbf{0.402\ Pa\cdot s}$$

2.62

$$\eta = \frac{(p_1 - p_2)D^2}{32\upsilon L} \quad \text{(Eq. 2-5)}$$

Use $\gamma_{\text{Mercury}} = 132.8$ kN/m^3 (App. B)
$\gamma_o = 0.90(9.81$ kN/m$^3) = 8.83$ kN/m^3

Manometer Eq. using principles of Chapter 3:

$p_1 + \gamma_o y + \gamma_o h - \gamma_m h - \gamma_o y = p_2$

$$p_1 - p_2 = \gamma_m h - \gamma_o h = h(\gamma_m - \gamma_o) = 0.177\text{ m}(132.8 - 8.83)\frac{\text{kN}}{\text{m}^3} = 21.94\frac{\text{kN}}{\text{m}^2}$$

$$\eta = \frac{(21.94\text{ kN/m}^2)(0.0025\text{ m})^2}{32(1.58\text{ m/s})(0.300\text{ m})} = 9.04\times10^{-6}\frac{\text{kN}\cdot\text{s}}{\text{m}^2} \times \frac{10^3\text{ N}}{\text{kN}} = \mathbf{9.04\times10^{-3}\ Pa\cdot s}$$

2.63 See Prob. 2.61. $\gamma_f = 0.94(62.4$ lb/ft$^3) = 58.7$ lb/ft^3: $D = (0.063$ in$)(1$ ft$/12$ in$) = 0.00525$ ft
$\nu = s/t = (10.0$ in$/10.4$ s$)(1$ ft$/12$ in$) = 0.0801$ ft/s: $\gamma_s = (0.283$ lb/in$^3)(1728$ in^3/ft$^3) = 489$ lb/ft^3

$$\eta = \frac{(\gamma_s - \gamma_f)D^2}{18\nu} = \frac{(489 - 58.7)\text{lb/ft}^3(0.00525\text{ ft})^2}{18(0.0801\text{ ft/s})} = 0.00823\text{ lb s/ft}^2 = 8.23\times10^{-3}\text{ lb·s/ft}^2$$

Applied Fluid Mechanics 8th edition Untener Solutions Manual

2.64 See Problem 2.62. Use $\gamma_m = 844.9$ lb/ft^3 (App. B): $\gamma_o = (0.90)(62.4 \text{ lb/ft}^3) = 56.16$ lb/ft^3
$h = (7.00 \text{ in})(1 \text{ ft}/12 \text{ in}) = 0.5833$ ft: $D = (0.100 \text{ in})(1 \text{ ft}/12 \text{ in}) = 0.00833$ ft
$p_1 - p_2 = h(\gamma_m - \gamma_o) = (0.5833 \text{ ft})(844.9 - 56.16) \text{ lb/ft}^3 = 460.1 \text{ lb/ft}^2$

$$\eta = \frac{(p_1 - p_2)D^2}{32vL} = \frac{(460.1 \text{ lb/ft}^2)(0.00833 \text{ ft})^2}{32(4.82 \text{ ft/s})(1.0 \text{ ft})} = 0.000207 \text{ lb s/ft}^2 = 2.07 \times 10^{-4} \text{ lb·s/ft}^2$$

2.65 From Fig. 2.14, kinematic viscosity = 78.0 SUS

2.66 From Fig 2.14, kinematic viscosity = 257 SUS

2.67 $\nu = 4.632(188) = 871$ SUS

2.68 $\nu = 4.632(244) = 1130$ SUS

2.69 From Fig. 2.15, $A = 0.996$. At 100°F, $\nu = 4.632(153) = 708.7$ SUS.
At 40°F, $\nu = 0.996(708.7) = 706$ SUS

2.70 From Fig. 2.15, $A = 1.006$. At 100°F, $\nu = 4.632(205) = 949.6$ SUS.
At 190°F, $\nu = 1.006(949.6) = 955$ SUS

2.71 $\nu = 6250/4.632 = 1349$ mm^2/s

2.72 $\nu = 438/4.632 = 94.6$ mm^2/s

2.73 From Fig. 2.14, $\nu = 12.5$ mm^2/s

2.74 From Fig 2.14, $\nu = 37.5$ mm^2/s

2.75 $t = 80°C = 176°F$. From Fig. 2.15, $A = 1.005$. At 100°F, $\nu = 4690/4.632 = 1012.5$ mm^2/s.
At 176°F (80°C): $\nu = 1.005(1012.5) = 1018$ mm^2/s.

2.76 $t = 40°C = 104°F$. From Fig. 2.15, $A = 1.00$. At 100°F, $\nu = 526/4.632 = 113.6$ mm^2/s.
At 176°F (80°C): $\nu = 1.000(113.6) = 113.6$ mm^2/s.

Applied Fluid Mechanics 8th edition Untener Solutions Manual

Problem 2.77

Convert kinematic viscosity for ISO grades from mm^2/s to SUS

ISO VG*					
Nominal		Minimum		Maximum	
(mm^2/s)	(SUS)	(mm^2/s)	(SUS)	(mm^2/s)	(SUS)
2.2	32.0	1.98	28.8	2.42	35.2
3.2	34.3	2.88	30.87	3.52	37.7
4.6	39.5	4.14	35.55	5.06	43.5
6.8	46.5	6.12	41.85	7.48	51.2
10	57.5	9.00	51.75	11.0	63.3
15	76.5	13.5	68.9	16.5	84.2
22	107	19.8	96.3	24.2	118
32	151	28.8	135.9	35.2	166
46	214	41.4	192.6	50.6	235
68	316	61.2	284.4	74.8	348
100	463	90	417	110	510
150	695	135	625	165	764
220	1019	198	917	242	1121
320	1482	288	1334	352	1630
460	2131	414	1918	506	2344
680	3150	612	2835	748	3465
1000	4632	900	4169	1100	5095
1500	6948	1350	6253	1650	7643
2200	10190	1980	9171	2420	11209
3200	14822	2880	13340	3520	16305

*First four values are called VG 2, 3, 5, and 7

NOTES: For VG $\geq$ 100 values computed from SUS = 4.664*n(mm^2s)

Other values read from graph in Figure 2.14

Minimum = Nom*0.9; Maximum = Nom*1.1

Applied Fluid Mechanics 8th edition Untener Solutions Manual