First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

SKU: 9781482257229-SOLUTIONS

CHAPTER 2

Problem 2.1

a) $e^{-2t}\frac{dy}{dt} = y^{-1}(1-e^{-2t});\quad y(0)=0$

$$ydy = e^{2t}(1-e^{-2t})dt \;=>>\; \frac{1}{2}y^2|_0^y = \int_0^t (e^{2t}-1)dt$$

$$\frac{1}{2}y^2 = \left(\frac{1}{2}e^{2t} - t\right)|_0^t$$

$$y = \sqrt{e^{2t}-2t-1}$$

b) $\frac{dy}{dt} = ycos(t) + y; \qquad y(0)=2$

$$\int_2^y \frac{dy}{y} = \int_0^t (\cos(t)+1)dt \;=>>\; \ln(y)|_2^y = (\sin(t)+t)|_0^t$$

$$\ln\left(\frac{y}{2}\right) = \sin(t)+t$$

$$y = 2\exp[\sin(t)+t]$$

c) $\frac{dy}{dt} = \frac{t+2}{y};\quad y(0)=2$

$$\int_2^y ydy = \int_0^t (t+2)dt \;=>>\; \frac{1}{2}y^2|_2^y = \frac{1}{2}t^2+2t|_0^t$$

$$y^2 - 4 = t^2 + 4t$$

$$y = \sqrt{t^2+4t+4}$$

d) $\frac{d}{dt}\left[t\frac{dy}{dt}\right] = 2t;\quad y(1)=1\;;\; y'(1)=3$

Let $u = t\frac{dy}{dt}$ with $u(1)=3$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

$$\frac{du}{dt} = 2t \;\; =>> \;\; \int_3^u du = \int_1^t 2t\, dt \;\; =>> \;\; u = t^2 + 2$$

$$u = t^2 + 2 = t\frac{dy}{dt} \;\; =>> \;\; \int_1^y dy = \int_1^t (t + 2t^{-1})\, dt$$

$$y - 1 = \frac{t^2}{2} + 2\ln(t) - \frac{1}{2}$$

$$y = \frac{t^2}{2} + 2\ln(t) + \frac{1}{2}$$

e) $\frac{d^2y}{dt^2} = 32e^{-4t} \quad y(0) = 1 \; ; \; y'(0) = 0$

$$\frac{d}{dt}\left[\frac{dy}{dt}\right] = 32e^{-4t}$$

Let $u = \frac{dy}{dt}$

Then, $$\frac{du}{dt} = 32e^{-4t}; \quad u(0) = 0$$

$$\int_0^u du = \int_0^t 32e^{-4t}dt \;\; =>> \;\; u = -\frac{32}{4}e^{-4t}|_0^t = -\frac{32}{4}e^{-4t} + \frac{32}{4}$$

$$u = \frac{dy}{dt} = 8 - 8e^{-4t}$$

$$\int_1^y dy = \int_0^t (8 - 8e^{-4t})dt \;\; =>> \;\; y - 1 = 8t + 2e^{-4t}|_0^t = 8t + 2e^{-4t} - 2$$

$$y = 8t + 2e^{-4t} - 1$$

f) $\frac{1}{t^2}\frac{dy}{dt} = y; \quad y(0) = 1$

$$\int_1^y \frac{dy}{y} = \int_0^t t^2 dt \;\; =>> \;\; \ln(y)\,|_1^y = \frac{1}{3}t^3|_0^t \;\; =>> \;\; \ln(y) = \frac{1}{3}t^3$$

$$y = e^{\frac{t^3}{3}}$$

g) $\frac{dy}{dt} = -y^2e^{2t}; \quad y(0) = 1$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

$$\int_1^4 \frac{dy}{y^2} = -\int_0^t e^{2t}dt \quad =>> \quad -\frac{1}{y}\Big|_1^y = -\frac{1}{2}e^{2t}\Big|_0^t \quad =>> \quad -\frac{1}{y} + 1 = -\frac{1}{2}e^{2t} + \frac{1}{2}$$

$$\frac{1}{y} = \frac{1}{2}(e^{2t} + 1) \quad =>> \quad y = \frac{2}{e^{2t}+1}$$

h) $\dfrac{dy}{dt} - (2t+1)y = 0; \quad y(0) = 2$

$$\frac{dy}{dt} = y(2t+1) \quad =>> \quad \int_2^y \frac{dy}{y} = \int_0^t (2t+1)dt \quad =>> \quad \ln(y)\Big|_2^y = (t^2+t)\Big|_0^t$$

$$\ln\left(\frac{y}{2}\right) = t^2 + t \quad =>> \quad y = 2e^{(t^2+t)}$$

i) $\dfrac{dy}{dt} + 4ty^2 = 0; \quad y(0) = 1$

$$\int_1^y \frac{dy}{y^2} = -\int_0^t 4tdt \quad =>> \quad -\frac{1}{y}\Big|_1^y = -2t^2\Big|_0^t$$

$$y = \frac{1}{1+2t^2}$$

j) $\dfrac{d^2y}{dt^2} = \cos\left(\dfrac{t}{2}\right); \quad y(0) = 0; \; y'(0) = 1$

Let $u = \frac{dy}{dt}$, then

$$\frac{du}{dt} = \cos\left(\frac{t}{2}\right); \quad u(0) = 1$$

$$\int_1^u du = \int_0^t \cos\left(\frac{t}{2}\right)dt$$

$$u = 1 + 2\sin\left(\frac{t}{2}\right)$$

and

$$\frac{dy}{dt} = 1 + 2\sin\left(\frac{t}{2}\right); \quad y(0) = 0$$

$$\int_0^y dy = \int_0^t \left(1 + 2\sin\left(\frac{t}{2}\right)\right)dt$$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

$$y = \left(t - 4\cos\left(\frac{t}{2}\right)\right)|_0^t = t - 4\cos\left(\frac{t}{2}\right) + 4$$

$$y = 4 + t - 4\cos\left(\frac{t}{2}\right)$$

Problem 2.2

a) $\frac{du}{dy} = y^2 - 1$ <<= *linear*

$$du = (y^2 - 1)dy$$
$$u = \frac{1}{3}y^3 - y + C$$

b) $\frac{dT}{dt} = -0.0002(T - 5)$ <<= linear

$$\frac{dT}{T-5} = -0.0002dt \quad =>> \quad \ln(T - 5) = -0.0002\mathrm{t} + \mathrm{C}_1$$

$$T = 5 + C\, e^{-0.0002t} \text{ where } C = e^{C_1}$$

c) $\frac{dy(x)}{dx} = e^{2y}$ <<= nonlinear

$$e^{-2y}dy = dx \quad =>> \quad -\frac{1}{2}e^{-2y} = x + C$$

$$y = -\frac{1}{2}\ln(C - 2x)$$

d) $\frac{du}{dt} = u^2\cos(\pi t) \quad u(0) = -\frac{1}{2}$ <<= nonlinear

$$\int_{-\frac{1}{2}}^{u}\frac{du}{u^2} = \int_0^t \cos(\pi t)\, dt \quad =>> \quad \frac{1}{u}|_{-\frac{1}{2}}^{u} = \frac{1}{\pi}\sin(\pi t)\,|_0^t$$
$$u = \frac{1}{-\frac{1}{\pi}\sin(\pi t) - 2}$$

e) $\frac{dy}{dt} = \left(\frac{y^2 + 4y - 5}{y}\right)t$ **<<==** nonlinear

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

$$\int \frac{y}{y^2+4y-5}\,dy = \int t\,dt$$

Use Partial Fraction to simplify the first integrand.

$$\frac{y}{y^2+4y-5} = \frac{A_1}{y-1} + \frac{A_2}{y+5}$$

and from here $A_1 = \frac{1}{6}$ and $A_2 = \frac{5}{6}$. Therefore,

$$\int \frac{1/6}{y-1}\,dy + \int \frac{5/6}{y+5}\,dy = \int t\,dt$$

$$\frac{1}{6}\ln(y-1) + \frac{5}{6}\ln(y+5) = \frac{1}{2}t^2 + C$$

f) $\frac{du}{dt} = u^3 + 6u^2 + 11u + 6$ **<<==** nonlinear

$$\int \frac{1}{u^3+6u^2+11u+6}\,du = \int dt$$

Use Partial Fractions to simplify the first integrand.

$$\frac{1}{u^3+6u^2+11u+6} = \frac{A_1}{u+1} + \frac{A_2}{u+2} + \frac{A_3}{u+3}$$

and from here $A_1 = \frac{1}{2}$; $A_2 = -1$; and $A_3 = \frac{1}{2}$. Therefore,

$$\int \frac{1/2}{u+1}\,du - \int \frac{1}{u+2}\,du + \int \frac{1/2}{u+3}\,du = \int dt$$

$$\frac{1}{2}\ln(u+1) - \ln(u+2) + \frac{1}{2}\ln(u+3) = t + C$$

Problem 2.3

$$-\frac{10C^S}{12+C^S} = \frac{dC^S}{dt}$$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

Using Separation of Variables,

$$\int_{13.33}^{C^S} \frac{12+C^S}{10C^S} dC^S = 1.2\int_{13.33}^{C^S} \frac{1}{C^S} dC^S + 0.1\int_{13.33}^{C^S} dC^S = -\int_0^t dt$$

and after evaluating the integrals

$$t = 4.44 - 1.2\ln C^S - 0.1C^S$$

Problem 2.4

$$\tau \frac{dy(t)}{dt} + y(t) = Kx(t)$$

$$\int_{y(0)}^{y(t)} \frac{dy(t)}{Kx(t)-y(t)} = \frac{1}{\tau}\int_0^t dt \;\; =>> \;\; \ln[Kx(t)-y(t)]\,|_{y(0)}^{y(t)} = -\frac{t}{\tau}$$

$$\ln[Kx(t)-y(t)] - \ln[Kx(t)-y(0)] = -\frac{t}{\tau}$$

$$\frac{Kx(t)-y(t)}{Kx(t)-y(0)} = e^{-\frac{t}{\tau}}$$

$$y(t) = Kx(t) - [Kx(t)-y(0)]e^{-\frac{t}{\tau}}$$

and using $x(t) = x(0) + D$,

$$y(t) = K(x(0)+D) - [K(x(0)+D) - y(0)]e^{-\frac{t}{\tau}}$$

and with $y(0) = K\,x(0)$,

$$y(t) = y(0) + KD - [y(0) + KD - y(0)]e^{-\frac{t}{\tau}}$$

$$y(t) = y(0) + KD\left(1 - e^{-\frac{t}{\tau}}\right)$$

Problem 2.5

$$2\frac{dv}{dt} + 4v = 16u(t) \quad \text{with} \;\; v(0) = 0$$

$$\int_0^v \frac{dv}{16-4v} = \int_0^t \frac{1}{2} dt \;\; =>> \;\; -\frac{1}{4}\ln(16-4v)\,|_0^v = \frac{1}{2}t$$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

$$\ln(16-4v)-\ln(16)=-2t \quad =>> \quad \ln\left(\frac{16-4v}{16}\right)=-2t$$

$$v=4(1-e^{-2t})$$

Problem 2.6

$$i_1=1.43\times10^{-4}v_s+0.286i_2 \qquad (1)$$

$$2\times10^{-3}\frac{di_2}{dt}+21428i_2=0.286v_s \qquad (2)$$

From (2): $$9.3\times10^{-8}\frac{di_2}{dt}+i_2=1.33\times10^{-5}v_s$$

where $$\tau=9.3\times10^{-8}sec, \quad and \quad K=1.33\times10^{-5}\frac{V}{A}$$

From Problem 2-5, $$i_2=i_2(0)+KD\left(1-e^{-\frac{t}{\tau}}\right)$$

$$i_2=2.66\times10^{-4}+0.000267\left(1-e^{-\frac{t}{9.3\times10^{-8}}}\right)$$

From (1):

$$i_1=57.2\times10^{-4}+0.76\times10^{-4}+7.64\times10^{-5}\left(1-e^{-\frac{t}{9.3\times10^{-8}}}\right)$$

$$i_1=57.96\times10^{-4}+0.76\times10^{-4}\left(1-e^{-\frac{t}{9.3\times10^{-8}}}\right)$$

Problem 2.7

$$0.3768X\left(1-\frac{X}{18.91}\right)=\frac{dX}{dt}$$

Using Separation of Variables,

$$\frac{dX}{X\left(1-\frac{X}{18.91}\right)}=0.3768\,dt$$

$$\frac{dX}{X(18.91-X)}=0.02\,dt$$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

Using Partial Fractions Expansion,

$$\frac{1}{X\left(18.91-X\right)}=\frac{A_1}{X}+\frac{A_2}{18.91-X}$$

$$\frac{1}{X\left(18.91-X\right)}=\frac{(A_2-A_1)X+18.91A_1}{X\left(18.91-X\right)}$$

Equating equal terms yields,

$$A_1=A_2=0.053$$

Then,

$$0.053\left[\int_{9.52}^{X}\frac{dX}{X}+\int_{9.52}^{X}\frac{dX}{18.91-X}\right]=0.02\int_0^t dt$$

$$\ln\left[\frac{0.986X}{18.91-X}\right]=0.377t$$

$$X=\frac{18.91e^{0.377t}}{0.986+e^{0.377t}}$$

Problem 2.8

$$6.915C_V\sqrt{1000-P(t)}=1.08\frac{dP(t)}{dt}$$

Using Separation of Variables

$$\frac{dP(t)}{\sqrt{1000-P(t)}}=\frac{6.915C_V}{1.08}dt$$

And using the information given in the statement

$$\int_{100}^{500}\frac{dP(t)}{\sqrt{1000-P(t)}}=\frac{6.915C_V}{1.08}\int_0^4 dt$$

$$-2\sqrt{1000-P(t)}\Big|_{100}^{500}=\frac{6.915C_V}{1.08}t\Big|_0^4$$

And solving for C_V, $C_V=0.596$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

Problem 2.9

$$\frac{dC^A}{dt} = -85.28\left(C^A\right)^2\left(0.132 + 0.5C^A\right)$$

Using Separation of Variables,

$$\frac{dC^A}{\left(C^A\right)^2\left(0.132 + 0.5C^A\right)} = -85.28\,dt$$

Using partial fractions expansion we factor the term on the left side

$$, \frac{1}{\left(C^A\right)^2\left(0.132 + 0.5C^A\right)} = \frac{A_1}{\left(C^A\right)^2} + \frac{A_2}{C^A} + \frac{A_3}{0.132 + 0.5C^A}$$

From here

$$\frac{1}{\left(C^A\right)^2\left(0.132 + 0.5C^A\right)} = \frac{(A_3 + 0.5A_2)\left(C^A\right)^2 + (0.5A_1 + 0.132A_2)C^A + 0.132A_1}{\left(C^A\right)^2\left(0.132 + 0.5C^A\right)}$$

and equating equal numerator coefficients $A_1 = 7.58\,;\, A_2 = -28.71\,;\, A_3 = 14.36$

Then,

$$7.58\int_{1.842}^{C^A}\frac{dC^A}{\left(C^A\right)^2} - 28.71\int_{1.842}^{C^A}\frac{dC^A}{C^A} + 14.36\int_{1.842}^{C^A}\frac{dC^A}{0.132 + 0.5C^A} = -85.28\int_0^t dt$$

And after evaluating the integrals,

$$t = 0.18\,h$$

Problem 2.10

$12.5\ \frac{dx_3^{NaOH}}{dt} + x_3^{NaOH} = 0.73\ x_1^{NaOH}$ with $x_3^{NaOH}(0) = 0.55$ and $x_1^{NaOH} = 0.75 - 0.08\,u(t)$

$$12.5\ \frac{dx_3^{NaOH}}{dt} = 0.73\ x_1^{NaOH} - x_3^{NaOH} = 0.73(0.67) - x_3^{NaOH}$$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

or

$$12.5\,\frac{dx_3^{NaOH}}{dt} = [0.4891 - x_3^{NaOH}](1)$$

Using Separation of Variables

$$\int_{0.55}^{x_3^{NaOH}} \frac{dx_3^{NaOH}}{0.4891 - x_3^{NaOH}} = \frac{1}{12.5}\int_0^t dt \quad =>> \quad \ln(0.4891 - x_3^{NaOH})\Big|_{0.55}^{x_3^{NaOH}} = -\frac{t}{12.5}$$

$$\frac{0.4891 - x_3^{NaOH}}{-0.0609} = e^{-\frac{t}{12.5}} \quad =>> \quad x_3^{NaOH} = 0.4891 + 0.0609e^{-\frac{t}{12.5}}$$

and

$$x_3^{NaOH} = 0.4891 + 0.0609e^{-\frac{t}{12.5}} = 0.55 - 0.0609(1 - e^{-\frac{t}{12.5}})$$

Problem 2.11

a)

$$m\frac{dv}{dt} = \sum F_y = F_g + F_d + F_T = -mg - kv + 2u(t)$$

$$0.05\frac{dv}{dt} = -0.05(9.8) - 0.01v + 2u(t)$$

$$0.05\frac{dv}{dt} + 0.01v = -0.49 + 2u(t) \quad \text{with} \quad v_y(0) = 0\,m/s$$

Using Separation of Variables

$$\int_0^{v_y} \frac{1}{1.51 - 0.01v_y}\,dv_y = \int_0^t 20\,dt$$

and

$$v_y(t) = 151(1 - e^{-0.2t}) \quad \rightarrow \quad v_y(2) = 151(1 - e^{-0.4}) = 49.8\,m/s$$

b)

$$m\frac{dv}{dt} = \sum F_y = F_g + F_d = -mg - kv$$

$$0.05\frac{dv}{dt} + 0.01v = -0.49$$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

Using Separation of Variables

$$\int_{49.8}^{0} \frac{1}{-0.49-0.01v_y}\,dv_y = \int_2^t 20\,dt$$

$$-\frac{1}{0.01}\ln\left(-0.49-0.01v_y\right)\Big|_{49.8}^{0} = 20(t-2)$$

and using algebra

$$t = 2-5\ln\left(\frac{-0.49}{-0.49-0.01(49.8)}\right) = 5.5\,s$$

Thus, after the thrusts stop, the rocket continues upward for 3.5 seconds more.

Problem 2.12

a)

$$m\frac{dv}{dt} = -kv \quad \text{with} \quad v(0) = 50\,m/s$$

$$\frac{dx}{dt} = v \quad \text{with} \quad x(0) = 0\,m$$

b)

$$\frac{dv}{dt} = -\frac{100}{500}v = -0.2v \quad \Rightarrow \quad \int_{50}^{v}\frac{dv}{v} = -0.2\int_0^t dt \quad \Rightarrow \quad \ln v\Big|_{50}^{v} = -0.2t$$

$$v = 50e^{-0.2t} \quad \text{and for} \quad v = 1\,m/s\,, \quad t = 19.5\,s$$

c)


$$\int_0^x dx = \int_0^{19.5} v\,dt = 50\int_0^{19.5} e^{-0.2t}\,dt$$

$$x = -\frac{50}{0.2}e^{-0.2t}\Big|_0^{19.5} = 245\,m$$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

Problem 2.13

Going Up

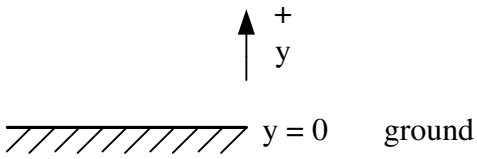

$$\sum F_y = ma_y = m\,\frac{dv_y}{dt} \qquad (1)\ 1\ eq\ 2\ unk\left[\sum F_y\,, v_y\right]$$

Assuming no air resistance: $\sum F_y = F_g = -mg$ $\qquad (2)\ 2\ eq\ 2\ unk$

Substituting (2) into (1) and rearranging,

$$\frac{dv_y}{dt} = -g \quad (3) \quad \text{with} \quad v_y(0) = 35\ m/s$$

Maximum height is when $v_y = 0\frac{m}{s}$

From (3)

$$\int_{35}^{0} dv_y = -g\int_0^t dt \quad =>> \quad v_y|_{35}^{0} = -gt|_0^t \quad =>> \quad 0 - 35 = -gt$$

$$t = 3.57\ sec$$

We can also obtain an expression for v_y

$$\int_{35}^{v_y} dv_y = -g\int_0^t dt$$

$$v_y = 35 - gt = 35 - 9.8t$$

For the maximum height,

$$\frac{dy}{dt} = v_y \quad =>> \quad \int_0^y dy = \int_0^t v_y dt = \int_0^t (35 - 9.8t)dt$$

$$y = 35t - 4.9t^2$$

Then, at $t = 3.57\ s$ $\qquad y_{max} = 35(3.57) - 4.9(3.57)^2$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

$$y_{max} = 62.5\ m$$

Going Down

$$\sum F_y = ma_y = m\frac{dv_y}{dt} \quad (4)\ 1\ \text{eq.}, 2\ \text{unk}\left[\sum F_y \quad , v_y\right]$$

Assuming no air resistance,

$$\sum F_y = F_g = -mg \qquad (5)\ 2\ \text{eq.}, 2\ \text{unk.}$$

$$\frac{dy}{dt} = v_y \qquad (6)\ 3\ eq\ 3\ unk\ [\text{y}]$$

Substituting (5) into (4) and rearranging,

$$\frac{d\,v_y}{dt} = -g \quad =>> \quad \int_0^{v_y} dv_y = -g\int_0^t dt \quad =>> \quad v_y = -gt \quad (7)$$

Using (7) in (6):

$$\frac{dy}{dt} = -gt \quad =>> \quad \int_{62.5}^{y} dy = -g\int_0^t tdt \quad =>> \quad y = 62.5 - 4.9t^2 \quad (8)$$

For t, $y = 0$

$$t = 3.57\ sec$$

Problem 2.14

$$\sum F_y = ma_y = m\frac{dv_y}{dt} \qquad (1)\ 1\ eq., 2\ unk\ [\sum F_y, v_y]$$

Considering air resistance (drag force due to air)

$$\sum F_y = F_g + F_d = -mg - 1.0\left|v_y\right|v_y \qquad (2)\ 2\ \text{eq.}, 2\ \text{unk.}$$

Eqs (1) and (2) constitute the model for the velocity. For the position,

$$\frac{dy}{dt} = v_y \qquad (3)\ 3\ eq\ 3\ unk\ [y]$$

Units of 1 are $\frac{N}{m^2/s^2}$.

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

Problem 2.15

$$\sum F_y = ma_y = m\frac{dv_y}{dt} \quad (1)\ 1\ eq., 3\ unk\ \left[\sum F_y, m, v_y\right]$$

Considering air resistance

$$\sum F_y = F_g + F_d = -mg - 1.0v_y \quad (2) 2\ eq., 3\ unk$$

$$\frac{dy}{dt} = v_y \qquad (3)\ 3\ eq., 4\ unk\ [y]$$

We need one more equation; at this time there is still one degree of freedom. We don't really have any more equations but, there is a specification $y(0) = 30\ m$ and after 3 sec, $y(3) = 0\ m$, that we may use. So:

$$y(3) = 0\ m \qquad (4)\ \ 4\ eq., 4\ unk$$

Substituting (2) into (1):

$$m\frac{dv_y}{dt} = -mg - 1.0v_y = -1\left(mg + v_y\right)$$

and using Separation of Variables,

$$\int_0^{v_y} \frac{dv_y}{mg+v_y} = -\frac{1}{m}\int dt \quad =>> \quad ln\left(mg + v_y\right)\Big|_0^{v_y} = -\frac{t}{m}$$

$$\ln\left(mg + v_y\right) - \ln(mg) = -\frac{t}{m} \quad =>> \quad \ln\left(\frac{mg+v_y}{mg}\right) = -\frac{t}{m}$$

$$v_y = mg\left(e^{-\frac{t}{m}} - 1\right) \qquad (5)$$

Substituting (5) into (3): $\frac{dy}{dt} = mg\left(e^{-\frac{t}{m}} - 1\right)$

$$\int_{30}^{0} dy = mg\int_0^3 \left(e^{-\frac{t}{m}} - 1\right)dt \quad =>> \quad 0 - 30 = \left(-m^2 g e^{-\frac{t}{m}} - mgt\right)\Big|_0^3$$

$$-30 = -m^2 g e^{-\frac{3}{m}} + m^2 g - 3mg$$

By trial and error: $m \approx 2.3\ kg$

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

Problem 2.16

$$\rho A\frac{dh}{dt}+C_v\sqrt{h}=w_1+w_2$$

When both inlet flows are shut-off, $w_1=w_2=0.\ So,$

$$\rho A\frac{dh}{dt}+C_v\sqrt{h}=0 \quad =>> \quad \int_{3.24}^{h}\frac{dh}{\sqrt{h}}=-\frac{C_v}{\rho A}\int_0^t dt \quad =>> \quad 2\sqrt{h}|_{3.24}^{h}=-\frac{C_v}{\rho A}t|_0^t$$

$$h=(1.8-0.571t)^2$$

Drain tank: $h=0$

$$t=3.15\,min$$

Problem 2.17

a) For the first part, assume there is no chute that is, no frag force. In that case the model is

$$m\frac{dv}{dt}=-F_{brake} \quad \Rightarrow \quad \frac{dv}{dt}=-F_{brake}/m=-16200/900=-18\,m/s^2$$

Integrating once:

$$v=v_0-18\,t \qquad (1)$$

Integrating again:

$$x=x_0+v_0t-9\,t^2 \qquad (2)$$

To find the stopping distance, set $v_0 = 120$, $v = 0$, and $x_0 = 0$. Equation 1 is rearranged to:

$$t=(v_0-v)/18=120/18=6.6666\,\text{sec}$$

This is the stopping time in the absence of a parachute. Substituting for t, v_0 and x_0 in Equation 2 yields the stopping distance:

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

$$x = x_0 + v_0 t - 9\,t^2 = 0 + 120 * (6.6666) - 9 * (6.6666)^2 = 400\,m$$

This is twice the desired stopping distance so a parachute is needed.

b) Now the model is

$$m\frac{dv}{dt} = -F_{brake} - \frac{1}{2}\rho C_D A v^2 \qquad \text{v(0) = 120}$$

$$\frac{dx}{dt} = v \qquad \text{x(0) = 0}$$

The goal is to find the chute area A that will result in a velocity of zero when the position is 200 m. Then the chute diameter d can be found from $A = \pi d^2/4$. This problem can be solved analytically but it is somewhat tedious. Better yet is to solve it using simulation, Chapter 11.

Problem 2.18

a) No parachute

$$m\frac{dv_y}{dt} = F_d = -mg \quad \text{with} \quad v_y(0) = 0\,m/s \qquad (1)$$

1 equation, 1 unknown [v_y]

$$v_y = \frac{dy}{dt} \quad \text{with} \quad y(0) = y_{initial}\,m \qquad (2)$$

2 equations, 2 unknowns [y]

b) After 10 seconds

From Equation 1, using Antidifferentiation,

$$\int_0^{v_y} dv_y = -9.8\int_0^t dt \quad \Rightarrow \quad v_y = -9.8t\,m/s$$

and at $t = 10\,s$, $v_y\big|_{t=10} = -98\,m/s$. From Equation 2,

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

$$\int_{y_{initial}}^{y} dy = \int_0^t v_y\,dt \quad \Rightarrow \quad y = y_{initial} - 9.8\int_0^t t\,dt = y_{initial} - 4.9t^2$$

and at $t = 10\,s$, the distance covered is $y\big|_{t=10} = y_{initial} - 490\,m$.

c) Open parachute

$$m\frac{dv_y}{dt} = \Sigma F = -mg - Pv_y \quad \text{with} \quad v_y(0) = v_y\big|_{t=10} = -98\,m/s \qquad (3)$$

1 equation, 1 unknown [v_y]

$$v_y = \frac{dy}{dt} \quad \text{with} \quad y(0) = y\big|_{t=10} = y_{initial} - 490\,m \qquad (4)$$

2 equations, 2 unknowns [y]

From Equation 3, and using Separation of Variables,

$$\int_{-98}^{v_y} \frac{dv_y}{mg + Pv_y} = -\frac{1}{m}\int_{10}^{t} dt \quad \Rightarrow \quad \frac{1}{P}\ln\left(\frac{mg + Pv_y}{mg - 98P}\right) = -\frac{1}{m}(t-10) \quad \Rightarrow v_y = \frac{1}{P}\left[\left(mg - 98P\right)e^{-\frac{P}{m}(t-10)} - mg\right]$$

$$v_y = \frac{1}{200}\left[\left(980 - 19600\right)e^{-2(t-10)} - 980\right] = -93.1\,e^{-2(t-10)} - 4.9 \qquad (5)$$

From Equations 4 and 5,

$$\int_{y_{initial}-490}^{y} dy = \int_{10}^{t} v_y\,dt = \int_{10}^{t}\left(-93.1\,e^{-2(t-10)} - 4.9\right)dt$$

$$y = y_{initial} - 490 + \left[46.55\,e^{-2(t-10)} - 4.9t\right]\Big|_{10}^{t} = y_{initial} - 487.55 + \left[46.55\,e^{-2(t-10)} - 4.9t\right] \qquad (6)$$

From Equation 5 we obtain the time it takes to reach a velocity of -5 m/s. This time is from the moment the person jumps from the building and equals 13.42 s.

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

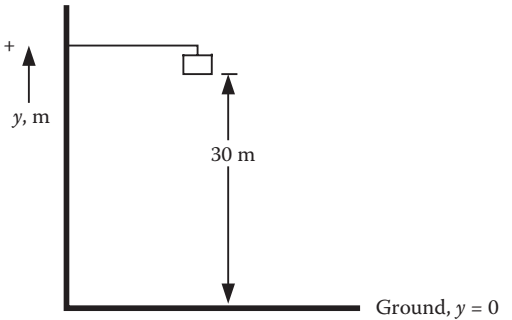


FIGURE 2.1
Object held aboveground.

First Course in Differential Equations Modeling and Simulation 2nd edition Smith Solutions Manual