Applied Strength of Materials 6th edition Mott Solutions Manual

SKU: 9781498716758-SOLUTIONS

Chapter 2 Design Properties of Materials

Only those problems requiring numerical data are shown.

2-14 $s_u = 90$ ksi (621 MPa); $s_y = 60$ ksi (414 MPa); 25% Elongation [Appendix A-10]

Because % Elongation >5%, it is ductile.

2-15 1020 HR: 36% Elongation – **Greater ductility** [Appendix A-10]

1040 HR: 25% Elongation

2-16 SAE 1141 OQT 700: High sulfur alloy steel with 0.41% carbon, quenched in oil, tempered at 700°F. [Appendix A-10]

2-17 Yes, AISI 1141 steel has: $s_y = 172$ ksi @ OQT 700, $s_y = 129$ ksi @ OQT 900

By interpolation, $s_y \approx 150$ ksi @ OQT 800. [Appendix A-10]

2-18 $E = 30 \times 10^6$ psi (207 GPa) For all carbon and alloy steels. [Appendix A-10]

2-19 $Wt = \text{Density} \times \text{Volume} = (0.283 \text{ lb/in}^3)(1.0)(4.0)(14.5)\text{in}^3 = \mathbf{16.4\ lb}$

[Appendix A-10] Value of lb_m = Value of lb force (Wt)

2-20 $\text{Volume} = \text{Area} \times \text{Length} = \frac{\pi}{4}(50)^2 \times 250 = 4.909 \times 10^5 \text{ mm}^3$

$\text{Steel Bar: Mass} = \frac{7680 \text{ kg}}{\text{m}^3} \times \frac{4.909 \times 10^5 \text{ mm}^3}{1} \times \frac{1 \text{ m}^3}{(10^3 \text{ mm})^3} = 3.77 \text{ kg}$ [Appendix A-10]

$Wt = m \cdot g = 3.77 \text{ kg} \cdot 9.81 \text{ m/s}^2 = 36.98 \text{ kg} \cdot \text{m/s}^2 = \mathbf{36.98\ N}$

2-21 Magnesium would stretch more because it has a lower E.

$E_{Mag} = 45$ GPa; $E_{Ti} = 114$ GPa; Ti is stiffer. [Appendix A-11]

2-23 Alloy of aluminum with silicon and magnesium. Heat treated to T6 temper.

2-24

	s_u	s_y	E	Density
6061-0	18 ksi	8 ksi	10×10^6 psi	0.10 lb/in^3
6061-T4	35 ksi	21 ksi	10×10^6 psi	0.10 lb/in^3
6061-T6	45 ksi	40 ksi	10×10^6 psi	0.10 lb/in^3

[Appendix A-14]

2-29 $s_{ut} = 40$ ksi; $s_{uc} = 140$ ksi [Appendix A-13]

2-31 Bending $\sigma_d = 1450$ psi; Tension $\sigma_d = 850$ psi; Compression 1000 psi Parallel to grain, 385 psi Perpendicular to grain; Shear $\tau_d = 95$ psi [Appendix A-15]

2-32 2000 to 7000 psi [Section 2-11]

Applied Strength of Materials 6th edition Mott Solutions Manual

2-44 Graphite fibers.

2-45 S-glass, quartz fibers, tungsten fibers coated with silicon carbide

2-51

Material	Specific strength (in)	Ratio to SAE 1020
Graphite/Epoxy (High Strength)	4.86×10^6	25.0
Aramid/Epoxy Composite	4.00×10^6	20.6
Boron/Epoxy Composite	3.60×10^6	18.5
Graphite/Epoxy (Ultra-high mod.)	2.76×10^6	14.2
Glass/Epoxy Composite	1.87×10^6	9.63
Titanium Ti-6Al-4V	1.00×10^6	5.15
SAE 5160 OQT 700 Steel	0.929×10^6	4.78
Aluminum 7075-T6	0.822×10^6	4.23
Aluminum 6061-T6	0.459×10^6	2.36
SAE 1020 HR Steel	0.194×10^6	1.00

2-52

Material	Specific modulus (in)	Ratio to SAE 1020
Graphite/Epoxy (Ultra-high mod.)	8.28×10^8	7.81
Boron/Epoxy Composite	4.00×10^8	3.77
Graphite/Epoxy (High Strength)	3.45×10^8	3.25
Aramid/Epoxy Composite	2.20×10^8	2.07
SAE 1020 HR Steel	1.06×10^8	1.00
SAE 5160 OQT 700 Steel	1.06×10^8	1.00
Titanium Ti-6Al-4V	1.03×10^8	0.97
Aluminum 6061-T6	1.02×10^8	0.96
Aluminum 7075-T6	0.99×10^8	0.93
Glass/Epoxy Composite	0.66×10^8	0.62

2-60 $V_m = 1.0 - V_f = 1.0 - 0.60 = 0.40$

2-61 See Equation (2-10)

2-62 See Equations (2-11), (2-12), (2-13), (2-14)

Applied Strength of Materials 6th edition Mott Solutions Manual

2-63 Given: $V_f = 0.50$; Fibers are high strength carbon-PAN; Matrix is Epoxy

See Table 2-15 for data. $V_m = 1 - V_f = 1\ 0 - 0.50 = 0.50$

Use Equation (2-10): $s_{uc} = s_{uf}\ V_f + \sigma_m'\ V_m$

Strain at which fibers would fail: $\varepsilon_f = s_{uf}\ / E_f = (820\text{x}\ 10^3\ \text{psi})/(40\text{x}10^6\ \text{psi})$

$\varepsilon_f = 0.0205$

Stress in matrix at this strain: $\sigma_m' = E_m\ \varepsilon = (0.56\text{x}10^6\ \text{psi})(0.0205) = 11\ 480\ \text{psi}$

Then: $s_{uc} = (820\text{x}\ 10^3\ \text{psi})(0.50) + (11\ 480\ \text{psi})(0.50) = \underline{415\text{x}10^3\ \text{psi}}$

Modulus of elasticity: $E_c = E_f\ V_f + E_m\ V_m = (40\text{x}10^6)(0.5) + (0.56\text{x}10^6)(0.50)$

$\underline{E_c = 20.3\text{x}10^6\ \text{psi}}$

Specific weight: $\gamma_c = \gamma_f\ V_f + \gamma_m\ V_m = (0.065)(0.50) + (0.047)(0.50)$

$\underline{\gamma_c = 0.056\ \text{lb/in}^3}$

2-64 Given: $V_f = 0.50$; Fibers are high modulus carbon; Matrix is Epoxy

See Table 2-15 for data. $V_m = 1 - V_f = 1\ 0 - 0.50 = 0.50$

Use Equation (2-10): $= s_{uf}\ V_f + \sigma_m'\ V_m$

Strain at which fibers would fail: $\varepsilon_f = s_{uf}\ / E_f = (325\text{x}\ 10^3\ \text{psi})/(100\text{x}10^6\ \text{psi})$

$\varepsilon_f = 0.00325$

Stress in matrix at this strain: $\sigma_m' = E_m\ \varepsilon = (0.56\text{x}10^6\ \text{psi})(0.00325) = 1820\ \text{psi}$

Then: $s_{uc} = (325\text{x}\ 10^3\ \text{psi})(0.50) + (1820\ \text{psi})(0.50) = \underline{163\text{x}10^3\ \text{psi}}$

Modulus of elasticity: $E_c = E_f\ V_f + E_m\ V_m = (100\text{x}10^6)(0.5) + (0.56\text{x}10^6)(0.50)$

$\underline{E_c = 50.3\text{x}10^6\ \text{psi}}$

Specific weight: $\gamma_c = \gamma_f\ V_f + \gamma_m\ V_m = (0.078)(0.50) + (0.047)(0.50)$

$\underline{\gamma_c = 0.0625\ \text{lb/in}^3}$

2-65 Given: $V_f = 0.50$; Fibers are aramid; Matrix is Epoxy

See Table 2-15 for data. $V_m = 1 - V_f = 1\ 0 - 0.50 = 0.50$

Use Equation (2-10): $s_{uc} = s_{uf}\ V_f + \sigma_m'\ V_m$

Strain at which fibers would fail: $\varepsilon_f = s_{uf}\ / E_f = (500\text{x}\ 10^3\ \text{psi})/(19\text{x}10^6\ \text{psi})$

$\varepsilon_f = 0.0263$

Stress in matrix at this strain: $\sigma_m' = E_m\ \varepsilon = (0.56\text{x}10^6\ \text{psi})(0.0263) = 14\ 740\ \text{psi}$

Then: $s_{uc} = (500\text{x}\ 10^3\ \text{psi})(0.50) + (14\ 740\ \text{psi})(0.50) = \underline{257\text{x}10^3\ \text{psi}}$

Modulus of elasticity: $E_c = E_f\ V_f + E_m\ V_m = (19\text{x}10^6)(0.5) + (0.56\text{x}10^6)(0.50)$

$\underline{E_c = 9.78\text{x}10^6\ \text{psi}}$

Specific weight: $\gamma_c = \gamma_f\ V_f + \gamma_m\ V_m = (0.052)(0.50) + (0.047)(0.50)$

$\underline{\gamma_c = 0.0495\ \text{lb/in}^3}$

Applied Strength of Materials 6th edition Mott Solutions Manual

Solutions to Problems 2-66 to 2-77: Some data are approximated from Figure P2-66.

- The most accurate values are for ultimate strength (b.) and % elongation (f.).
- The elastic limit (d.) is estimated between the proportional limit (c.) and yield strength (a.).
- The modulus of elasticity (e.) is computed from [Δ stress / Δ strain], the slope of the straight-line part of each curve.
- Listed materials are found in Appendixes A-10 – A-14, matching s_u, s_y, E, and % elongation.

2-66
a. $s_y = 73$ ksi; Offset method
b. $s_u = 83$ ksi
c. $s_p = 60$ ksi
d. $s_{el} = 67$ ksi
e. $E = 10.0 \times 10^6$ psi
f. 11% elongation
g. Ductile
h. Aluminum
i. 7075-T6

2-67
a. $s_y = 173$ ksi; Yield point
b. $s_u = 187$ ksi
c. $s_p = 162$ ksi
d. $s_{el} = 168$ ksi
e. $E = 29.0 \times 10^6$ psi
f. 15% elongation
g. Ductile
h. Steel
i. SAE 4140 OQT 900

2-68
a. $s_y = 62$ ksi; Offset method
b. $s_u = 75$ ksi
c. $s_p = 50$ ksi
d. $s_{el} = 56$ ksi
e. $E = 16.7 \times 10^6$ psi
f. 15% elongation
g. Ductile
h. Copper alloy
i. C54400 Bronze-Hard

2-69
a. $s_y = 49$ ksi; Yield point
b. $s_u = 65$ ksi
c. $s_p = 46$ ksi
d. $s_{el} = 48$ ksi
e. $E = 26.5 \times 10^6$ psi
f. 36% elongation
g. Ductile
h. Steel
i. SAE 1020 CD

2-70
a. No yield strength-Brittle
b. $s_u = 55$ ksi
c. $s_p = 50$ ksi
d. $s_{el} = 53$ ksi
e. $E = 20.0 \times 10^6$ psi
f. 0.5% elongation
g. Brittle
h. Cast iron
i. ASTM A48 Grade 60

2-71
a. $s_y = 53$ ksi; Offset Method
b. $s_u = 59$ ksi
c. $s_p = 31$ ksi
d. $s_{el} = 42$ ksi
e. $E = 12.0 \times 10^6$ psi
f. 5.0% elongation
g. Borderline Ductile/Brittle
h. Zinc
i. Cast ZA-12

2-72
a. $s_y = 35$ ksi; Yield point
b. $s_u = 57$ ksi
c. $s_p = 30$ ksi
d. $s_{el} = 27$ ksi
e. $E = 26.0 \times 10^6$ psi
f. 21% elongation
g. Ductile
h. Structural Steel
i. ASTM A36

2-73
a. $s_y = 19$ ksi; Offset Method
b. $s_u = 40$ ksi
c. $s_p = 14$ ksi
d. $s_{el} = 17$ ksi
e. $E = 6.0 \times 10^6$ psi
f. 5.0% elongation
g. Borderline Ductile/Brittle
h. Magnesium
i. ASTM AZ 63A-T6

Applied Strength of Materials 6th edition Mott Solutions Manual

2-74 a. $s_y = 155$ ksi; Offset Method
b. $s_u = 170$ ksi
c. $s_p = 142$ ksi
d. $s_{el} = 149$ ksi
e. $E = 16.5 \times 10^6$ psi
f. 8% elongation
g. Ductile
h. Titanium
i. 6Al-4V

2-75 a. $s_y = 40$ ksi; Offset Method
b. $s_u = 45$ ksi
c. $s_p = 30$ ksi
d. $s_{el} = 35$ ksi
e. $E = 10.0 \times 10^6$ psi
f. 17% elongation
g. Ductile
h. Aluminum
i. 6061-T6

2-76 a. $s_y = 80$ ksi; Offset Method
b. $s_u = 90$ ksi
c. $s_p = 62$ ksi
d. $s_{el} = 71$ ksi
e. $E = 26.0 \times 10^6$ psi
f. 15% elongation
g. Ductile
h. Stainless Steel
i. SAE 430 – Full hard

2-77 a. $s_y = 80$ ksi; Offset Method
b. $s_u = 95$ ksi
c. $s_p = 55$ ksi
d. $s_{el} = 68$ ksi
e. $E = 26.0 \times 10^6$ psi
f. 2.0% elongation
g. Brittle – Does not yield
h. Malleable Iron
i. ASTM A220 Grade 80002

Applied Strength of Materials 6th edition Mott Solutions Manual


Courtesy of CRC Press/Taylor & Francis Group



Figure 2–1 **(See color insert.)** Understanding the properties of a material is critical to achieving safe and effective designs. Test equipment, such as that shown here, is available to determine the performance of a wide variety of materials with regard to strength and deformation.

002x001.tif
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

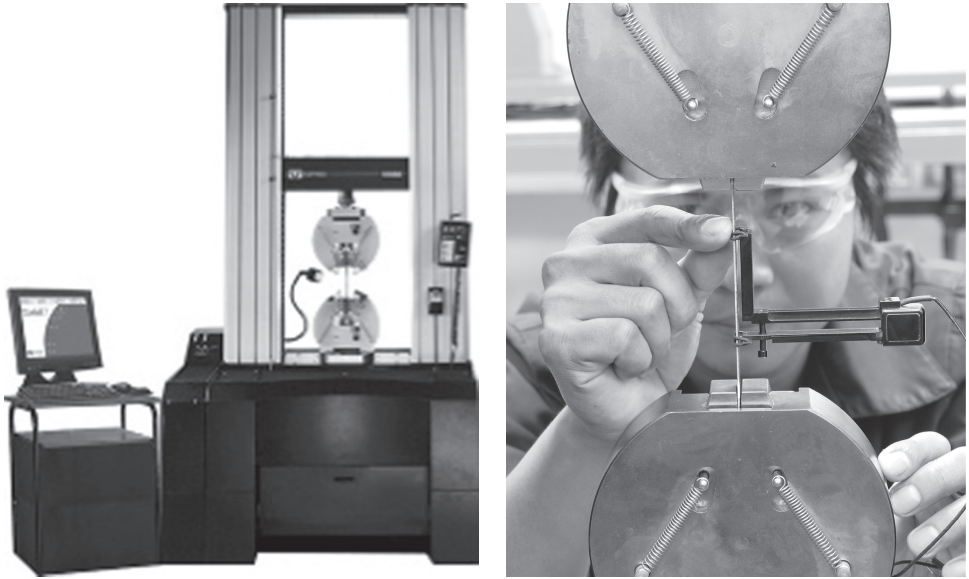

(a) *(b)*

Figure 2–2 ***(a)*** Universal testing machine for obtaining stress–strain data for materials. (Courtesy of Instron Corporation, Norwood, MA.) ***(b)*** A technician is installing a tensile test specimen in a holder that is installed in the instrument shown in part (a). The device attached to the specimen, called an *extensometer,* is used to continuously monitor elongation as the tensile load is increased during the test.

002x002.eps
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

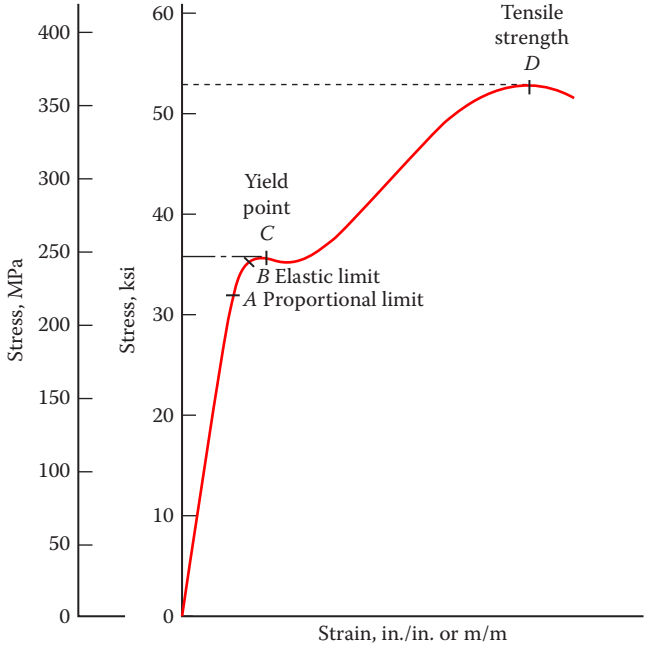


Figure 2–3 Typical stress–strain curve for steel.

002x003.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

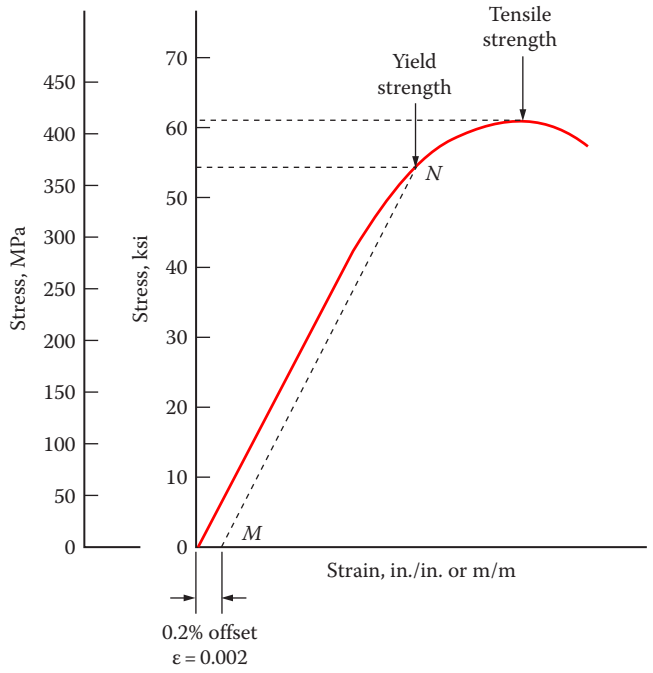


Figure 2–4 Typical stress–strain curve for aluminum.

002x004.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group


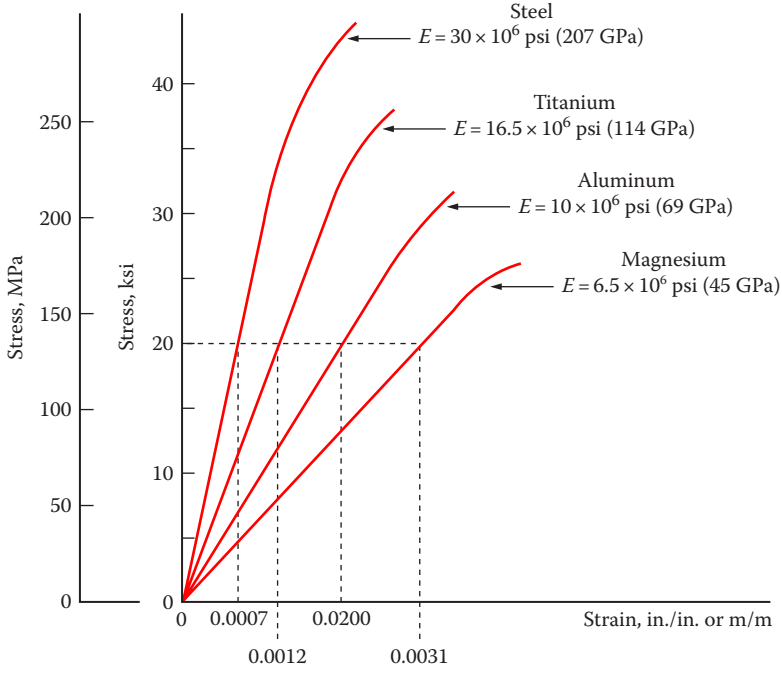


Figure 2–5 Modulus of elasticity for different metals.

002x005.eps


Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

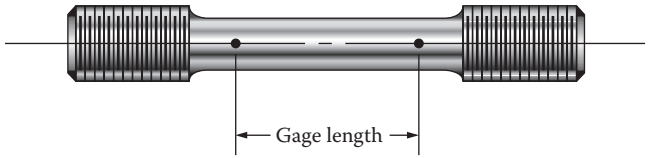

Typically 2.00 in. or 50.0 mm

(a)

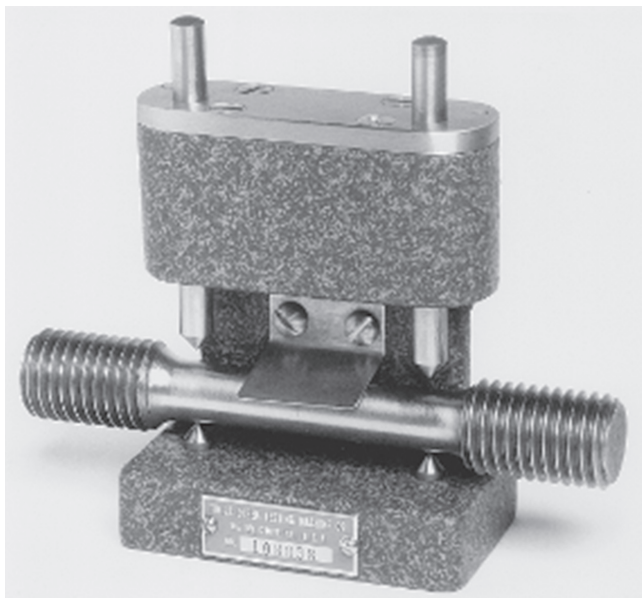

(b)

Figure 2–6 Gage length for tensile test specimen: ***(a)*** gage length marked on a test specimen and ***(b)*** test specimen in a fixture used to mark gage length. (Courtesy of Tinius Olsen Testing Machine Co., Inc., Willow Grove, PA.)

002x006.eps
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group


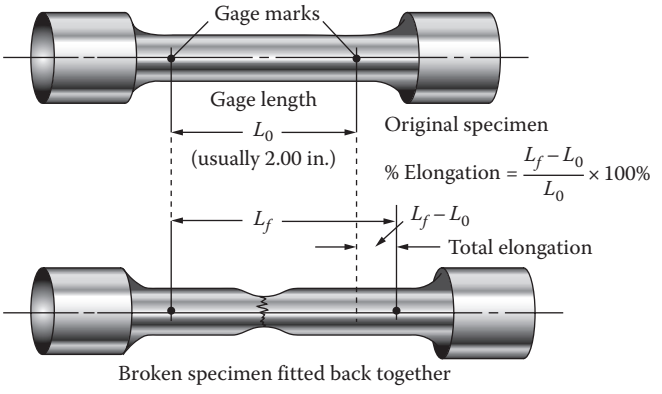


Figure 2–7 Measurement of percent elongation.

Applied Strength of Materials 6th edition Mott Solutions Manual 0926007.eml

Courtesy of CRC Press/Taylor & Francis Group

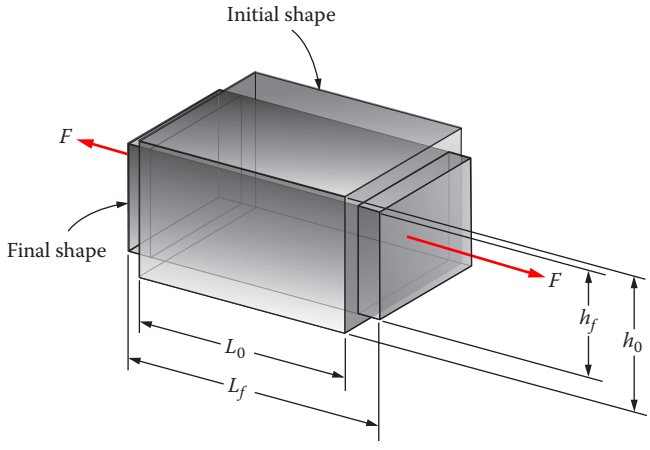

$$\text{Axial strain} = \frac{L_f - L_0}{L_0} = \varepsilon_a$$

$$\text{Lateral strain} = \frac{h_f - h_0}{h_0} = \varepsilon_L$$

$$\text{Poisson's ratio} = \frac{-\varepsilon_L}{\varepsilon_a} = \nu$$

Figure 2–8 Illustration of Poisson's ratio for an element in tension.

002x008.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

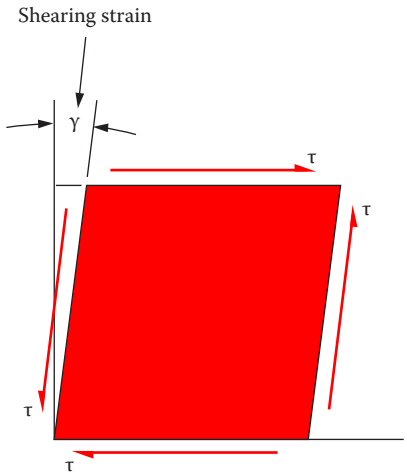


Figure 2–9 Shearing strain shown on a stress element.

002-009.eps
Applied Strength of Materials 6th Edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

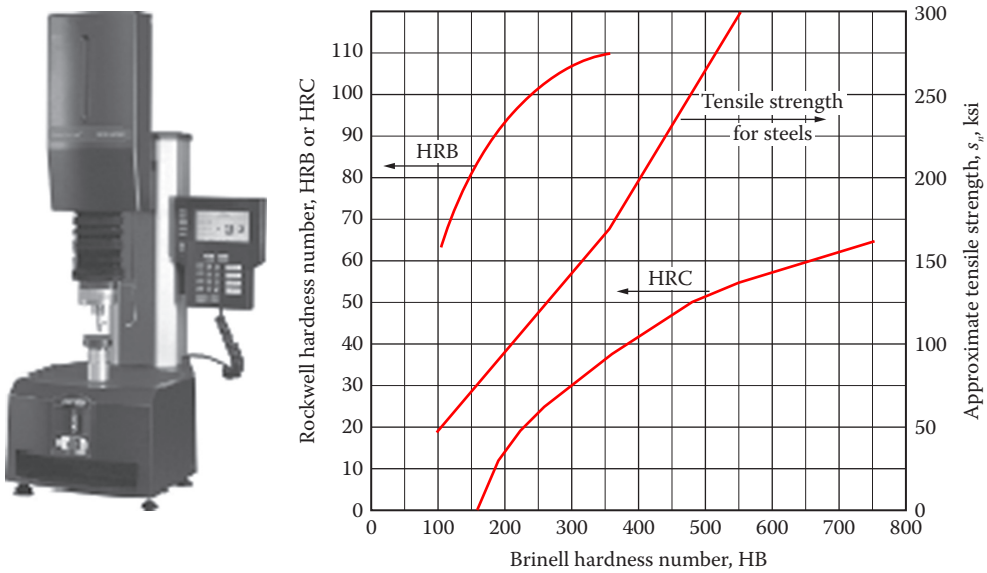


Figure 2–10 Hardness tester and conversions: ***(a)*** Rockwell hardness tester and ***(b)*** hardness conversions and relations to tensile strength for steels. (Courtesy of Instron Corporation, Norwood, MA.)

002x010.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

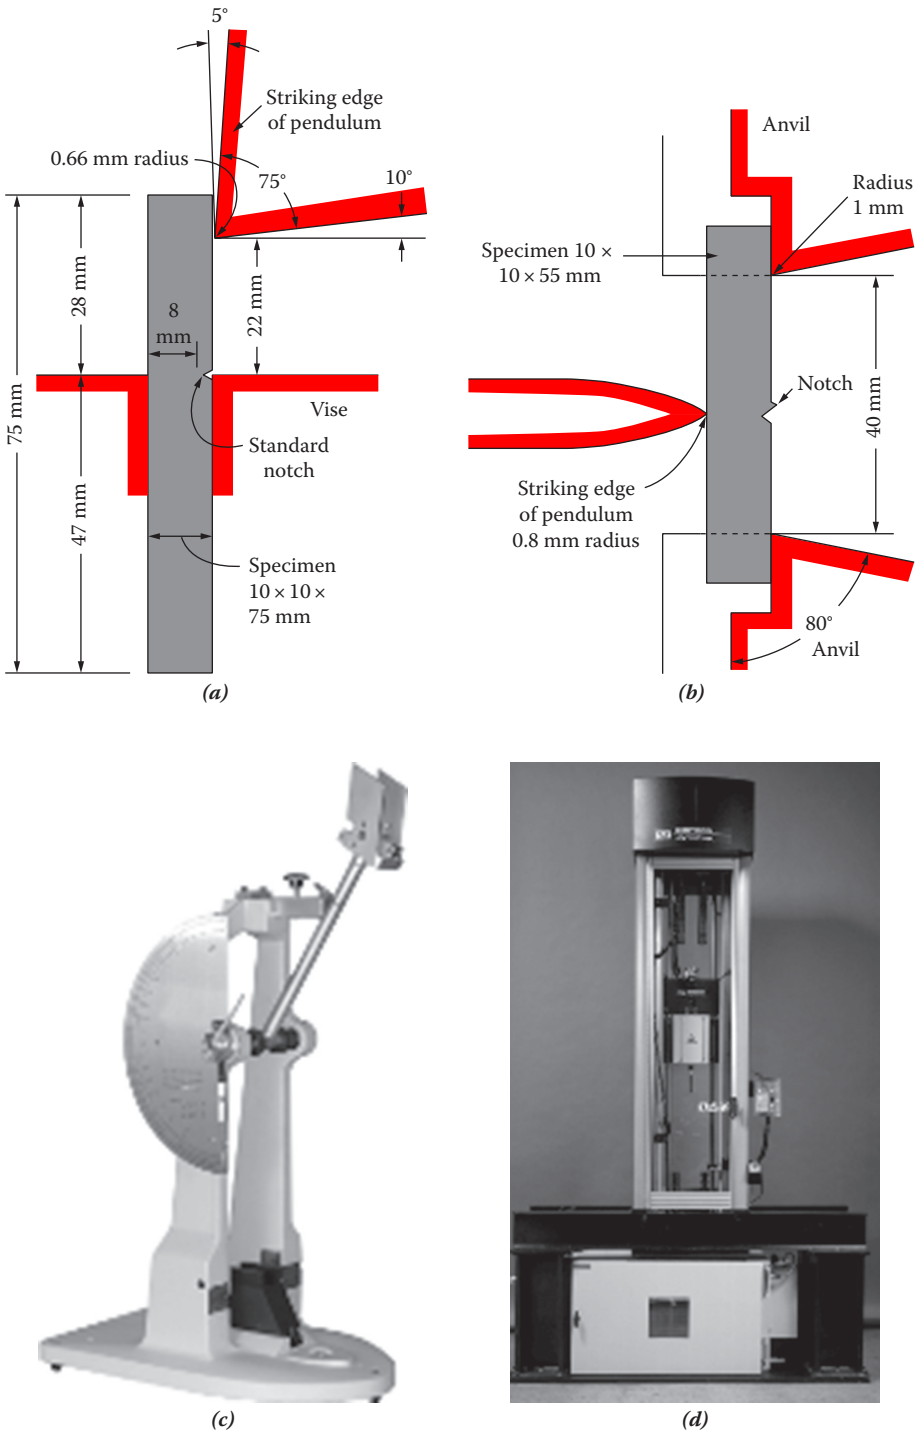


Figure 2–11 Impact testing devices and equipment: ***(a)*** Izod test specimen and striker (side view), ***(b)*** Charpy test specimen and striker (top view), ***(c)*** pendulum-type impact tester, and ***(d)*** drop-type impact tester. (Courtesy of Instron Corporation, Norwood, MA.)

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

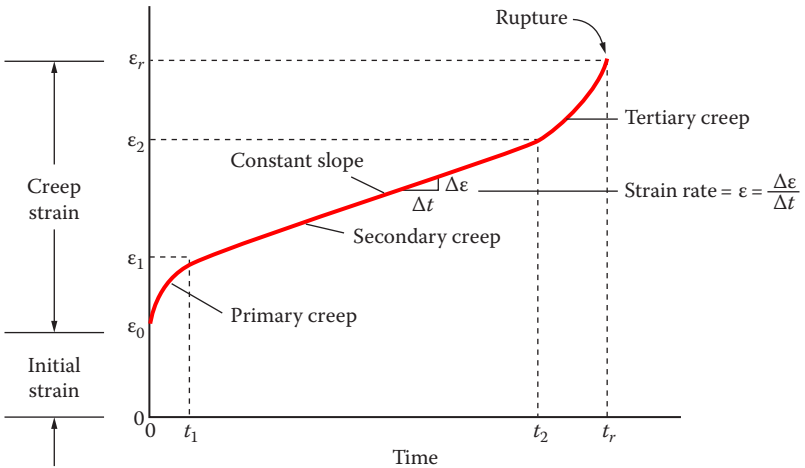


Figure 2–12 Typical creep behavior.

002-012.eps

Applied Strength of Materials 6th Edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

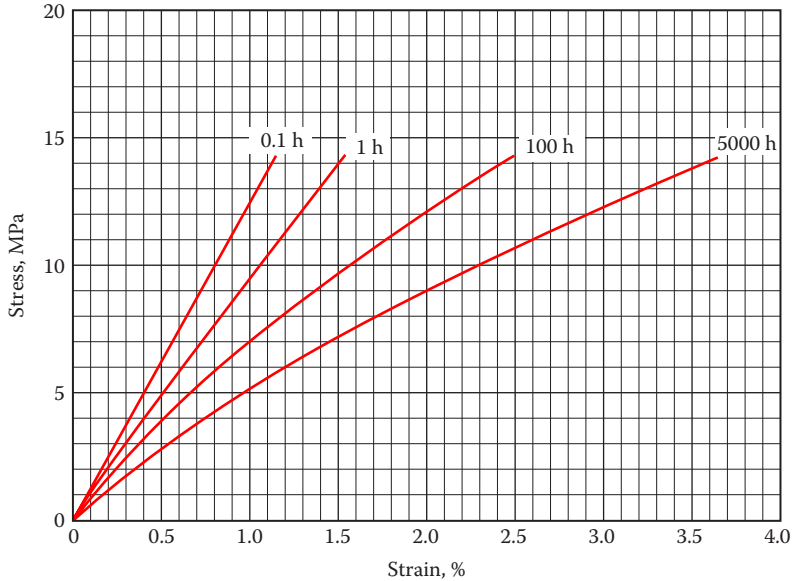


Figure 2–13 Example of stress versus strain as a function of time for nylon 66 plastic at 23°C (73°F). (Courtesy of DuPont Polymers, Wilmington, DE.)

002x013.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

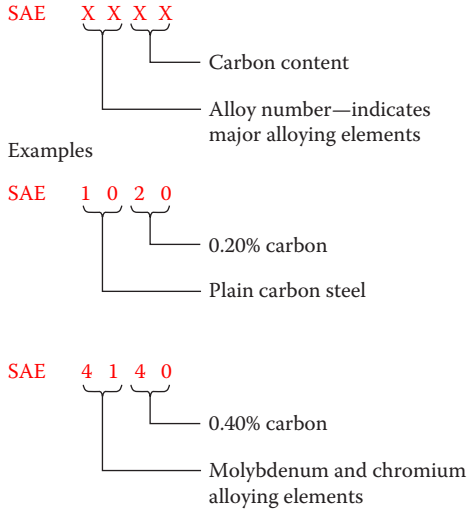


Figure 2–14 Steel designation system.

002-x014.eps
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

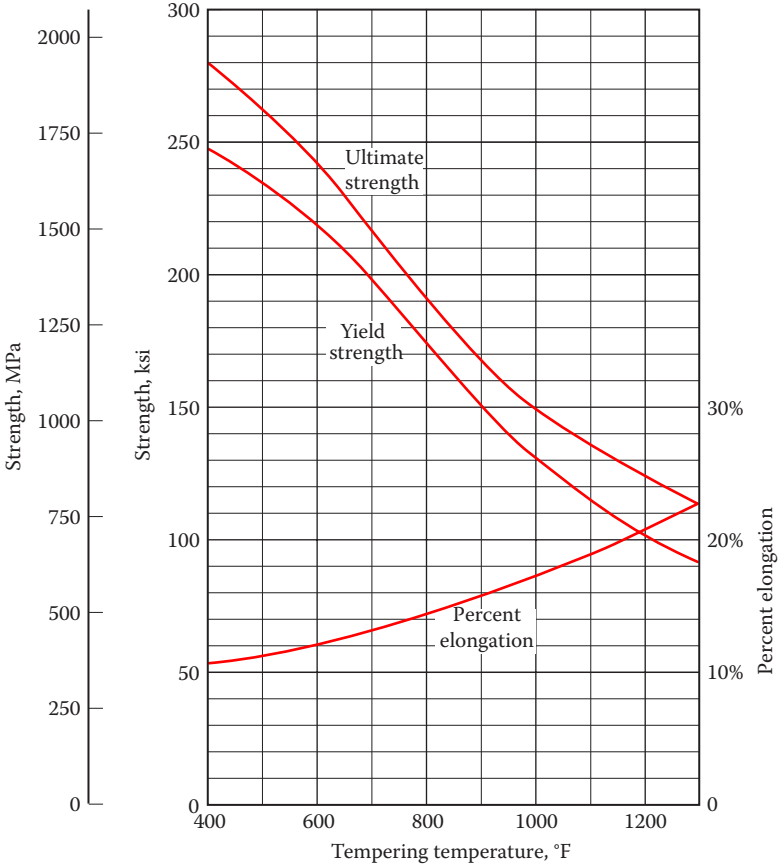


Figure 2–15 Effect of tempering temperature on the strength and ductility of an alloy steel.

002x015.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

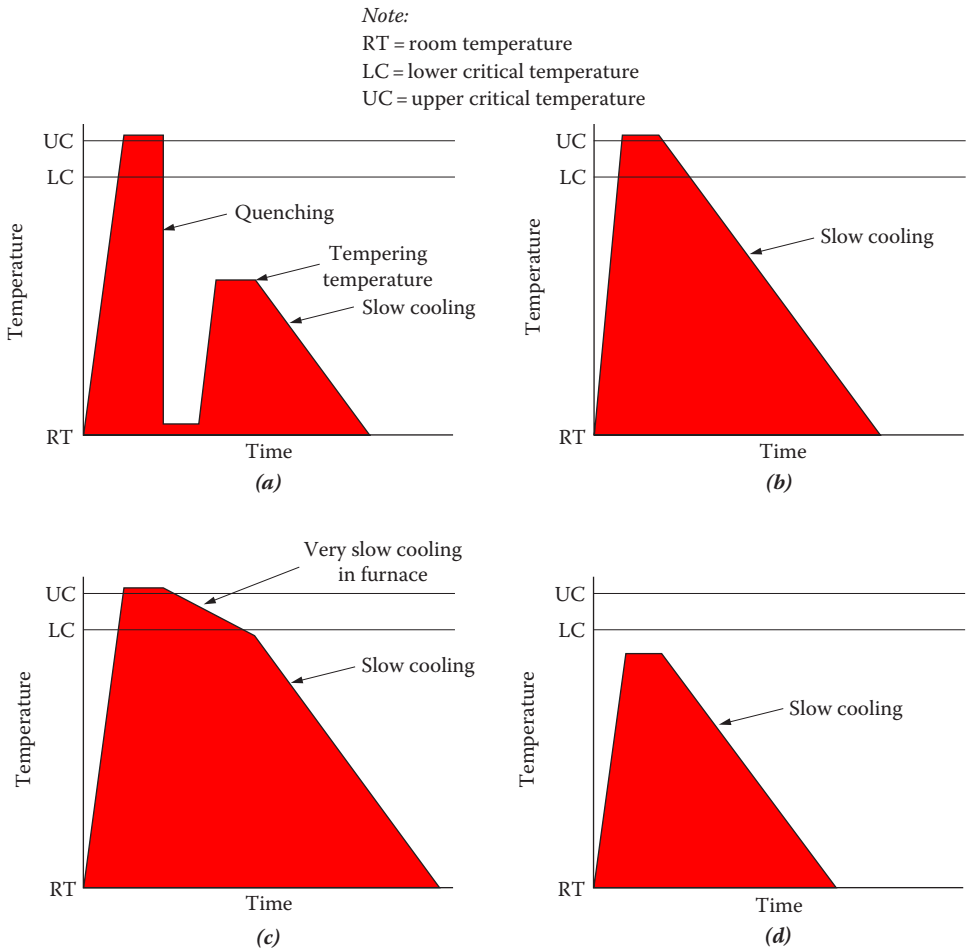


Figure 2–16 Heat treatments for steel: ***(a)*** quenching and tempering, ***(b)*** normalizing, ***(c)*** full annealing, and ***(d)*** stress-relief annealing.

002x016.eps
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

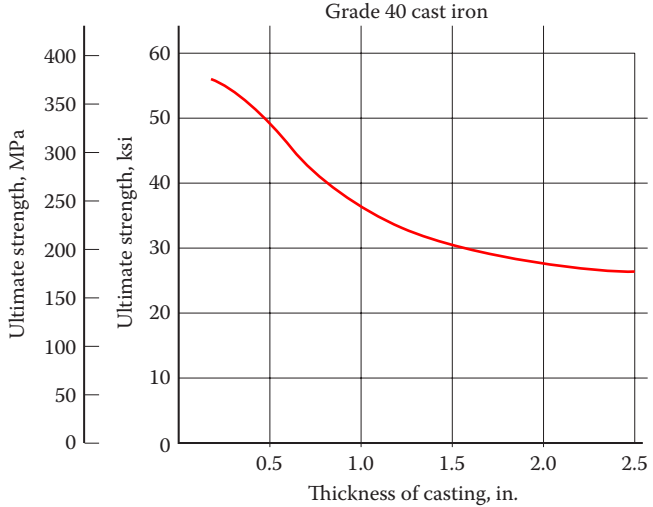


Figure 2–17 Strength versus thickness for Grade 40 gray cast iron.

002-017.eps
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

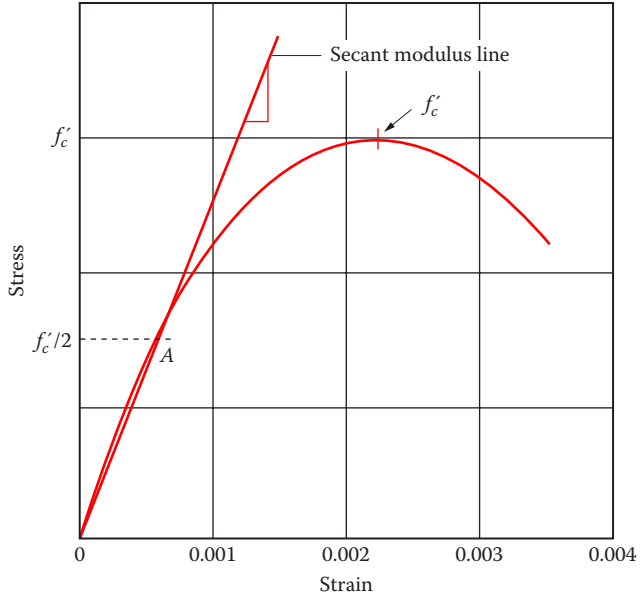


Figure 2–18 Typical stress–strain curve for concrete.

002x018.eps
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

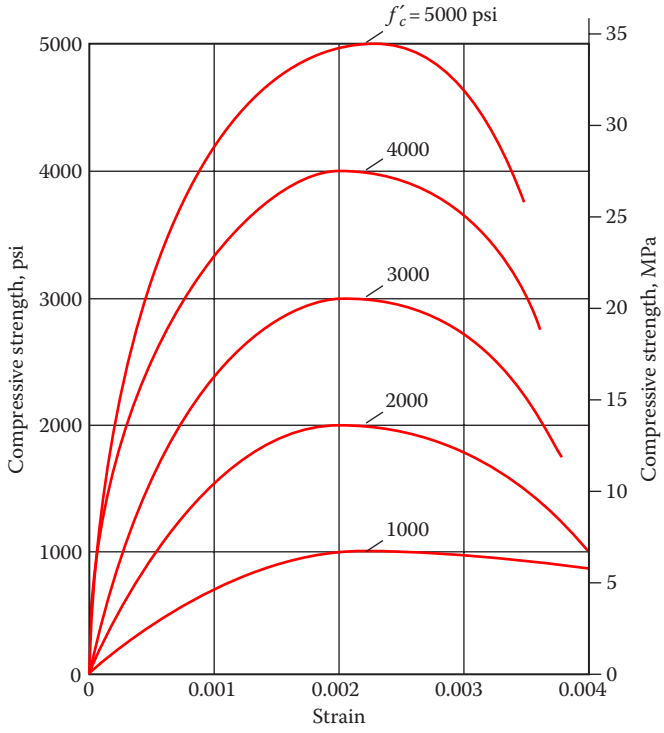


Figure 2–19 Typical stress–strain curves for a variety of concrete grades.

002x019.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group



FIGURE 2–20 Prosthetic that employs composite materials to achieve the desired performance.

002x020.eps
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group



FIGURE 2–21 High-performance bicycle employing a composite frame and other structural components.

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group



Figure 2–22 Large composite wind turbine blade at the installation site.

002x022.tif
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

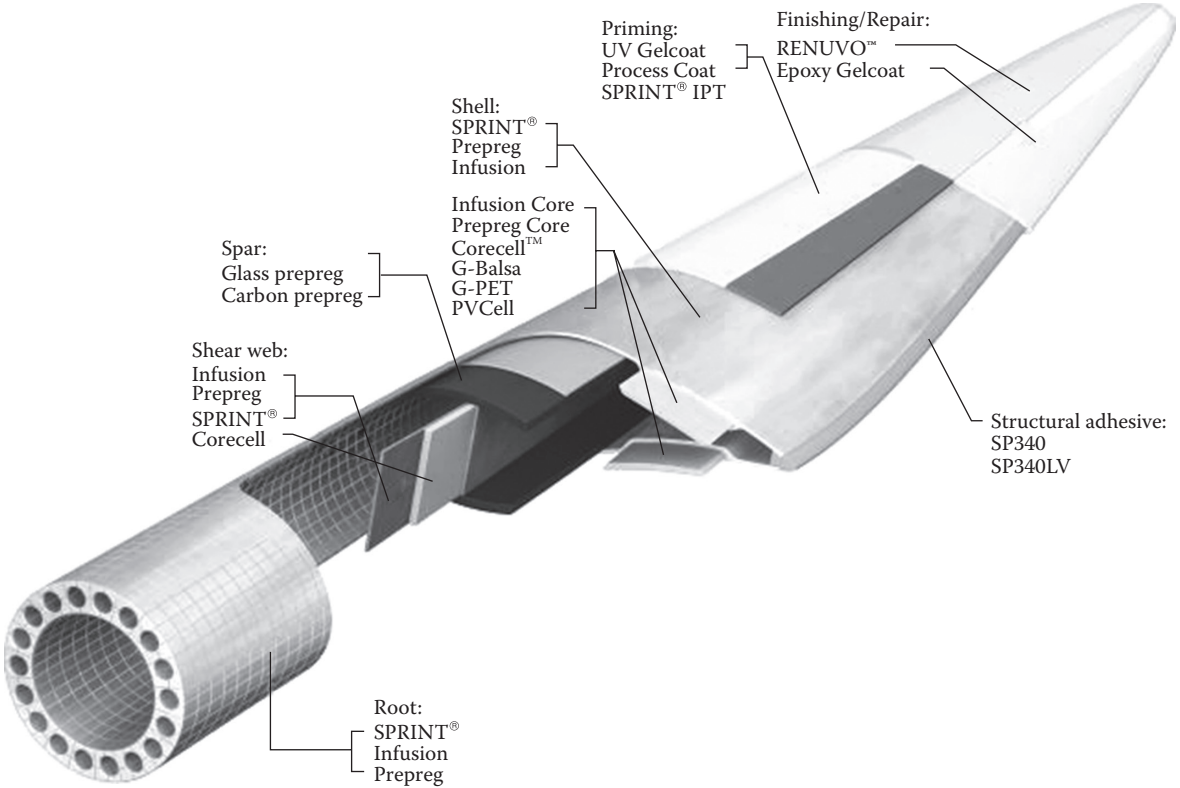


Figure 2–23 **(See color insert.)** Cut-away view of a large wind turbine blade showing the complexity and the role of composite materials in the generation of renewable energy.

002x023.eps
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

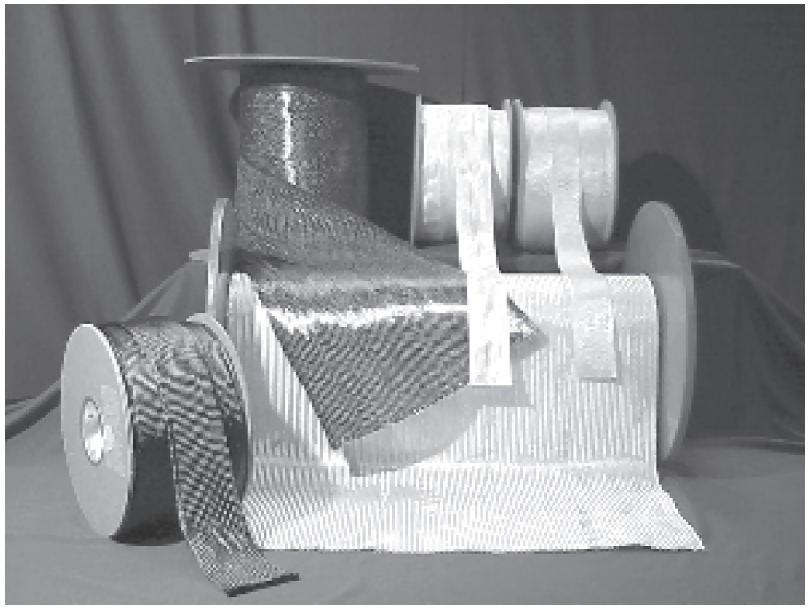


Figure 2–24 Fabrics and braided sleeves made from glass and carbon fibers used for composite materials. The products shown in Figures 2–20 through 2–23 are made with these filler materials. (Courtesy of A&P Technology, Cincinnati, OH.)

002x024.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

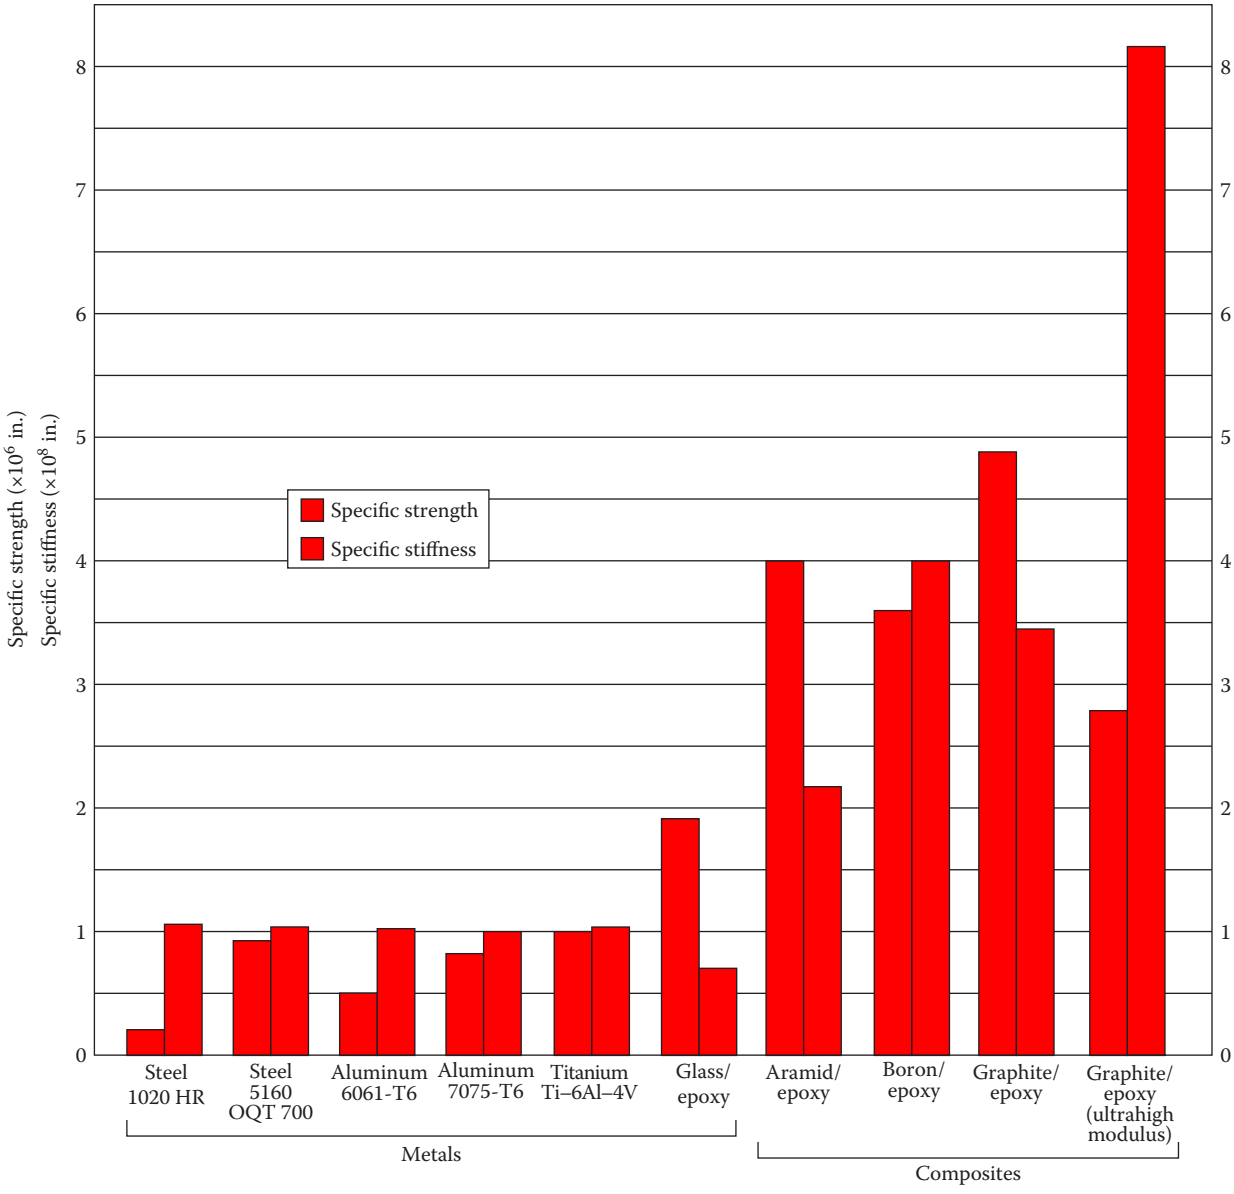


Figure 2–25 Comparison of specific strength and specific stiffness for selected materials.

002x025.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

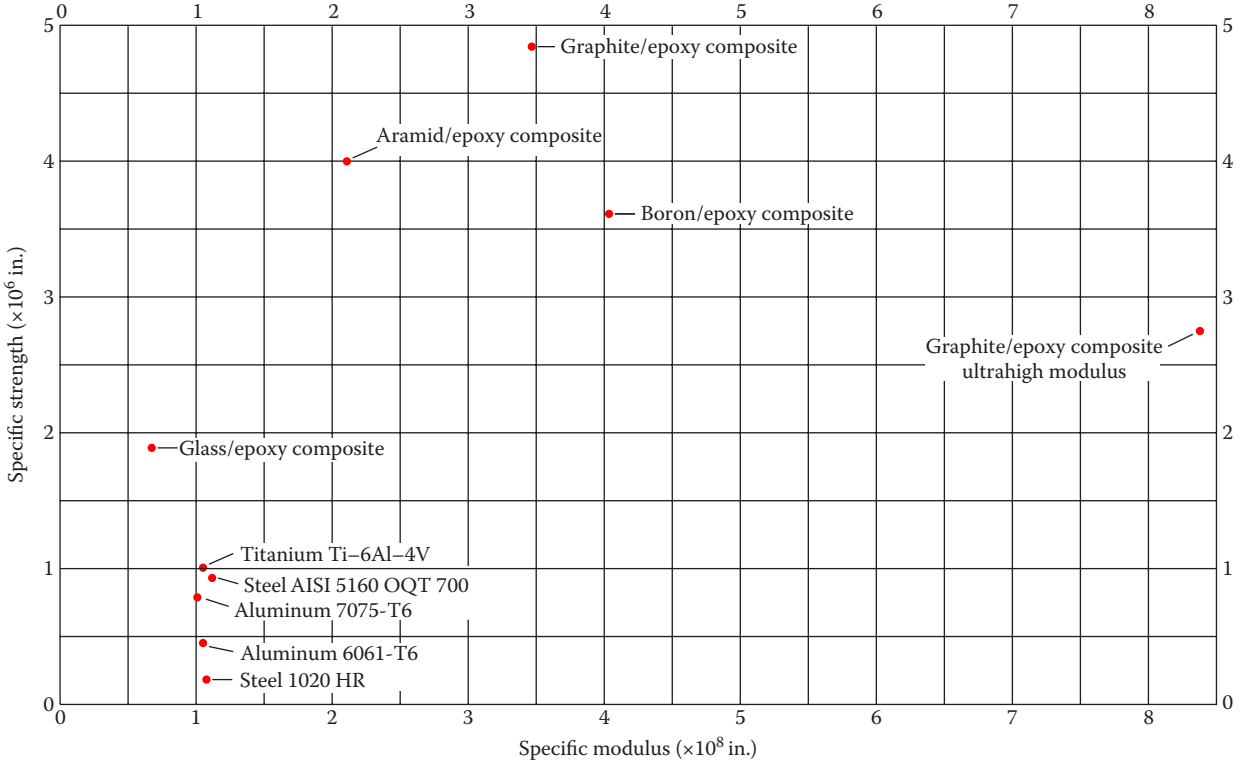


Figure 2–26 Specific strength versus specific modulus for selected metals and composites.

002x026.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

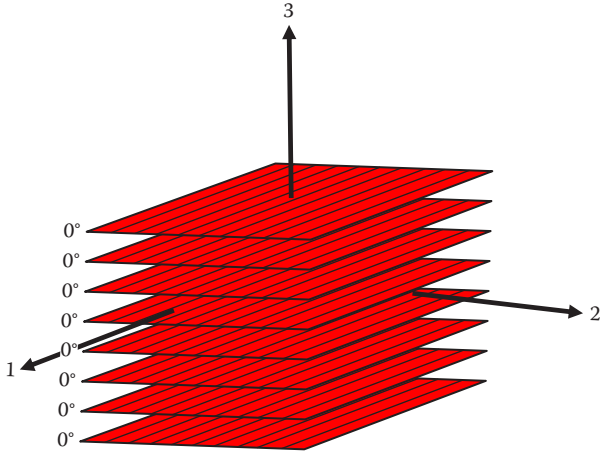


Figure 2–27 Unidirectional composite showing direction of principal axes.

002x027.eps
Applied Strength of Materials 6th Edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

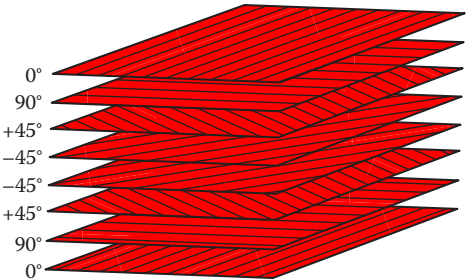


Figure 2–28 Multilayer laminated composite construction designed to produce quasi-isotropic properties.

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

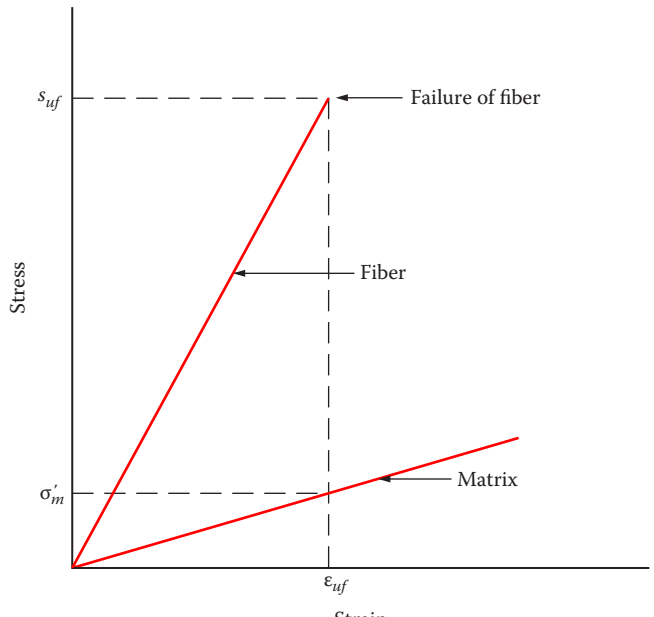


Figure 2–29 Stress versus strain for fiber and matrix materials.

002x029.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

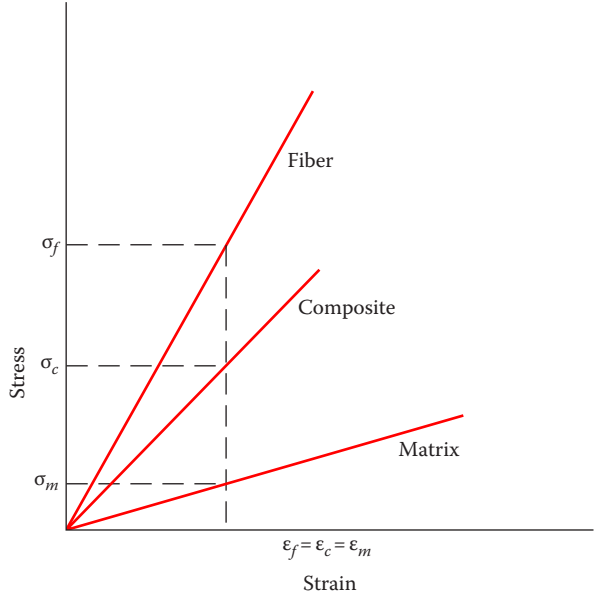


Figure 2–30 Relationship among stresses and strains for a composite and its fiber and matrix materials.

002x030.eps
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

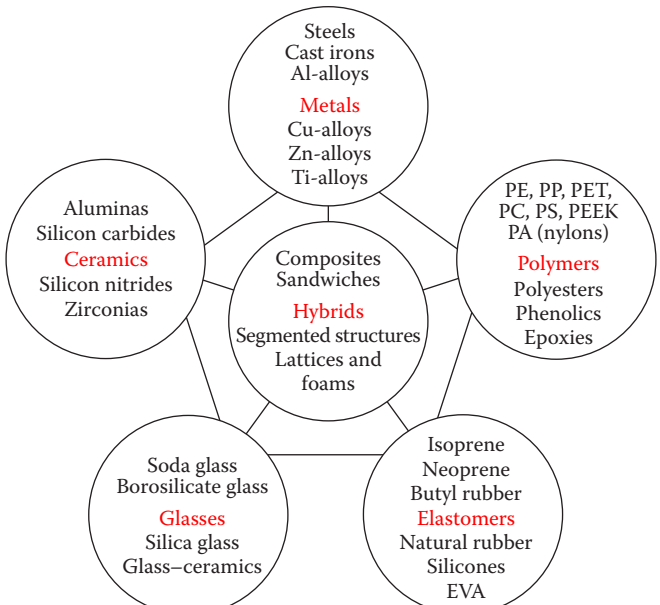


Figure 2–31 Classifications of materials. (Courtesy of Granta Design, Cambridge, U.K.)

002x031.eps
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

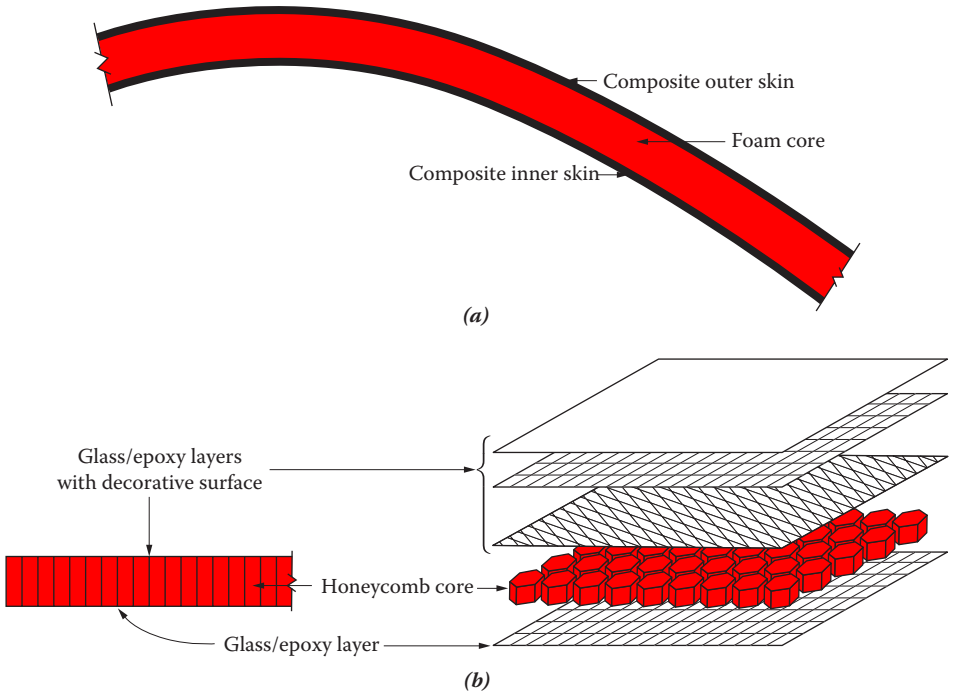


Figure 2–32 Laminated panels with lightweight cores: ***(a)*** curved panel with foam core and composite skins and ***(b)*** flat panel with honeycomb core and composite skins.

002x032.eps

Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

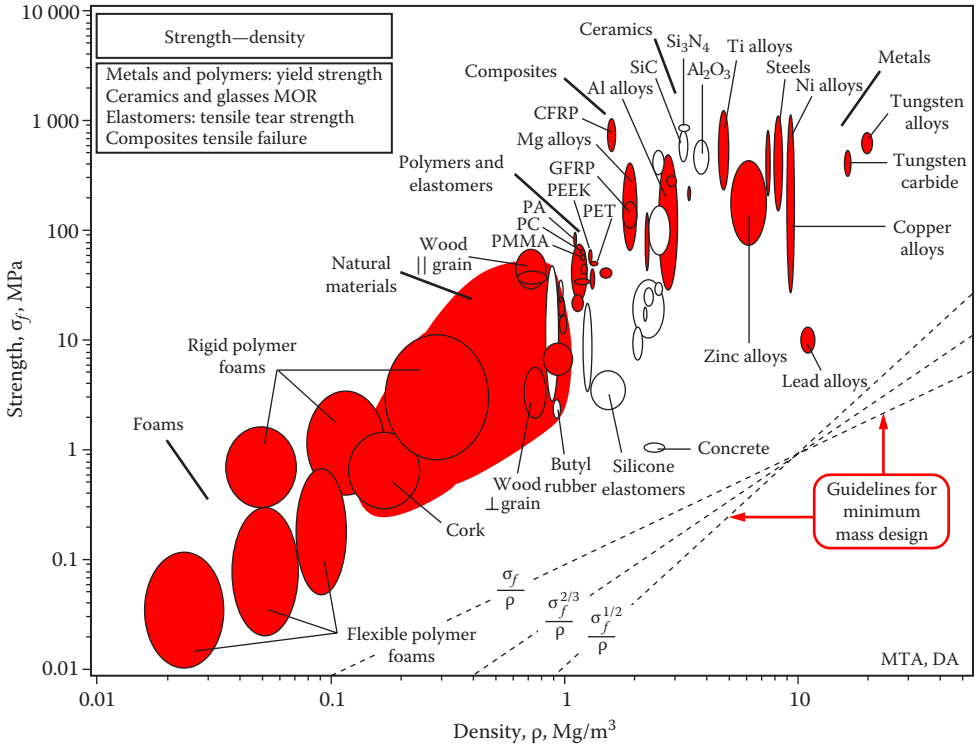


Figure 2–33 Strength versus density chart for materials selection. (Courtesy of Granta Design, Cambridge, U.K.)

002x033.eps
Applied Strength of Materials 6th edition Mott Solutions Manual

Courtesy of CRC Press/Taylor & Francis Group

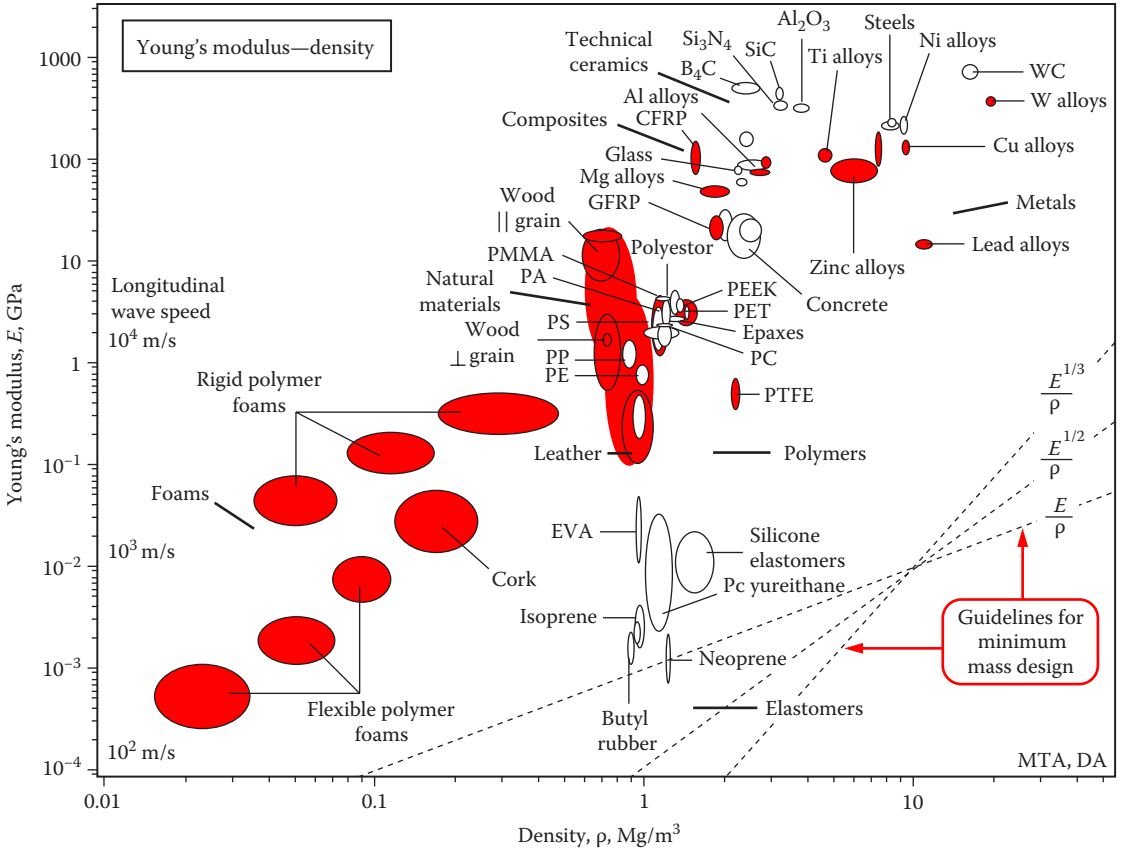


Figure 2–34 Young's modulus versus density chart for materials selection. (Courtesy of Granta Design, Cambridge, U.K.)

002x034.eps
Applied Strength of Materials 6th edition Mott Solutions Manual