Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual


SKU: 9780073132907-SOLUTIONS

Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual

CHAPTER 2


2.1

```
>> q0 = 12;R = 50;L = 5;C = 1e-4;
>> t = linspace(0,.7);
>> q = q0*exp(-R*t/(2*L)).*cos(sqrt(1/(L*C)-(R/(2*L))^2)*t);
>> plot(t,q)
```

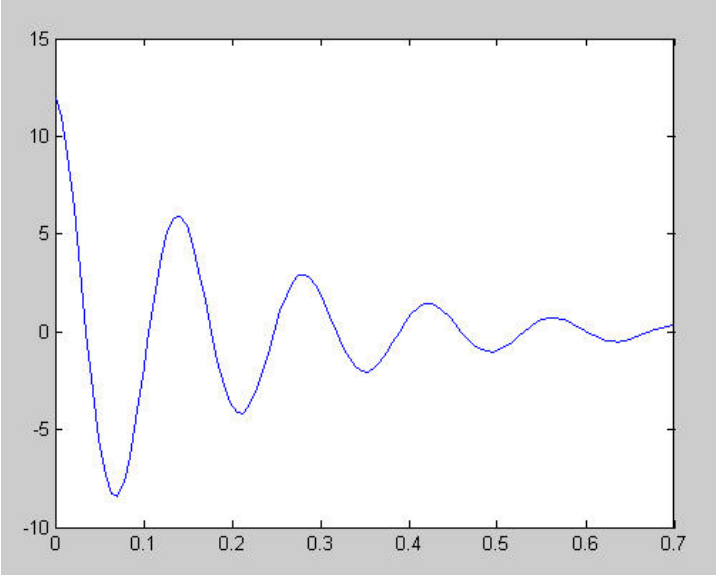

2.2

```
>> z = linspace(-4,4);
>> f = 1/sqrt(2*pi)*exp(-z.^2/2);
>> plot(z,f)
>> xlabel('z')
>> ylabel('frequency')
```

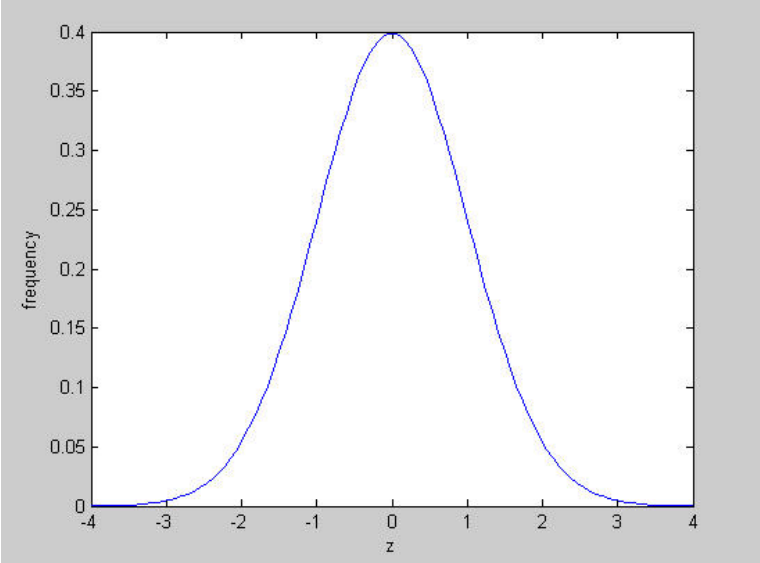

PROPRIETARY MATERIAL. © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual

2.3 (a)

```
>> t = linspace(5,29,5)

t =
     5    11    17    23    29
```

(*b*)

```
>> x = linspace(-3,4,8)

x =
    -3    -2    -1     0     1     2     3     4
```

2.4 (a)

```
>> v = -3:0.5:1

v =
   -3.0000 -2.5000 -2.0000 -1.5000 -1.0000 -0.5000  0  0.5000 1.0000
```

(b)

```
>> r = 8:-0.5:0

r =
  Columns 1 through 6
    8.0000    7.5000    7.0000    6.5000    6.0000    5.5000
  Columns 7 through 12
    5.0000    4.5000    4.0000    3.5000    3.0000    2.5000
  Columns 13 through 17
    2.0000    1.5000    1.0000    0.5000         0
```

2.5

```
>> F = [11 12 15 9 12];
>> x = [0.013 0.020 0.009 0.010 0.012];
>> k = F./x

k =
  1.0e+003 *
    0.8462    0.6000    1.6667    0.9000    1.0000

>> U = .5*k.*x.^2

U =
    0.0715    0.1200    0.0675    0.0450    0.0720

>> max(U)


ans =
    0.1200
```

2.6

```
>> TF = 32:3.6:82.4;
>> TC = 5/9*(TF-32);
>> rho = 5.5289e-8*TC.^3-8.5016e-6*TC.^2+6.5622e-5*TC+0.99987;
>> plot(TC,rho)
```

PROPRIETARY MATERIAL. © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual

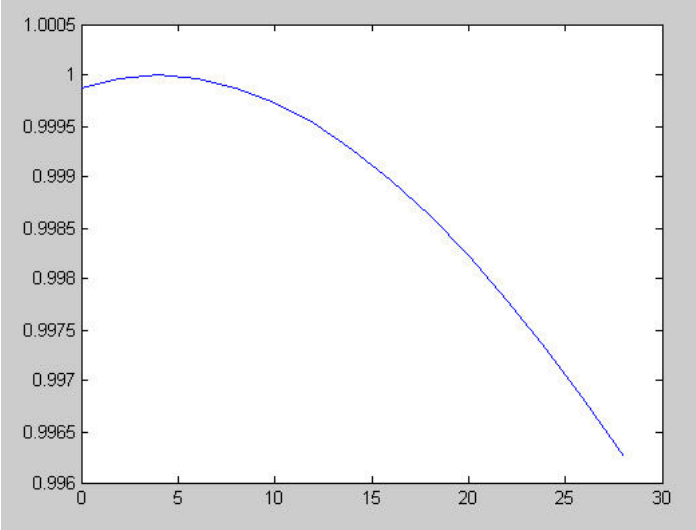

2.7

```
>> A = [.035 .0001 10 2;
0.02 0.0002 8 1;
0.015 0.001 19 1.5;
0.03 0.0008 24 3;
0.022 0.0003 15 2.5]
A =
    0.0350    0.0001   10.0000    2.0000
    0.0200    0.0002    8.0000    1.0000
    0.0150    0.0010   19.0000    1.5000
    0.0300    0.0008   24.0000    3.0000
    0.0220    0.0003   15.0000    2.5000

>> U = sqrt(A(:,2))./A(:,1).*(A(:,3).*A(:,4)./(A(:,3)+2*A(:,4))).^(2/3)


U =
    0.3624
    0.6094
    2.5053
    1.6900
    1.1971
```

2.8

```
>> t = 10:10:60;
>> c = [3.4 2.6 1.6 1.3 1.0 0.5];
>> tf = 0:75;
>> cf = 4.84*exp(-0.034*tf);
>> plot(t,c,'s',tf,cf,':')
>> xlim([0 75])
```


PROPRIETARY MATERIAL. © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual

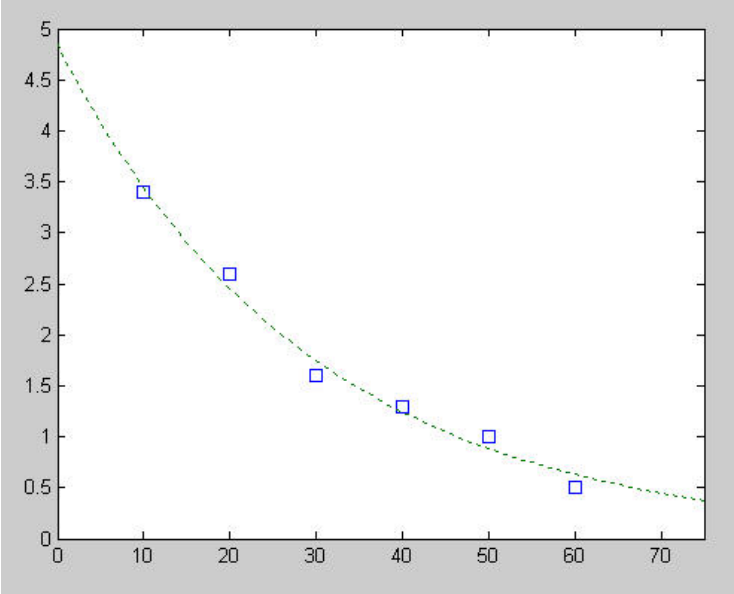

2.9

```
>> t = 10:10:60;
>> c = [3.4 2.6 1.6 1.3 1.0 0.5];
>> tf = 0:70;
>> cf = 4.84*exp(-0.034*tf);
>> semilogy(t,c,'s',tf,cf,'--')
```

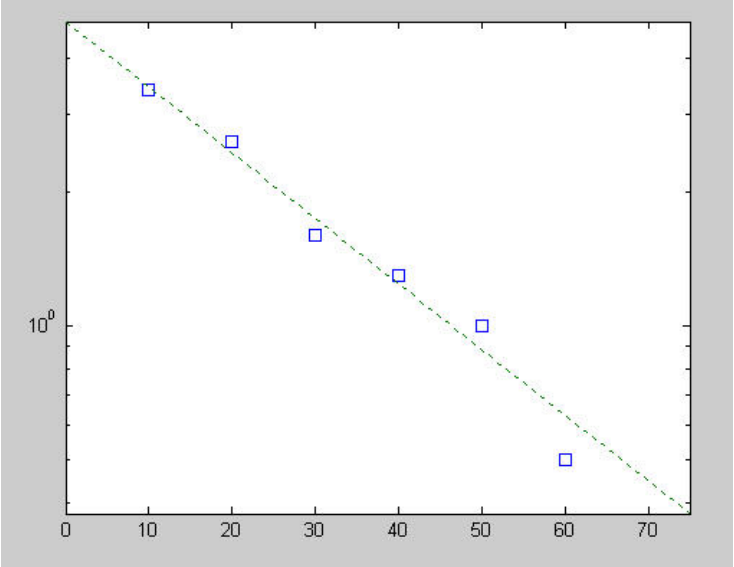

The result is a straight line. The reason for this outcome can be understood by taking the common logarithm of the function to give,

$$\log_{10} c = \log_{10} 4.84 - 0.034t \log_{10} e$$

Because $\log_{10} e = 0.4343$, this simplifies to the equation for a straight line,


PROPRIETARY MATERIAL. © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual

$$\log_{10} c = 0.6848 - 0.0148t$$

2.10

```
>> v = 10:10:80;
>> F = [25 70 380 550 610 1220 830 1450];
>> vf = 0:90;
>> Ff = 0.2741*vf.^1.9842;
>> plot(v,F,'d',vf,Ff,':')
```

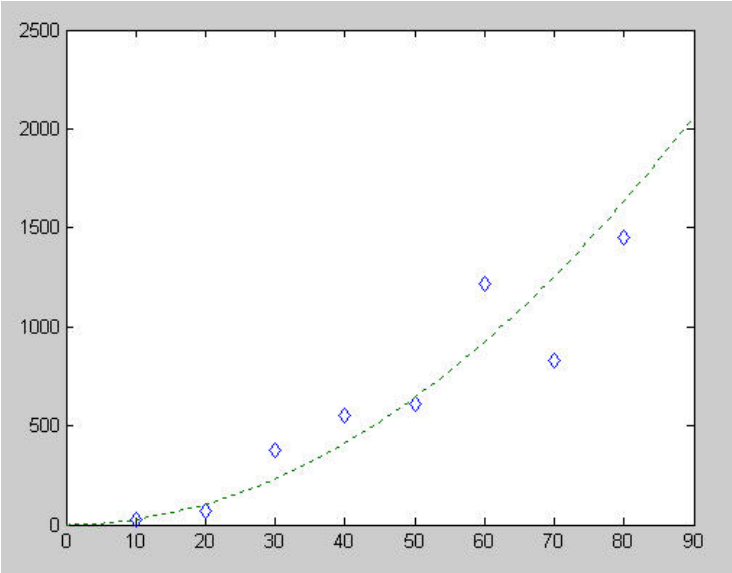


2.11

```
>> v = 10:10:80;
>> F = [25 70 380 550 610 1220 830 1450];
>> vf = 0:90;
>> Ff = 0.2741*vf.^1.9842;
>> loglog(v,F,'d',vf,Ff,':')
```


PROPRIETARY MATERIAL. © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual

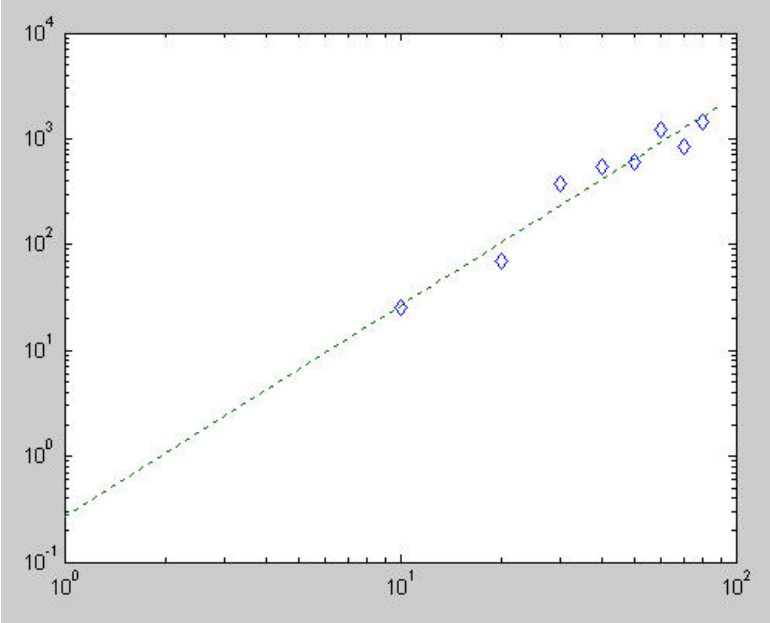

2.12

```
>> x = linspace(0,3*pi/2);
>> s = sin(x);
>> sf = x-x.^3/factorial(3)+x.^5/factorial(5)-x.^7/factorial(7);
>> plot(x,s,x,sf,'--')
```

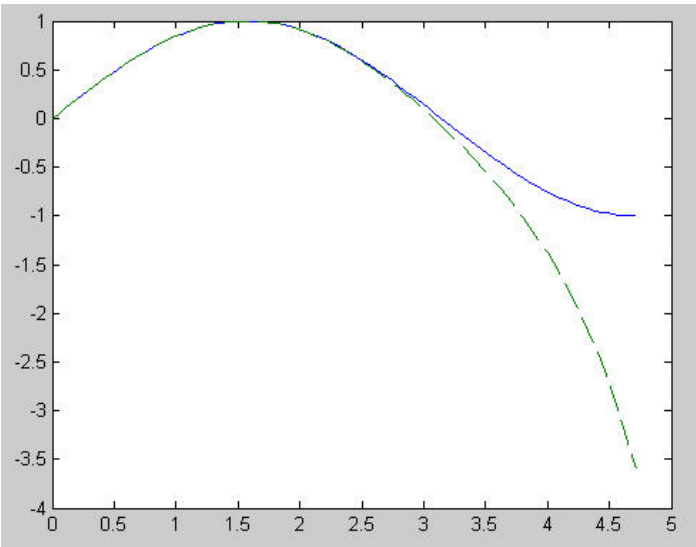

2.13 (a)

```
>> m=[83.6 60.2 72.1 91.1 92.9 65.3 80.9];
>> vt=[53.4 48.5 50.9 55.7 54 47.7 51.1];
>> g=9.81; rho=1.225;
>> A=[0.454 0.401 0.453 0.485 0.532 0.474 0.486];
>> cd=g*m./vt.^2;
>> CD=2*cd/rho./A
```

PROPRIETARY MATERIAL. © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual

```
CD =
    1.0343    1.0222    0.9839    0.9697    0.9591    0.9698    1.0210
```

(b)

```
>> CDavg=mean(CD),CDmin=min(CD),CDmax=max(CD)


CDavg =
    0.9943

CDmin =
    0.9591

CDmax =
    1.0343
```

(b)

```
>> subplot(1,2,1);plot(m,A,'o')
>> xlabel('mass (kg)');ylabel('area (m^2)')
>> title('area versus mass')
>> subplot(1,2,2);plot(m,CD,'o')
>> xlabel('mass (kg)');ylabel('CD')
>> title('dimensionless drag versus mass')
```

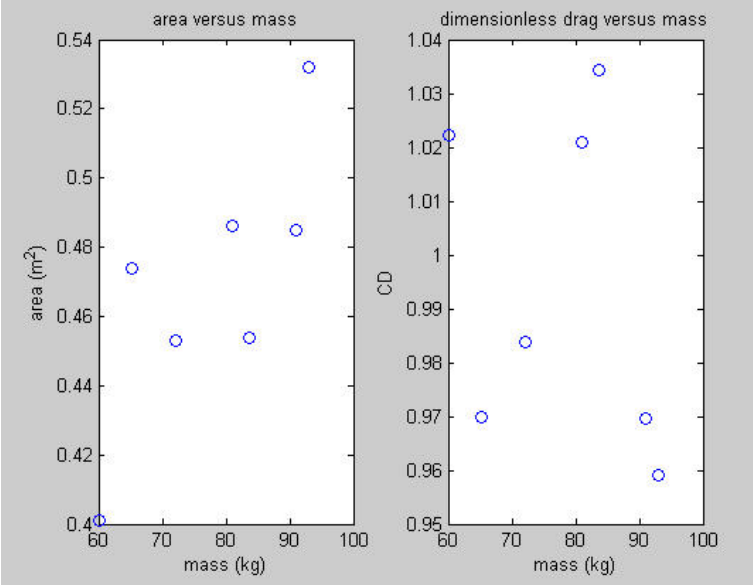


2.14 (a)

```
t = 0:pi/50:10*pi;
subplot(2,1,1);plot(exp(-0.1*t).*sin(t),exp(-0.1*t).*cos(t))
title('(a)')
subplot(2,1,2);plot3(exp(-0.1*t).*sin(t),exp(-0.1*t).*cos(t),t);
title('(b)')
```

PROPRIETARY MATERIAL. © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual

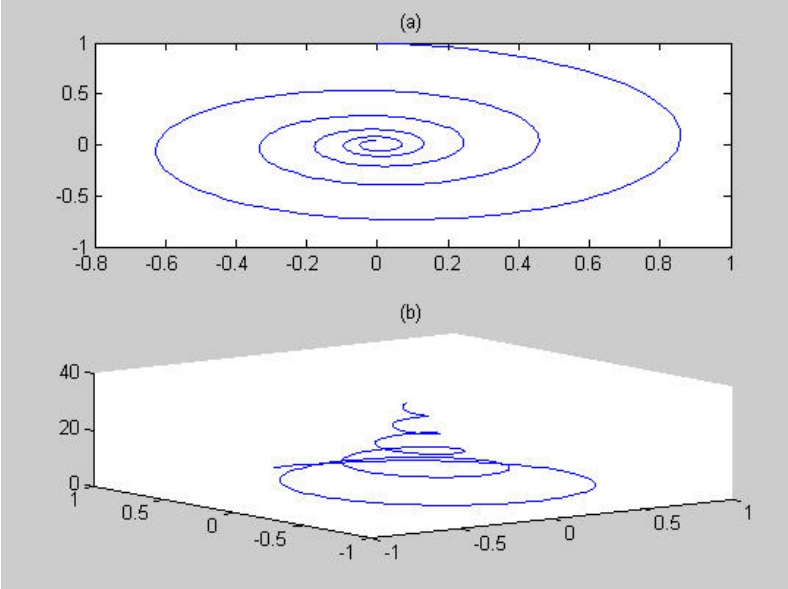

2.15 (a)

```
>> x = 2;
>> x ^ 3;
>> y = 8 - x

y =
     6
```

(b)

```
>> q = 4:2:10;
>> r = [7 8 4; 3 6 -2];
>> sum(q) * r(2, 3)


ans =
   -56
```

2.16

```
>> y0=0;v0=30;g=9.81;
>> x=0:5:100;
>> theta0=15*pi/180;
>> y1=tan(theta0)*x-g/(2*v0^2*cos(theta0)^2)*x.^2+y0;
>> theta0=30*pi/180;
>> y2=tan(theta0)*x-g/(2*v0^2*cos(theta0)^2)*x.^2+y0;
>> theta0=45*pi/180;
>> y3=tan(theta0)*x-g/(2*v0^2*cos(theta0)^2)*x.^2+y0;
>> theta0=60*pi/180;
>> y4=tan(theta0)*x-g/(2*v0^2*cos(theta0)^2)*x.^2+y0;
>> theta0=75*pi/180;
>> y5=tan(theta0)*x-g/(2*v0^2*cos(theta0)^2)*x.^2+y0;
>> y=[y1' y2' y3' y4' y5']
>> plot(x,y)
>> axis([0 100 0 50])
>> legend('15','30','45','60','75')
```

PROPRIETARY MATERIAL. © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual

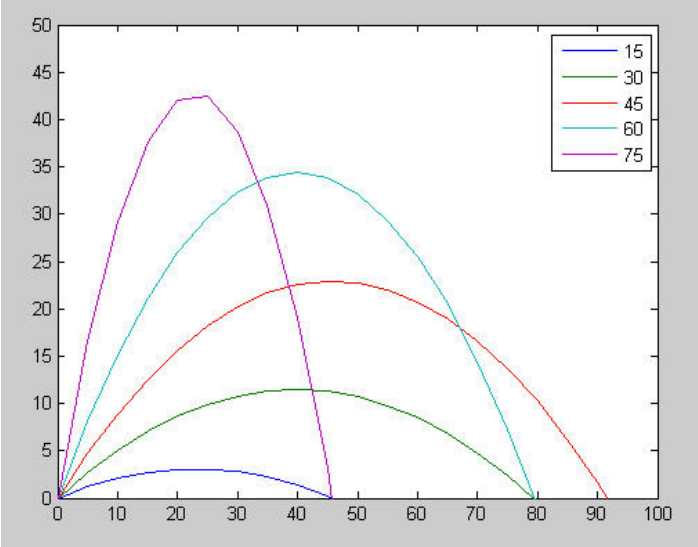


2.17

```
>> R=8.314;E=1e5;A=7E16;
>> Ta=273:5:333;
>> k=A*exp(-E./(R*Ta))

k =
  Columns 1 through 10
    0.0051    0.0113    0.0244    0.0510    0.1040    0.2070    0.4030
0.7677    1.4326    2.6213
  Columns 11 through 13
    4.7076    8.3048   14.4030

>> subplot(1,2,1);plot(Ta,k)
>> subplot(1,2,2);semilogy(1./Ta,k)
```

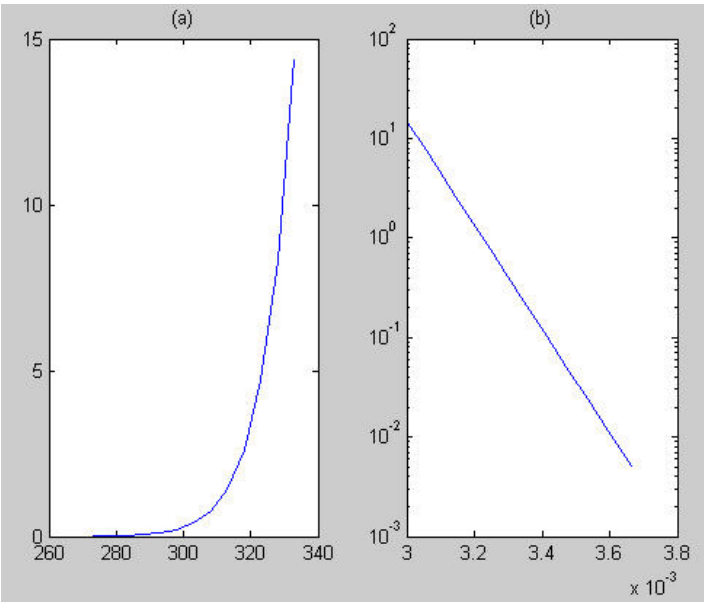

PROPRIETARY MATERIAL. © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual

The result in (b) is a straight line. The reason for this outcome can be understood by taking the common logarithm of the function to give,

$$\log_{10} k = \log_{10} A - \left(\frac{E}{R}\log_{10} e\right)\frac{1}{T_a}$$

Thus, a plot of $\log_{10}k$ versus $1/T_a$ is linear with a slope of $-(E/R)\log_{10}e = -5.2237\times10^3$ and an intercept of $\log_{10}A = 16.8451$.

PROPRIETARY MATERIAL. © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Applied Numerical Methods with MATLAB for Engineers and Scientists 2nd edition Steven Chapra Solutions Manual