Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

SKU: 9780135426234-SOLUTIONS

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

12–1.

A baseball is thrown downward from a 50-ft tower with an initial speed of 18 ft/s. Determine the speed at which it hits the ground and the time of travel.

SOLUTION

$(+\downarrow)$ $v_2^2 = v_1^2 + 2a_c(s_2 - s_1)$

$v_2^2 = (18)^2 + 2(32.2)(50 - 0)$

$v_2 = 59.532 = 59.5 \text{ ft/s} \downarrow$ **Ans.**

$(+\downarrow)$ $v_2 = v_1 + a_c t$

$59.532 = 18 + 32.2(t)$

$t = 1.29 \text{ s}$ **Ans.**

Ans:

$v_2 = 59.5 \text{ ft/s}$
$t = 1.29 \text{ s}$

Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

12–2.

Starting from rest, a particle moving in a straight line has an acceleration of $a = (2t - 6)\ \text{m/s}^2$, where t is in seconds. What is the particle's velocity when $t = 6$ s, and what is its position when $t = 11$ s?

SOLUTION

$a = 2t - 6$

$dv = a\,dt$

$$\int_0^v dv = \int_0^t (2t - 6)\,dt$$

$v = t^2 - 6t$

$ds = v\,dt$

$$\int_0^s ds = \int_0^t (t^2 - 6t)\,dt$$

$$s = \frac{t^3}{3} - 3t^2$$

When $t = 6$ s,

$v = 0$ **Ans.**

When $t = 11$ s,

$s = 80.7$ m **Ans.**

Ans:
$v = 0$
$s = 80.7$ m

Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

12–3.

From approximately what floor of a building must a car be dropped from an at-rest position so that it reaches a speed of 80.7 ft/s (55 mi/h) when it hits the ground? Each floor is 12 ft higher than the one below it. (*Note*: You may want to remember this when traveling 55 mi/h.)

SOLUTION

$(+\downarrow)$ $\quad v^2 = v_0^2 + 2a_c(s - s_0)$

$$80.7^2 = 0 + 2(32.2)(s - 0)$$

$$s = 101.13 \text{ ft}$$

$$\#\text{ of floors} = \frac{101.13}{12} = 8.43$$

The car must be dropped from the 9th floor. **Ans.**

Ans:
$n = 9$

Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***12–4.**

A car is traveling at 15 m/s when the traffic light 50 m ahead turns yellow. Determine the required constant deceleration of the car and the time needed to stop the car at the light.

SOLUTION

Kinematics:

$v_0 = 0, s_0 = 0, s = 50$ m and $v_0 = 15$ m/s.

$(\pm\rightarrow)$ $\quad v^2 = {v_0}^2 + 2a_c(s - s_0)$

$0 = 15^2 + 2a_c(50 - 0)$

$a_c = -2.25 \text{ m/s}^2 = 2.25 \text{ m/s}^2 \leftarrow$ **Ans.**

$(\pm\rightarrow)$ $\quad v = v_0 + a_c t$

$0 = 15 + (-2.25)t$

$t = 6.67$ s **Ans.**

Ans:
$a_c = -2.25 \text{ m/s}^2$
$t = 6.67$ s


Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

12–5.

The velocity of a particle traveling in a straight line is given by $v = (6t - 3t^2)$ m/s, where t is in seconds. If $s = 0$ when $t = 0$, determine the particle's deceleration and position when $t = 3$ s. How far has the particle traveled during the 3-s time interval, and what is its average speed?

SOLUTION

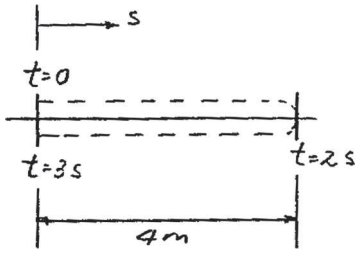

$$\frac{ds}{dt} = v$$

$$ds = (6t - 3t^2)\,dt$$

$$\int_0^s ds = \int_0^t (6t - 3t^2)dt$$

$$s = 3t^2 - t^3$$

At $t = 3$ s, $s = 3(3)^2 - 3^3 = 0$ **Ans.**

When $v = 0$; $0 = 6t - 3t^2 \quad t = 0$ and 2 s

At $t = 2$ s, $s = 3(2)^2 - 2^3 = 4$ m

From the figure $s_T = 2(4) = 8$ m **Ans.**

$$(v_{avg})_{sp} = \frac{s_T}{\Delta t} = \frac{8}{3} = 2.67 \text{ m/s}$$ **Ans.**

$$a = \frac{dv}{dt} = 6 - 6t$$

At $t = 3$ s, $a = 6 - 6(3) = -12 \text{ m/s}^2$ **Ans.**

Ans:

$s = 0$
$s_T = 8$ m
$(v_{avg})_{sp} = 2.67$ m/s
$a = -12 \text{ m/s}^2$

Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

12–6.

A particle moves along a straight line with a velocity $v = (200s)$ mm/s, where s is in millimeters. Determine the acceleration of the particle at $s = 2000$ mm. How long does the particle take to reach this position if $s = 500$ mm when $t = 0$?

SOLUTION

Acceleration:

$$\left(\pm\right) \qquad \frac{dv}{ds} = 200$$

$$\text{Thus, } a = v\frac{dv}{ds} = (200s)(200) = \left\{40\left(10^3\right)s\right\} \text{ mm/s}^2$$

When $s = 2000$ mm,

$$a = 40\left(10^3\right)(2000) = 80\left(10^6\right) \text{ mm/s}^2 = 80 \text{ km/s}^2 \rightarrow \qquad \textbf{Ans.}$$

Position:

$$\left(\pm\right) \qquad dt = \frac{ds}{v}$$

$$\int_0^t dt = \int_{500\text{ mm}}^{s} \frac{ds}{200s}$$

$$t\Big|_0^t = \frac{1}{200}\ln s\Big|_{500\text{ mm}}^{s}$$

$$t = \frac{1}{200}\ln\frac{s}{500}$$

At $s = 2000$ mm,

$$t = \frac{1}{200}\ln\frac{2000}{500} = 6.93\left(10^{-3}\right) \text{ s} = 6.93 \text{ ms} \qquad \textbf{Ans.}$$

Ans:
$a = 80 \text{ km/s}^2$
$t = 6.93 \text{ ms}$

Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

12–7.

A car has an initial speed of 25 m/s and a constant deceleration of 3 m/s^2. Determine the velocity of the car when $t = 4$ s. What is the displacement of the car during the 4-s time interval? How much time is needed to stop the car?

SOLUTION

$v = v_0 + a_c t$

$v = 25 + (-3)(4) = 13 \text{ m/s}$ **Ans.**

$\Delta s = s - s_0 = v_0 t + \frac{1}{2} a_c t^2$

$\Delta s = s - 0 = 25(4) + \frac{1}{2}(-3)(4)^2 = 76 \text{ m}$ **Ans.**

$v = v_0 + a_c t$

$0 = 25 + (-3)(t)$

$t = 8.33 \text{ s}$ **Ans.**

Ans:
$v = 13 \text{ m/s}$
$\Delta s = 76 \text{ m}$
$t = 8.33 \text{ s}$

Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***12–8.**

A particle is moving along a straight line such that its position is defined by $s = (10t^2 + 20)$ mm, where t is in seconds. Determine (a) the displacement of the particle during the time interval from $t = 1$ s to $t = 5$ s, (b) the average velocity of the particle during this time interval, and (c) the acceleration when $t = 1$ s.

SOLUTION

$s = 10t^2 + 20$

(a) $s|_{1\,s} = 10(1)^2 + 20 = 30$ mm

$s|_{5\,s} = 10(5)^2 + 20 = 270$ mm

$\Delta s = 270 - 30 = 240$ mm **Ans.**

(b) $\Delta t = 5 - 1 = 4$ s

$v_{avg} = \dfrac{\Delta s}{\Delta t} = \dfrac{240}{4} = 60$ mm/s **Ans.**

(c) $a = \dfrac{d^2s}{dt^2} = 20$ mm/s^2 (for all t) **Ans.**

Ans:
(a) $\Delta s = 240$ mm
(b) $v_{avg} = 60$ mm/s
(c) $a = 20$ mm/s^2

Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

12–9.

A particle moves along a straight path with an acceleration of $a = (5/s)\ \text{m/s}^2$, where s is in meters. Determine the particle's velocity when $s = 2\ \text{m}$, if it is released from rest when $s = 1\ \text{m}$.

SOLUTION

$$a\,ds = v\,dv$$

$$\frac{5}{s}\,ds = v\,dv$$

$$5\int_1^2 \frac{ds}{s} = \int_0^v v\,dv$$

$$5\,(\ln s)\Big|_1^2 = \frac{v^2}{2}$$

$$v = 2.63\ \text{m/s} \qquad \textbf{Ans.}$$

Ans:
$v = 2.63\ \text{m/s}$

Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

12–10.

A particle moves along a straight line with an acceleration of $a = 5/(3s^{1/3} + s^{5/2})$ ft/s^2, where s is in feet. Determine the particle's velocity when $s = 2$ ft, if it starts from rest when $s = 1$ ft. Use a numerical method to evaluate the integral.

SOLUTION

$$a = \frac{5}{\left(3s^{\frac{1}{3}} + s^{\frac{5}{2}}\right)}$$

$$a\,ds = v\,dv$$

$$\int_1^2 \frac{5\,ds}{\left(3s^{\frac{1}{3}} + s^{\frac{5}{2}}\right)} = \int_0^v v\,dv$$

$$0.8351 = \frac{1}{2}v^2$$

$$v = 1.29 \text{ ft/s} \qquad \textbf{Ans.}$$

Ans:
$v = 1.29$ ft/s

Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

12–11.

A particle is moving along a straight line such that its velocity is defined as $v = (-4s^2)$ m/s, where s is in meters. If $s = 2$ m when $t = 0$, determine the velocity and acceleration as functions of time.

SOLUTION

$$v = -4s^2$$

$$\frac{ds}{dt} = -4s^2$$

$$\int_2^s s^{-2}\, ds = \int_0^t -4\, dt$$

$$-s^{-1}\Big|_2^s = -4t\Big|_0^t$$

$$t = \frac{1}{4}(s^{-1} - 0.5)$$

$$s = \frac{2}{8t + 1}$$

$$v = -4\left(\frac{2}{8t + 1}\right)^2 = -\frac{16}{(8t + 1)^2}\ \text{m/s} \qquad \textbf{Ans.}$$

$$a = \frac{dv}{dt} = \frac{16(2)(8t + 1)(8)}{(8t + 1)^4} = \frac{256}{(8t + 1)^3}\ \text{m/s}^2 \qquad \textbf{Ans.}$$

Ans:

$$v = -\frac{16}{(8t + 1)^2}\ \text{m/s}$$

$$a = \frac{256}{(8t + 1)^3}\ \text{m/s}^2$$

Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual

© 2027 by R.C. Hibbeler. Published by Pearson Education, Inc., Hoboken, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***12–12.**

The speed of a particle traveling along a straight line within a liquid is measured as a function of its position as $v = (100 - s)$ mm/s, where s is in millimeters. Determine (a) the particle's deceleration when it is located at point A, where $s_A = 75$ mm, (b) the distance the particle travels before it stops, and (c) the time needed to stop the particle.

SOLUTION

(a) $a\,ds = v\,dv$

$$a = v\frac{dv}{ds} = (100 - s)(-1) = s - 100$$

When $s = s_A = 75\text{ mm}$, $a = 75 - 100 = -25\text{ mm/s}^2$ **Ans.**

(b) $v = 100 - s$

$0 = 100 - s \qquad s = 100\text{ mm}$ **Ans.**

(c) $v = \dfrac{ds}{dt}$

$$dt = \frac{ds}{v} = \frac{ds}{100 - s}$$

$$\int_0^t dt = \int_0^{100} \frac{ds}{100 - s}$$

$t = -\ln(100 - s)\big|_0^{100} \rightarrow \infty$ **Ans.**

Ans:
(a) $a_A = -25\text{ mm/s}^2$
(b) $s = 100\text{ mm}$
(c) $t \rightarrow \infty$

Engineering Mechanics - Dynamics 16th edition Hibbeler Solutions Manual